

PROJECT OWNER:


Super Petroleum 20 Travel Center
397 Rockhouse Road, Cordele Ga 31015
770-652-1641

PROJECT ARCHITECTS

TA DESIGN GROUP, INC
MICHAEL A THOMAS, RA
POB 81226
CHAMBLEE, GA 30366
864-553-2474




LOCATION MAP

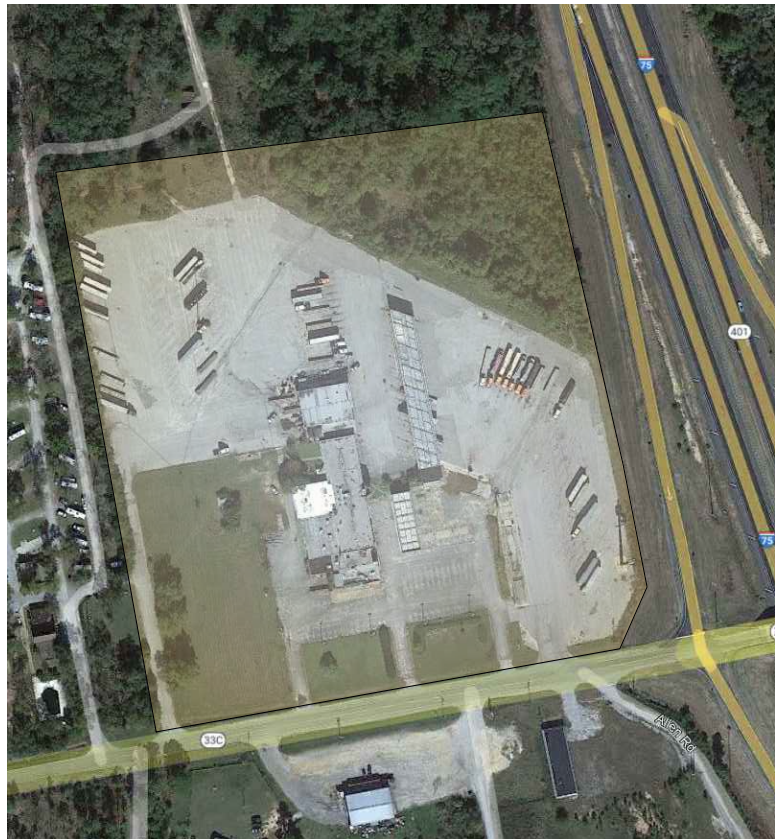

SITE MAP



DRAWING SYMBOLS

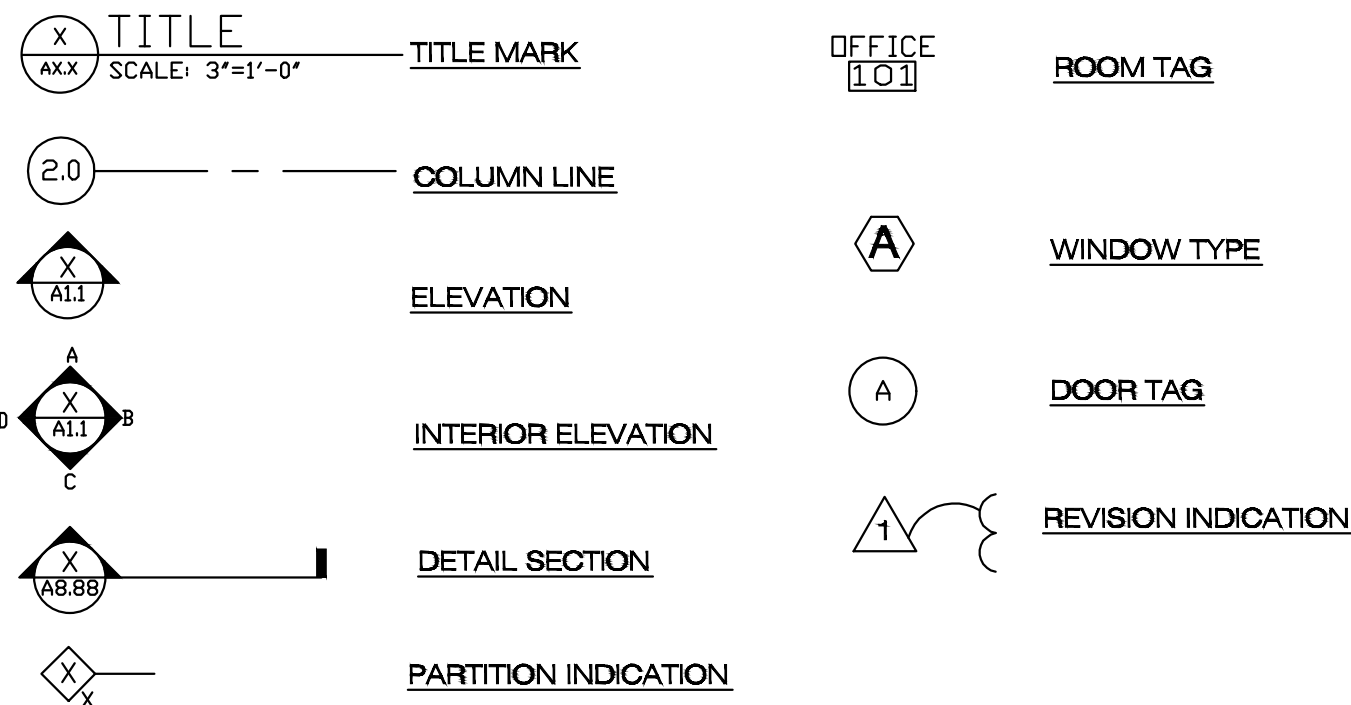

CONSTRUCTION NOTES:

- ALL DIMENSIONS ARE FROM SUBSTRATE.
- DO NOT SCALE DRAWINGS.
- NOTIFY ARCHTRECT OF ANY DISCREPANCIES WITHIN THE DRAWINGS PRIOR TO PROCEEDING WRTH CONSTRUCTION.
- ALL WORK SHALL COMPLY WUH APPLICABLE STATE, FEDERAL AND LOCAL CODES AND ALL NECESSARY UCNSESAND PERMITS SHALL BE OBTAINED BY THE CONTRACTOR UNLESS PREVIOUSLY OBTAINED BY THE OWNER.
- UNLESS NOTED OTHERWISE, ALL CONCRETE SHALL BE OF NOMINAL WEIGHT AND HAVE A MIN. 20 DAY STRENGTH OF 3000 PSI.
- REINFORCING STEEL SHALL CONFORM TO ASTM B15, GRADE 60.
- ALL MECHANICAL EQUIPMENT REQUIRING ELECTRICAL POWER SHALL BE INSTALLED WITH DISCONNECT SWITCHES AT EACH PIECE OF EQUIPMENT.
- ALL MECHANICAL EQUIPMENT AND SYSTEMS SHALL BE GUARANTEED FOR A PERIOD OF ONE YEAR AFTER ACCEPTANCE BY OWNER.
- HVAC COMPRESSOR SHALL HAVE EXTENDED 5-YEAR MANUFACTURERS WARRANTY.
- CONTRACTOR SHALL COORDINATE THE INSTALLATION OF ALL MECHANICAL EQUIPMENT, DUCTWORK, ETC. TO FIT WITHIN THE SPACE ALLOWED BY THE ARCHITECTURAL CONDITIONS.
- MOUNT THERMOSTAT AND SENSORS 4'-0" A.F.F.
- SANFARY AND DRAINAGE PIPING SHALL BE SLOPED AT 1/4" PER FOOT.
- ALL BATHROOM FIXTURES AND VALVES SHALL BE PROVIDED WIADDOMNAL BLOCKING AS REQUIRED TO RIGIDLY SECURE TO ADJACENT STRUCTURE.
- ALL PLUMBING EQUIPMENT AND SYSTEMS SHALL BE GUARANTEED FOR A MINIMUM OF ONE YEAR AFTER FINAL ACCEPTANCE.
- ALL WORK SHALL BE PERFORMED IN A FINISHED WORKMANLIKE MANNER TO THE ENTIRE SATISFACTION OF THE OWNER, AND IN ACCORDANCE WPTH THE CONTRACT DOCUMENTS AND THE BEST RECOGNIZED TRADE PRACTICES.
- ALL WORK SHALL BE COORDINATED WTH ALL TRADE DISCIPLINES TO ENSURE PROPER EXECUTION OF THE WORK.
- UNLESS NOTED OTHERWISE, DOORS ARE LOCATED 4" FROM FINISHED FACE OF THE WALL ADJACENT TO THE HINGE JAMB.
- CONTRACTOR TO PROVIDE ONE SET OF AS-BUILT DRAWINGS TO THE OWNER.
- INSTALL CONTINUOUS BLOCKING BETWEEN STUDS FOR ALL HANDRAILS, GRAB BARS, ACCESSORIES, FIXTURES, BRACKETS, HUNG CABINETWORK AND MISC. SPECIALTIES UNLESS OTHERWISE NOTED.
- ALL PIPE, DUCT, ETC., IN FINISH AREAS SHALL BE CONTAINED WITHIN WALLS OR FURRING UNLESS OTHERWISE NOTED.
- ANY WOOD IN CONTACT WITH CONCRETE, MASONRY OR SOIL, SHALL BE PRESSURE TREATED.
- WHERE CONNECTIONS ARE NOT SHOWN ON THE DRAWING, COMPLY WITH NAILING SCHEDULE IN THE BUILDING CODE.
- ALL NAILS AT NON-AIRCNDMIONED/HEATED AREAS SHALL BE GALVANIZED.
- ALL INTERIOR FINISHES, SMOKE DEVELOPMENT, FLAME SPREAD RATINGS, ETC. SHALL COMPLY WTH 2MB INTERNATIONAL BUILDING CODE CHAPTER 8.
- TENANT IS RESPONSIBLE FOR ADA LIFE SAFETY COMPLIANCE.

BUILDING CODE REFERENCE

THE COUNTY CONSTRUCTION CODE (2015 VERSION)
STATE MINIMUM STANDARD CODES:
INTERNATIONAL BUILDING CODE, 2018 EDITION WITH 2020 GEORGIA STATE AMENDMENTS.
INTERNATIONAL EXISTING BUILDING CODE (IEBC):2018 EDITION WITH 2021 AMENDMENTS.
INTERNATIONAL MECHANICAL CODE, 2018 EDITION WITH 2020 GEORGIA STATE AMENDMENTS
INTERNATIONAL PLUMBING CODE, 2018 EDITION WITH 2020 GEORGIA STATE AMENDMENTS
INTERNATIONAL FUEL GAS CODE, 2018 EDITION WITH 2020 GEORGIA STATE AMENDMENTS
NFPA NATIONAL ELECTRICAL CODE, 2020 EDITION WITH 2021 AMENDMENTS
INTERNATIONAL ENERGY CONSERVATION CODE, 2015 EDITION WITH 2020 GEORGIA STATE AMENDMENTS
ISTATE AMENDMENTS AND IBC APPENDIX "F"
INTERNATIONAL EXISTING BUILDING CODE:2012 EDITION WITH 2015 GEORGIA STATE AMENDMENTS
NFPA 101 LIFE SAFETY CODE:2018 EDITION
2010 ADA STANDARDS

BUILDING TYPE "B"
CONSTRUCTION TYPE "III-B"
TOTAL SF = 12000sf (see dwg A-006 for area increase)
MATERIALS OF CONSTRUCTION

ROOF - METAL
INTERIOR WALLS - METAL STUDS & GYPBD
EXTERIOR WALLS - METAL BUILDING STUDS , STONE, STOREFRONT, METAL SIDING & STUCCO
FLOOR - SLAB ON GRADE
NON SPRINKLED

DRAWING ABBREVIATIONS

AC	ACOUSTIC	FE	FIRE EXTINGUISHER
ADJ	ADJUSTABLE	FEC	FIRE EXTINGUISHER CABINET
AFF	ABOVE FINISH FLOOR	GW	GYP
AL	ALUMINUM	GW	GYP
ALT	ALTERNATE	HDR	HEADER
APPROX.	APPROXIMATE	HDWD	HARDWOOD
ARCH	ARCHITECTURAL	HDWR	HARDWARE
BLDG	BUILDING	HM	HOLLOW METAL
BLKG	BLOCKING	HORIZ	HORIZONTAL
CEM	CEMENT	HVAC	HEATING, VENTILATING & AIR CONDITIONING
CER	CERAMIC	INSUL	INSULATION
CL	CENTERLINE	INT	INTERIOR
CMU	CONCRETE MASONRY UNIT	INT	INTERIOR
CONT	CONTINUOUS	KIT	KITCHEN
DIA	DIAMETER	LAM	LAMINATED
DIM	DIMENSION	LAV	LAVATORY
EXT	EXTERIOR	P LAM	PLASTIC LAMINATE
EXST	EXISTING	SPEC	SPECIFICATION
FD	FLOOR DRAIN	TYP.	TYPICAL
		V.I.F.	VERIFY IN FIELD




CORDELE TRAVEL CENTER

I-75 CORDELE GA

DRAWING LIST

A000 COVER SHEET	A487 INTERIOR ELEVATIONS	M-100
A121 ENL'D FLOOR PLAN	A488 INTERIOR ELEVATIONS	M-101
A122 ENL'D FLOOR PLAN	A489 INTERIOR ELEVATIONS	M-200
A1401ST FLOOR RFC PLAN	A490 INTERIOR ELEVATIONS	P-100
A141 DIMENSION PLAN (INT)	A491 INTERIOR ELEVATIONS	P-200
A142 FINISHED FLOOR FINISH	A492 INTERIOR ELEVATIONS	P-300
A150 ROOF PLAN	A492 INTERIOR ELEVATIONS	E-001
A300 ELEVATIONS	A493 INTERIOR ELEVATIONS	E-100
A350 BUILDING SECTIONS	A494 INTERIOR ELEVATIONS	E-101
A360 WALL SECTIONS	A-601 DOORWINDOWS	E-200
A-361 WALL SECTIONS	A900 PLUMBINGLAOUT PLAN	E-301
A4S0 INTERIOR ELEVATIONS	A910 ELECTRICAL LAYOUT	
A481 INTERIOR ELEVATIONS	S-0	
A482 INTERIOR ELEVATIONS	S-0.1	
A483 INTERIOR ELEVATIONS	S-1	
A484 INTERIOR ELEVATIONS	S-2	
A485 INTERIOR ELEVATIONS	S-3	
A486 INTERIOR ELEVATIONS	S-4	

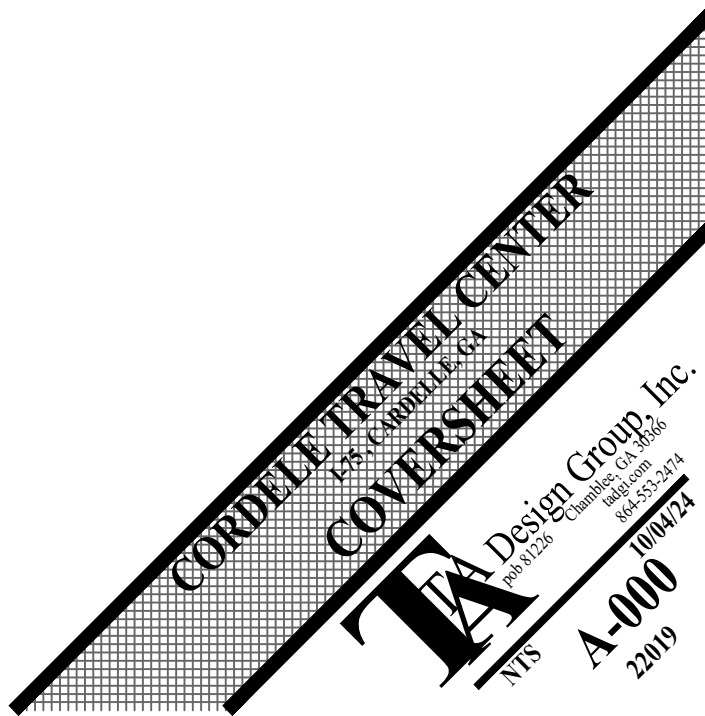

FIRE EXTINGUISHERS:
SHALL BE LOCATED PER THE REQUIREMENTS OF NFPA 10. THE SIZE SHALL BE A MINIMUM OF _2_ A _10_ BC, _ _ IS/ARE REQUIRED AND SHALL BE INSTALLED AT A MAXIMUM OF 48" ABOVE THE FINISHED FLOOR TO THE TOP OF THE HANDLE. (ONE EXTINGUISHER IN EACH SPACE)

IDENTIFICATION OF FIRE BARRIERS:
SHALL BE BY SIGNS OR STENCILING PERMANENTLY INSTALLED ON ALL RATED BARRIERS OR WALLS, ABOVE ANY DECORATIVE CEILING AND/OR IN CONCEALED SPACES. THE LETTERING SHALL BE 2" IN HEIGHT AND SPACED EVERY 12 FT. THE FOLLOWING WORDING IS RECOMMENDED " _1-2_ HOUR FIRE AND SMOKE BARRIER PROTECT ALL OPENINGS",

DOOR HARDWARE:

HANDLES, PULLS, LATCHES, LOCKS, AND OTHER OPERATING DEVICES ON ACCESSIBLE DOORS SHALL HAVE A SHAPE THAT IS EASY TO GRASP WITH ONE HAND AND DOES NOT REQUIRE TIGHT GRASPING, TIGHT PINCHING, OR TWISTING OF THE WRIST TO OPERATE. LEVER-OPERATED MECHANISMS, PUSH-TYPE MECHANISMS, AND U-SHAPED HANDLES ARE ACCEPTABLE DESIGNS. GEORGIA ACCESSIBILITY CODE.

DOOR LOCKS:

IF PROVIDED, SHALL NOT REQUIRE THE USE OF A KEY, A TOOL, OR SPECIAL KNOWLEDGE OR EFFORT FOR OPERATION FROM THE EGRESS SIDE., NFPA 101 LIFE SAFETY CODE, SECTION 7.2.1.5.3, 2012 EDITION.

HANDRAIL DETAILS:

NEW HANDRAILS ON STAIRS AND RAMPS SHALL BE PROVIDED ON BOTH SIDES AND SHALL NOT BE LESS THAN 34 INCHES AND NOT MORE THAN 38 INCHES, ABOVE THE SURFACE OF THE TREAD, MEASURED VERTICALLY TO THE TOP OF THE RAIL FROM THE LEADING EDGE OF THE TREAD. NFPA LIFE SAFETY CODE 2012 EDITION SECTION 7.2.2.4 AND THE 2010 ADA ACCESSIBILITY DESIGN.

PANIC HARDWARE:
PANIC HARDWARE AND FIRE EXIT HARDWARE IS REQUIRED BY THE APPROPRIATE OCCUPANCY CHAPTER IT SHALL BE PROVIDED FOR ALL EXIT DOORS AND MEET THE REQUIREMENTS OF SECTION 7.2.1.7 OF NFPA 101 LIFE SAFETY CODE 2018 EDITION.

LIFE SAFETY LEGEND

TRAVEL PATH

EXIT

EXIT SIGN W/ EMERGENCE LIGHTS

FIRE EXTINGUISHER CABINET

FIRE EXTINGUISHER

##


EXIT CAPACITY

LIFE SAFETY LEGEND

1 HR RATING

2 HR RATING

OCCUPANCY LOAD					
FUNCTION	USE AREA SF	LOAD FACTOR	PERSONS	REQ'D WIDTH	AVAILABLE WIDTH
STORAGE	279	300	1	0.2	0.19
SALES	3572	60	60	0.2	11.91
SEATING	1599	15	107	0.2	21.32
KITCHEN	1917	200	10	0.2	1.92
TOTALS			177	35.33	252

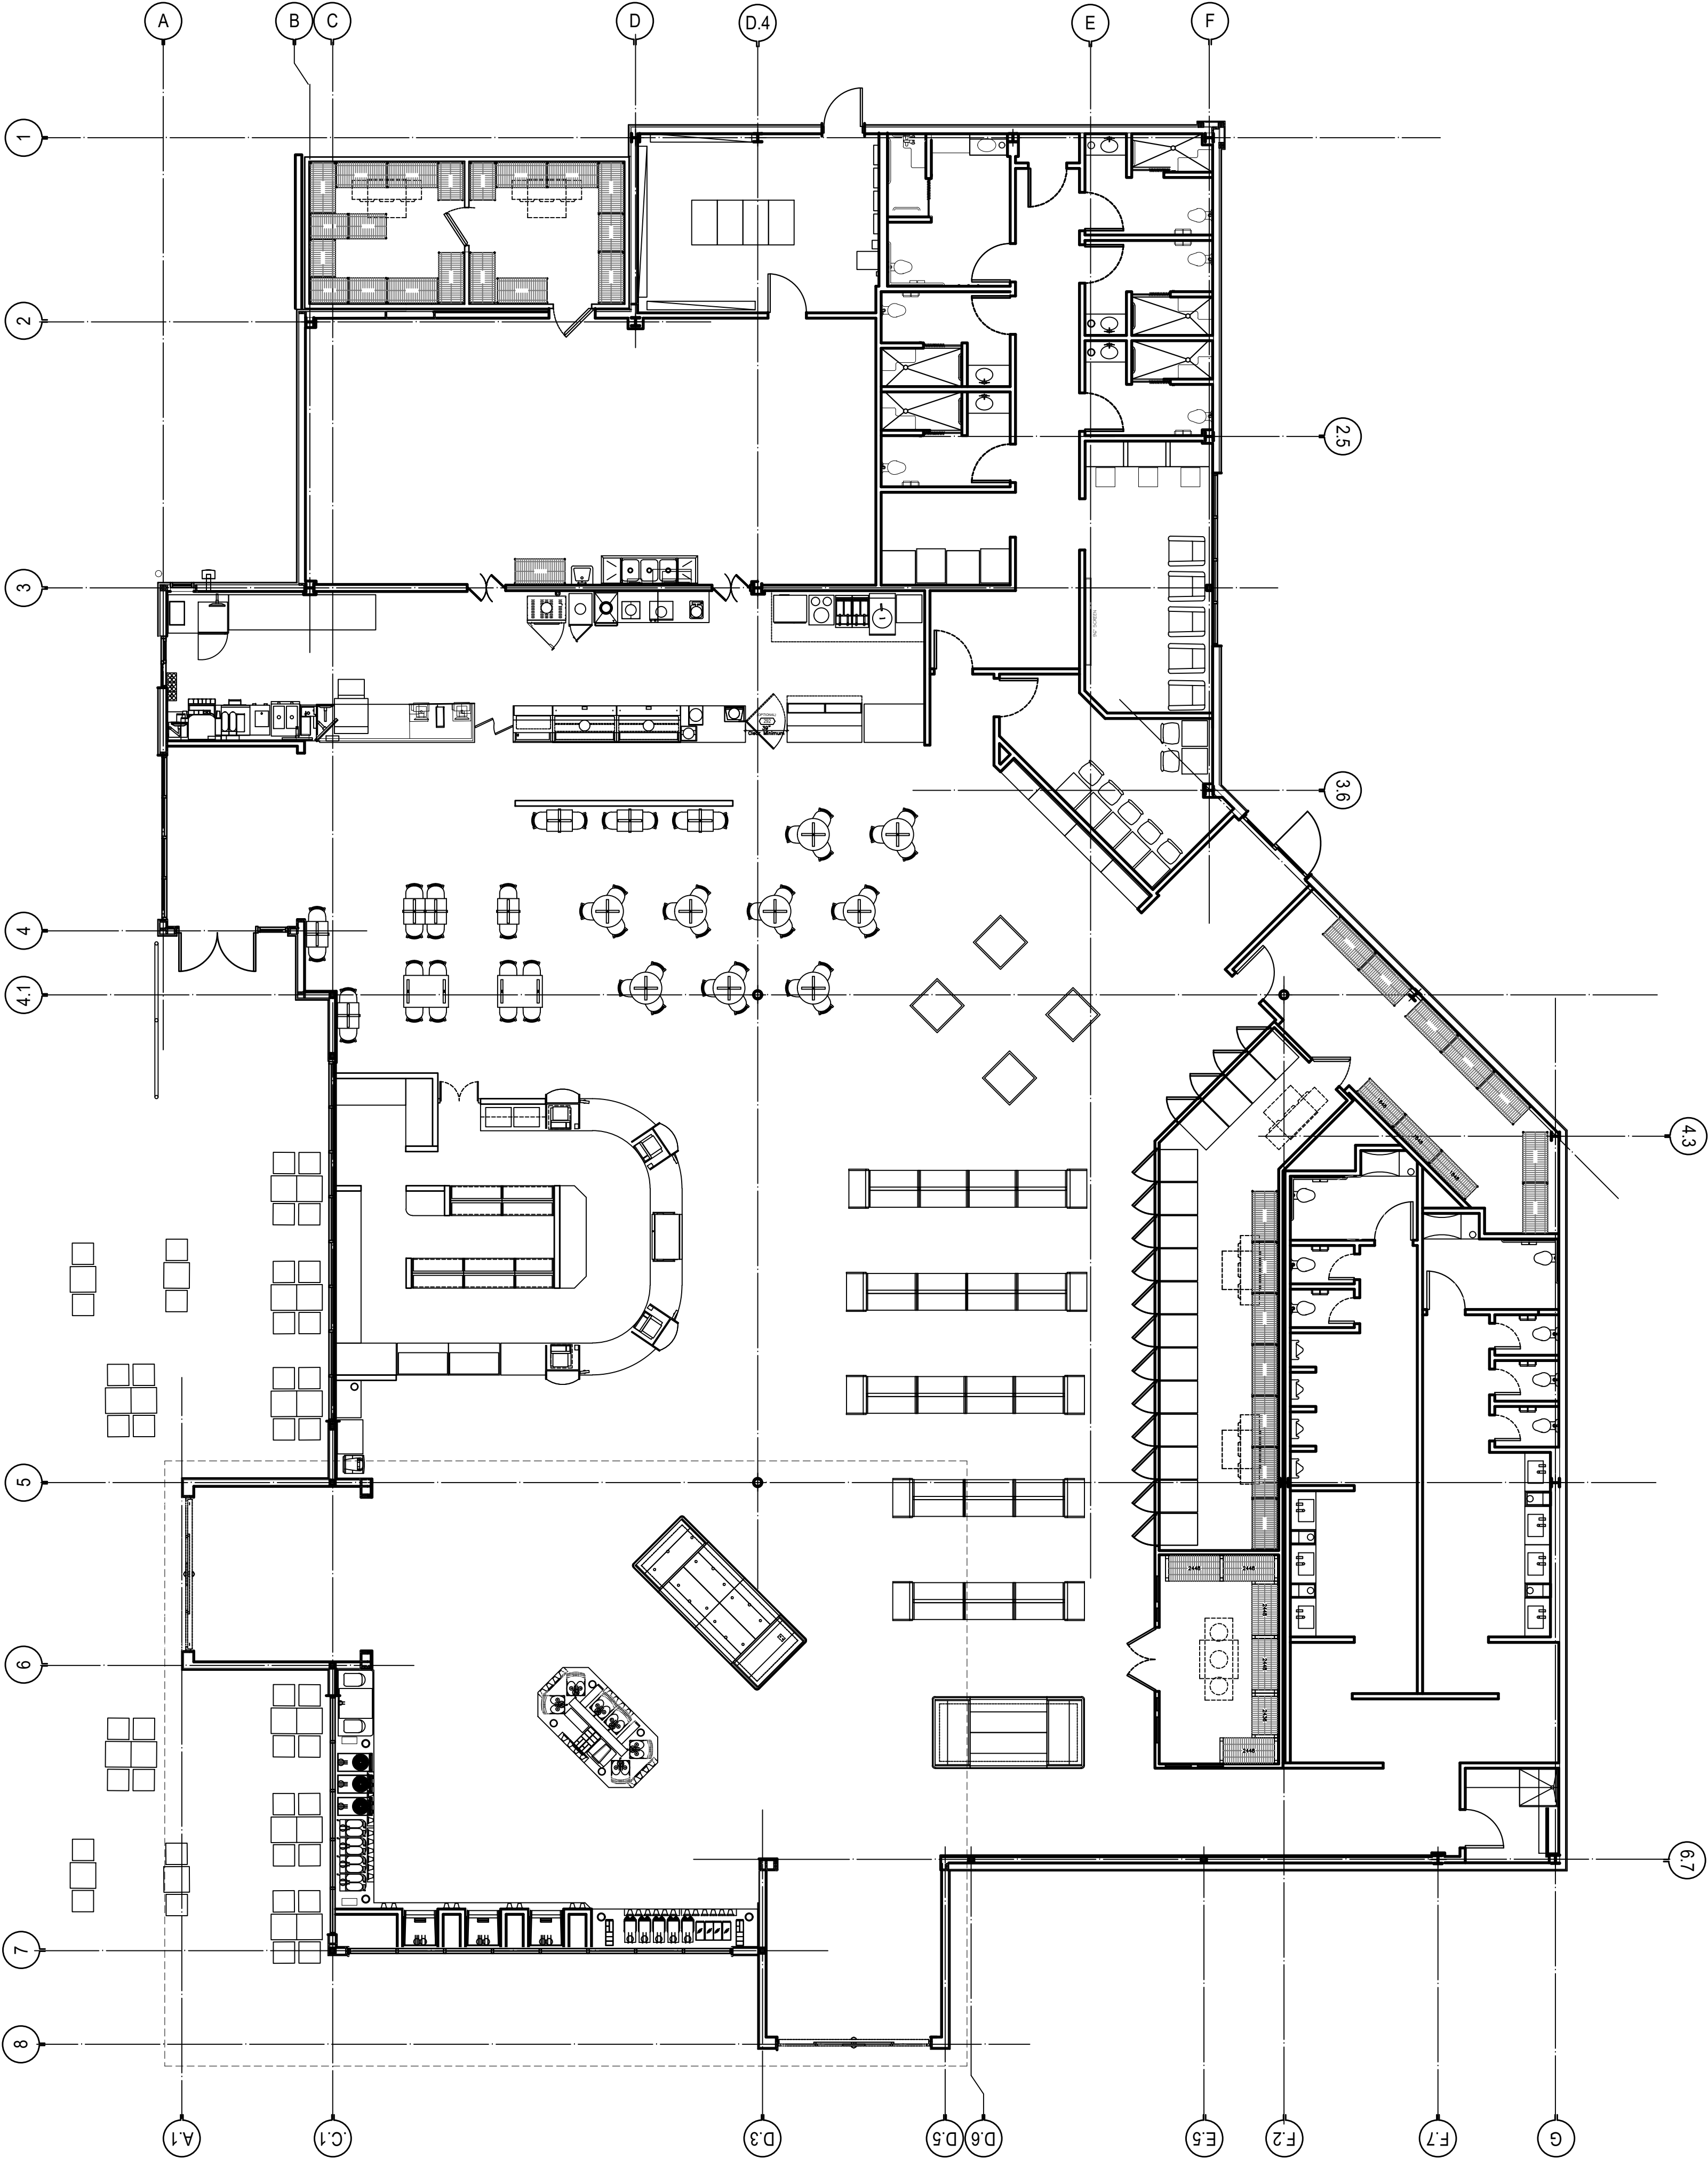

PARAGON

SOLUTIONS

201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-827-7171

CARDALE TRAVEL CENTER

ARCHITECTURAL

LIFE SAFETY PLAN

Design Group, Inc.

10000 DALLAS, TEXAS 75243

10000

A-020

2017

GENERAL NOTES

COMPLETE ALL DEMOLITION WORK INDICATED OR NECESSARY FOR THE COMPLETION OF THE (N) WORK (N)CLOUING LABOR SUPERVISION. TOOLS, MATERIALS, PERMITS, ETC. REQUIRED FOR REMOVAL OF (E) FLOORS, WALLS, CEILINGS, FIXTURES, DUCTWORK & ETC.

1) ALL WORK MUST COMPLY WITH APPLICABLE LOCAL, STATE & FEDERAL CODES, STANDARDS & ETC.

2) WORKMANSHIP SHALL BE FIRST CLASS, NEAT & SAFE THROUGHOUT & PERFORMED BY COMPETENT AND EXPERIENCED WORKMAN. CONSTANT SUPERVISION OR WORK BY G.C. SHALL BE MAINTAINED.

3) UPON TERMINATION OF WORK PROMPTLY REMOVE ALL TOOLS, SCAFFOLDS, SURPLUS MATERIALS, DEBRIS, RUBBISH & OTHER ITEMS RESULTING FROM THE DEMOLITION WORK.

4) THE OWNER, ARCHITECT, DESIGNER ASSUME NO RESPONSIBILITY FOR ACTUAL CONDITION OF STRUCTURES, EQUIPMENT & ETC. TO BE DEMOLISHED.

5) OWNER RESERVES THE RIGHT OF REMOVE & SALVAGE ITEMS PRIOR TO THE START OF THE WORK SUCH AS DOOR(S), WINDOW(S), HARDWARE, LIGHT FIXTURE(S), PLUMBING FIXTURE(S), ETC. U.O.N..

6) REMOVE ITEMS WITH CARE & STACK NEATLY. NO SPECIAL CLEANING & STRIPPING OF SALVAGE ITEMS ARE REQUIRED UNLESS THEY ARE TO BE REINSTALLED.

7) REMOVE ITEMS FORM PREMISES AS WORK PROGRESSES. STORE OR SALE OF ITEMS ON SITE IS NOT PERMITTED WITHOUT OWNER'S PERMISSION.

8) USE OF EXPLOSIVES WILL NOT BE PERMITTED.

9) CONDUCT DEMOLITION & REMOVAL OF DEBRIS TO INSURE MINIMUM INTERFERENCE WITH ROADS, STREETS, WALKS & OTHER ADJACENT OCCUPIED OR USED FACILITIES.

10) PROVIDE PROTECTIVE DEVICES TO INSURE THE SAFE PASSAGE OF PERSONS AROUND THE DEMOLITION AREA. CONDUCT OPERATIONS TO PREVENT DAMAGE BY FALLING DEBRIS TO ADJACENT BUILDINGS, TREES, STRUCTURES, PERSONS & ETC. PROVIDE INTERIOR & EXTERIOR SHORING, BRACING S ETC. TO PREVENT MOVEMENT, SETTLEMENT OR COLLAPSE OF STRUCTURES TO BE DEMOLISHED & FACILITIES TO REMAIN. IF REQUIRED ERECT A 2 X 4 FRAME WITH MINIMUM 1/2" EXT. PLYWOOD SHEATHING CONSTRUCTION BARRIER SHALL BE 8MT HIGH & HAVE A LOCKED DOOR FOR ACCESS. THE TOP PLATE SHALL BE BRACED BACK TO BUILDING STRUCTURE MINIMUM AMOUNT OF POWER SHOOTS INTO SIDEWALK (MAKE ANY REQUIRED REPAIRS TO SIDEWALK WHEN BARRIER IS REMOVED). LOCATE BARRIER NO MORE THAN 4'-0" FROM BUILDING LINE (LESS IF REQUIRED BY BUILDING DEPARTMENT).



11) PROVIDE ADEQUATE FIRE PROTECTION DURING DEMOLITION WORK. PLACE FIRE EXTINGUISHERS AT JOB SITE (TYPE & LOCATION AS DIRECTED BY FIRE INSPECTOR). ALSO ANY (E) SPRINKLER SYSTEM SHALL BE MAINTAINED & NOT SHUT DOWN (WHERE NECESSARY, PROVIDE TEMPORARY SUPPORT UNTIL (N) PIPING LAYOUT IS COMPLETED).

12) PROMPTLY REPAIR ALL DAMAGE CAUSED TO ADJACENT FACILITIES BY DEMOLITION WORK OR AS DIRECTED S AT NO ADDITIONAL COST OF OWNER.

13) SHUT OFF AND/OR DISCONNECT UTILITIES SERVICING THE PROJECT AS REQUIRED BY THE SCOPE OF WORK (IF POSSIBLE, REMOVE UTILITY LINES BACK TO MAIN SWITCHES, SHUT-OFF VALVES OR METERS. PROVIDE TEMPORARY POWER OUTLETS, LIGHTS, HOSE BIB WITH WATER TO ALLOW FOR PROPER DEMOLITION WORK.


14) USE SUITABLE METHODS AS NECESSARY TO LIMIT THE AMOUNT OF DUST & DIRT RISING AND SCATTERING IN THE AIR TO THE LOWEST LEVEL OF AIR POLLUTION PRACTICAL FOR THE CONDITION OF WORK (COMPLY WITH GOVERNING REGULATIONS).

15) G.C. SHALL INSURE THAT THE CONCRETE FLOOR IS SMOOTH & LEVEL TO RECEIVE (NO FLOORING MATERIAL AFTER DEMOLITION IS COMPLETED). THERE SHALL BE NO SLOPES GREATER THAN PROPOSED FLOOR SLOPES INDICATED IN THESE DRAWINGS. THIS WORK SHALL BE INCLUDED IN THE CONTRACTORS BID.

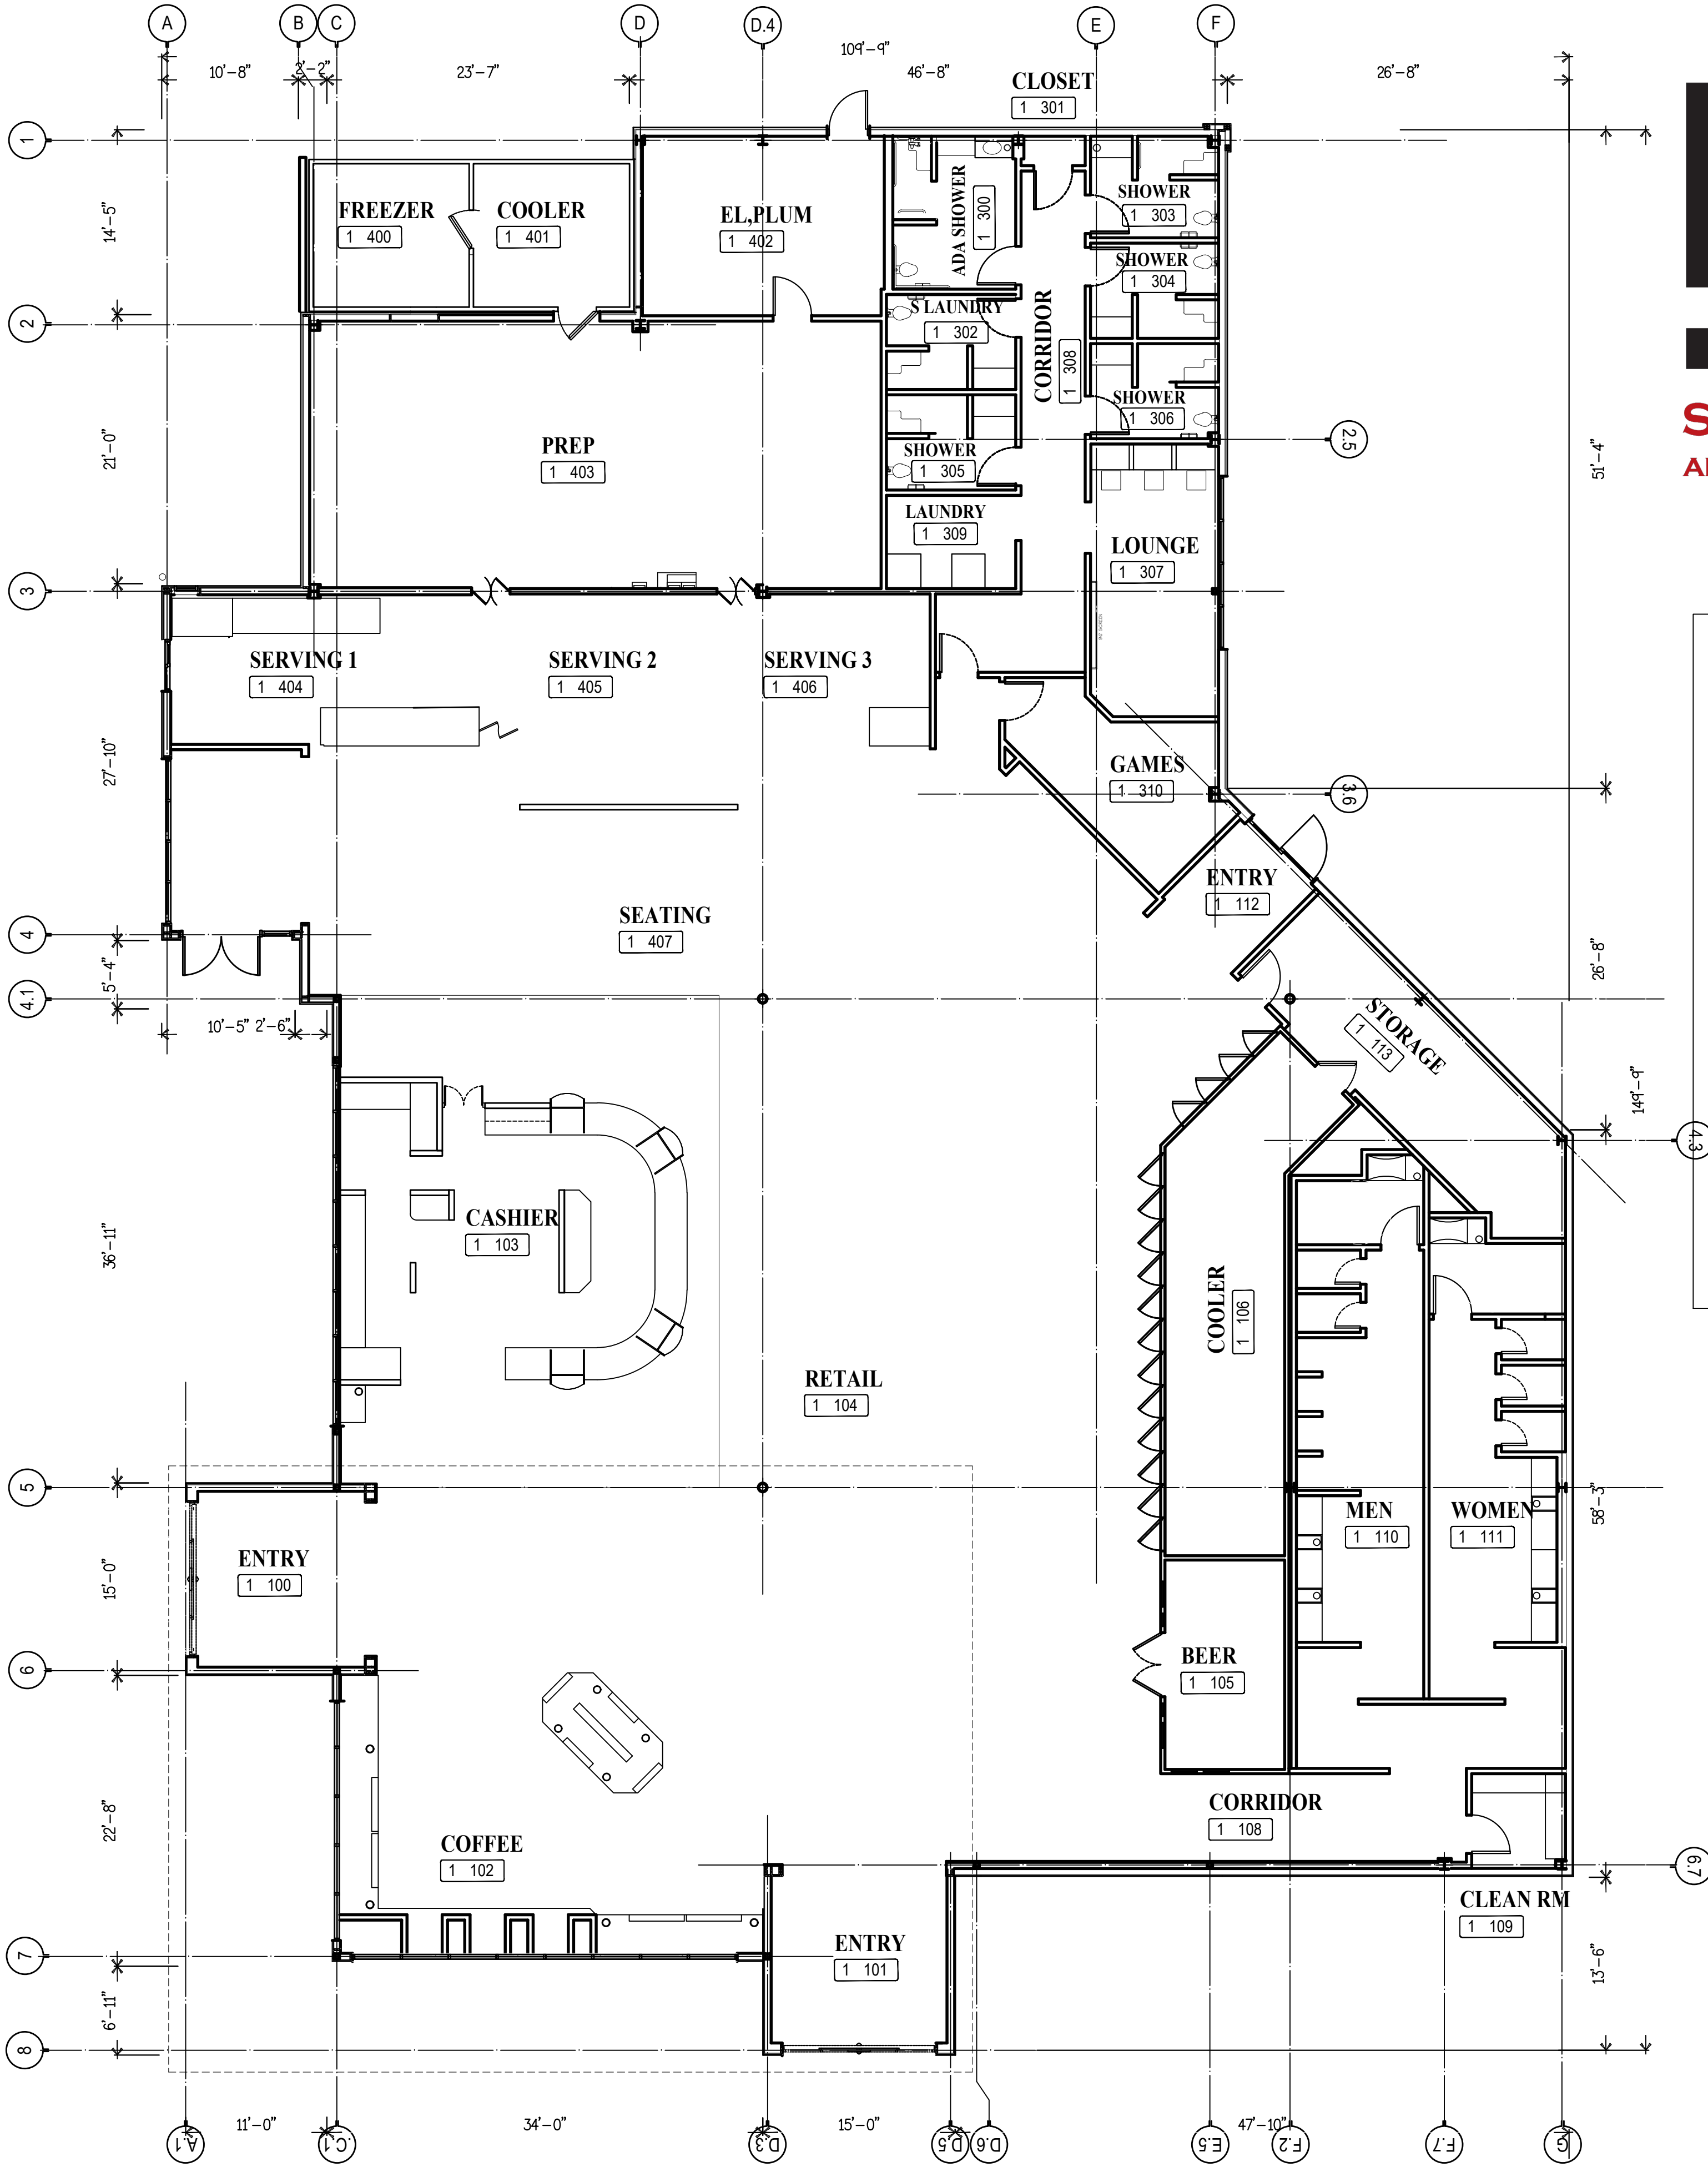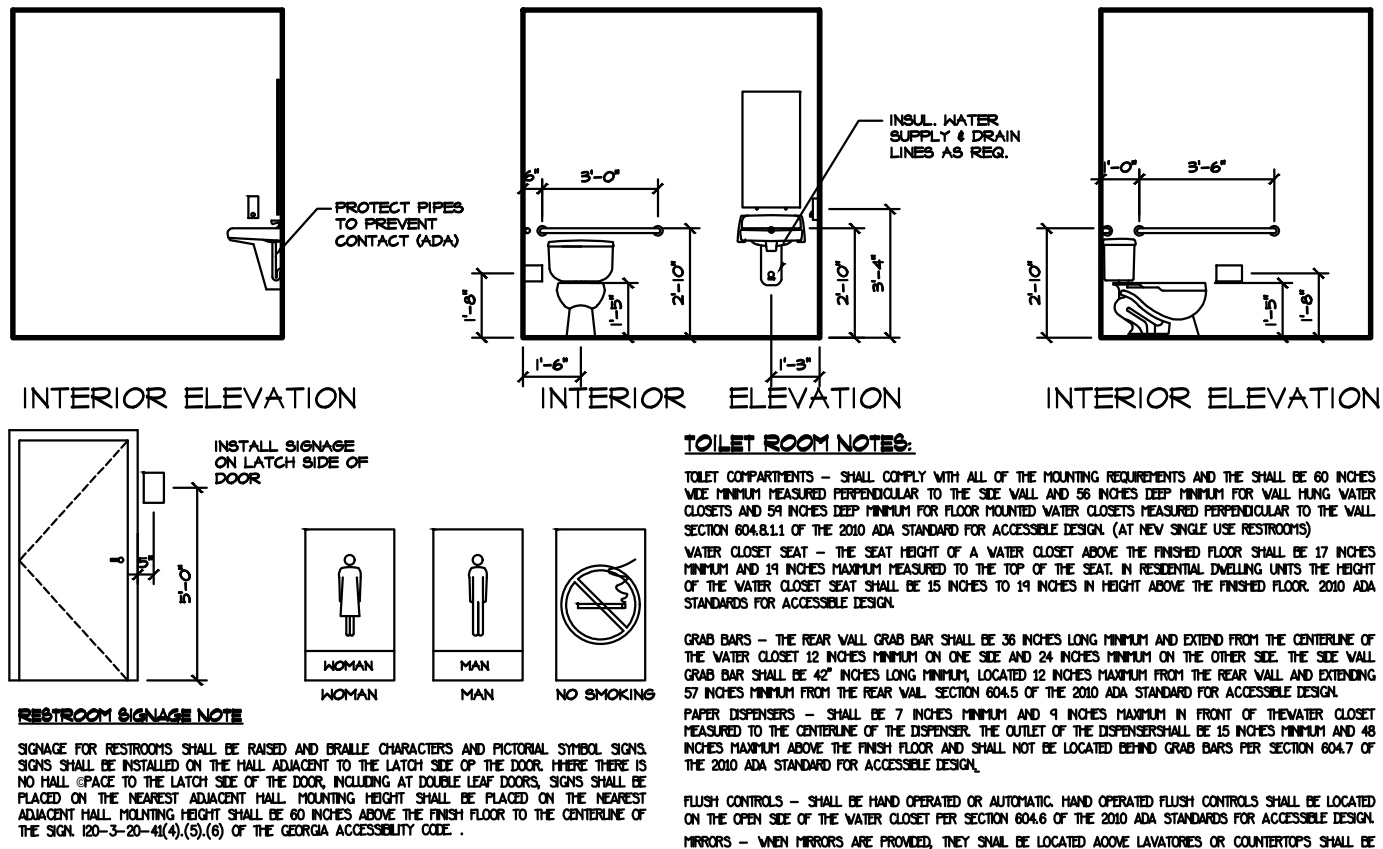

STROUD
AND COMPANY


PARAGON
SOLUTIONS

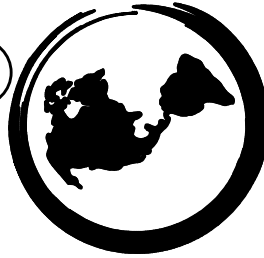

201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-927-7171


TRAVEL CENTER
CITY OF FORT WORTH
FIRST FLOOR PLAN
TA Design Group, Inc.
1001 W. 10TH STREET, SUITE 1100
FORT WORTH, TEXAS 76102
A-1100
2000



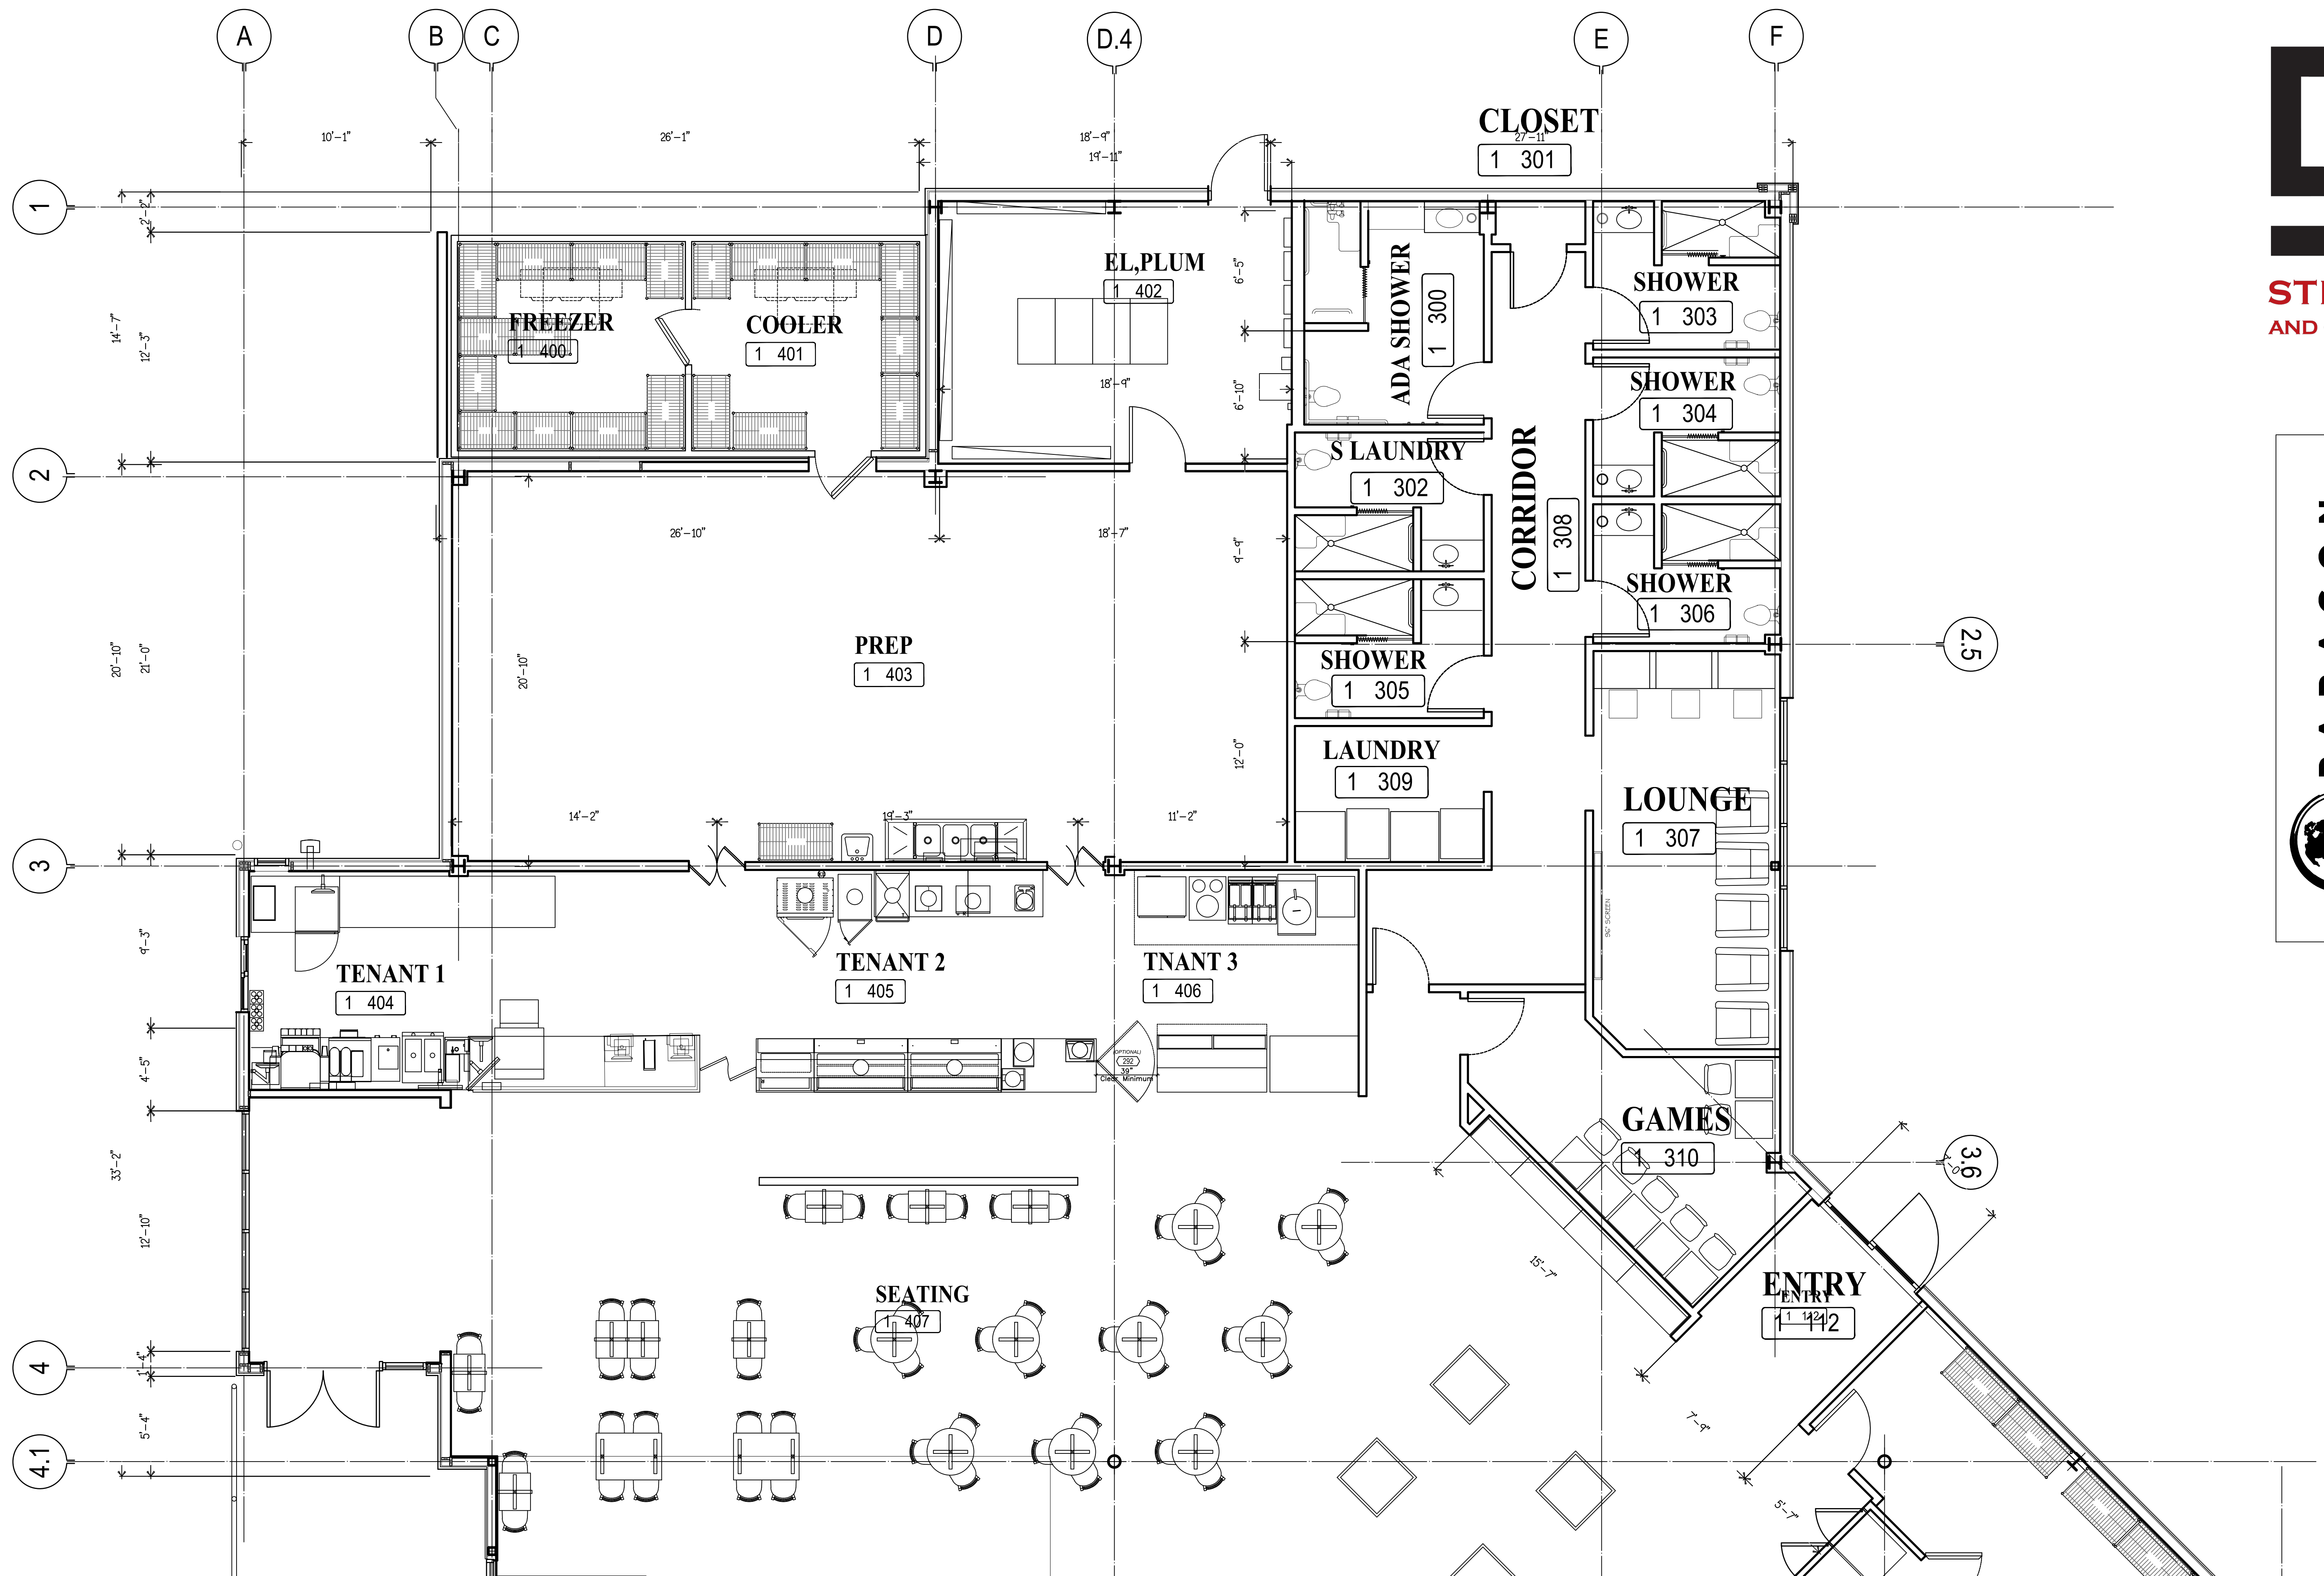



STROUD
AND COMPANY

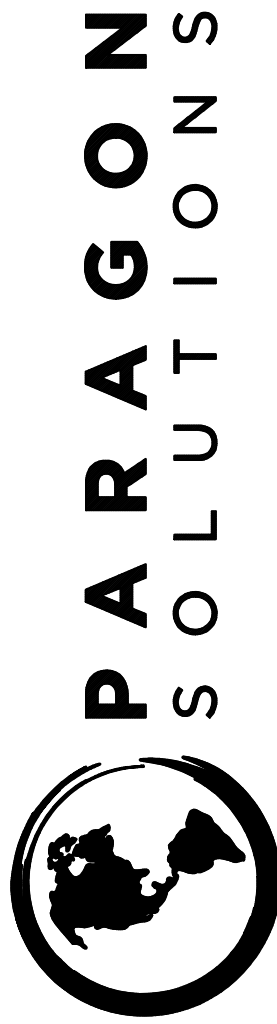


201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-927-7171


REFLECTED CEILING SYMBOL LEGEND		REFLECTED CEILING PLAN KEY		GENERAL NOTES
SYMBOL	DESCRIPTION			
	SURFACE DOWNLIGHT 4"			
	DECORATIVE PENDANT			
	DECORATIVE WALL SCONCE (PLUG-IN)			
	TRACK LIGHTING			
	EXTERIOR WALL SCONCE			
	EXTERIOR SURFACE DOWNLIGHT 4"			
	LINEAR FLUSH SURFACE MOUNT LED WRAP (FIXTURES IN STAIRS ARE WALL MOUNT)			
	EMERGENCY BATTERY PACK			
	EXT LIGHTS, SEE ELECTRICAL DWGS. & INTERIOR ELEVATIONS			
	EXHAUST FAN			
	DIFFUSERS (SUPPLY/RETURN)			
	FIRE ALARM SMOKE DETECTOR			
	FIRE ALARM HEAT DETECTOR			
	VIDEO SURVEILLANCE CAMERA			


CEILING TYPE LEGEND	
A	5/8" GYPSUM BOARD RATED ASSEMBLY, GUESTROOM BATHROOM CEILINGS TO BE MOISTURE RESISTANT & RATED GYPSUM BOARD.
B	SUSPENDED ACOUSTICAL CEILING TILE/GRID SYSTEM
C	LINEAR WOOD CEILING SYSTEM (MILLWORK) OVER CEILING TYPE 'A'.

REFLECTED CEILING PLAN KEY NOTES	
1	CENTER FIXTURE TO ROOM
2	DECORATIVE PENDANT FIXTURE
3	NOT USED.
4	GYP. SOFFIT
5	GYP. BULKHEAD
6	ACCESS PANELS FOR SLIDING DOOR MOTOR
7	CEILING MOUNT DUPLEX/DATA/TV RECEPTACLE TO BE INSTALLED BEHIND CEILING MOUNTED TV, SEE INTERIOR ELEVATIONS FOR TV LOCATION.
8	STAIRS: PROVIDE 2-HR HORIZONTAL SHAFT ASSEMBLY AT LEVEL 4 CEILING, SEE SYSTEM No. AER-09038 ON SHEET AT.05H FOR DETAILS.

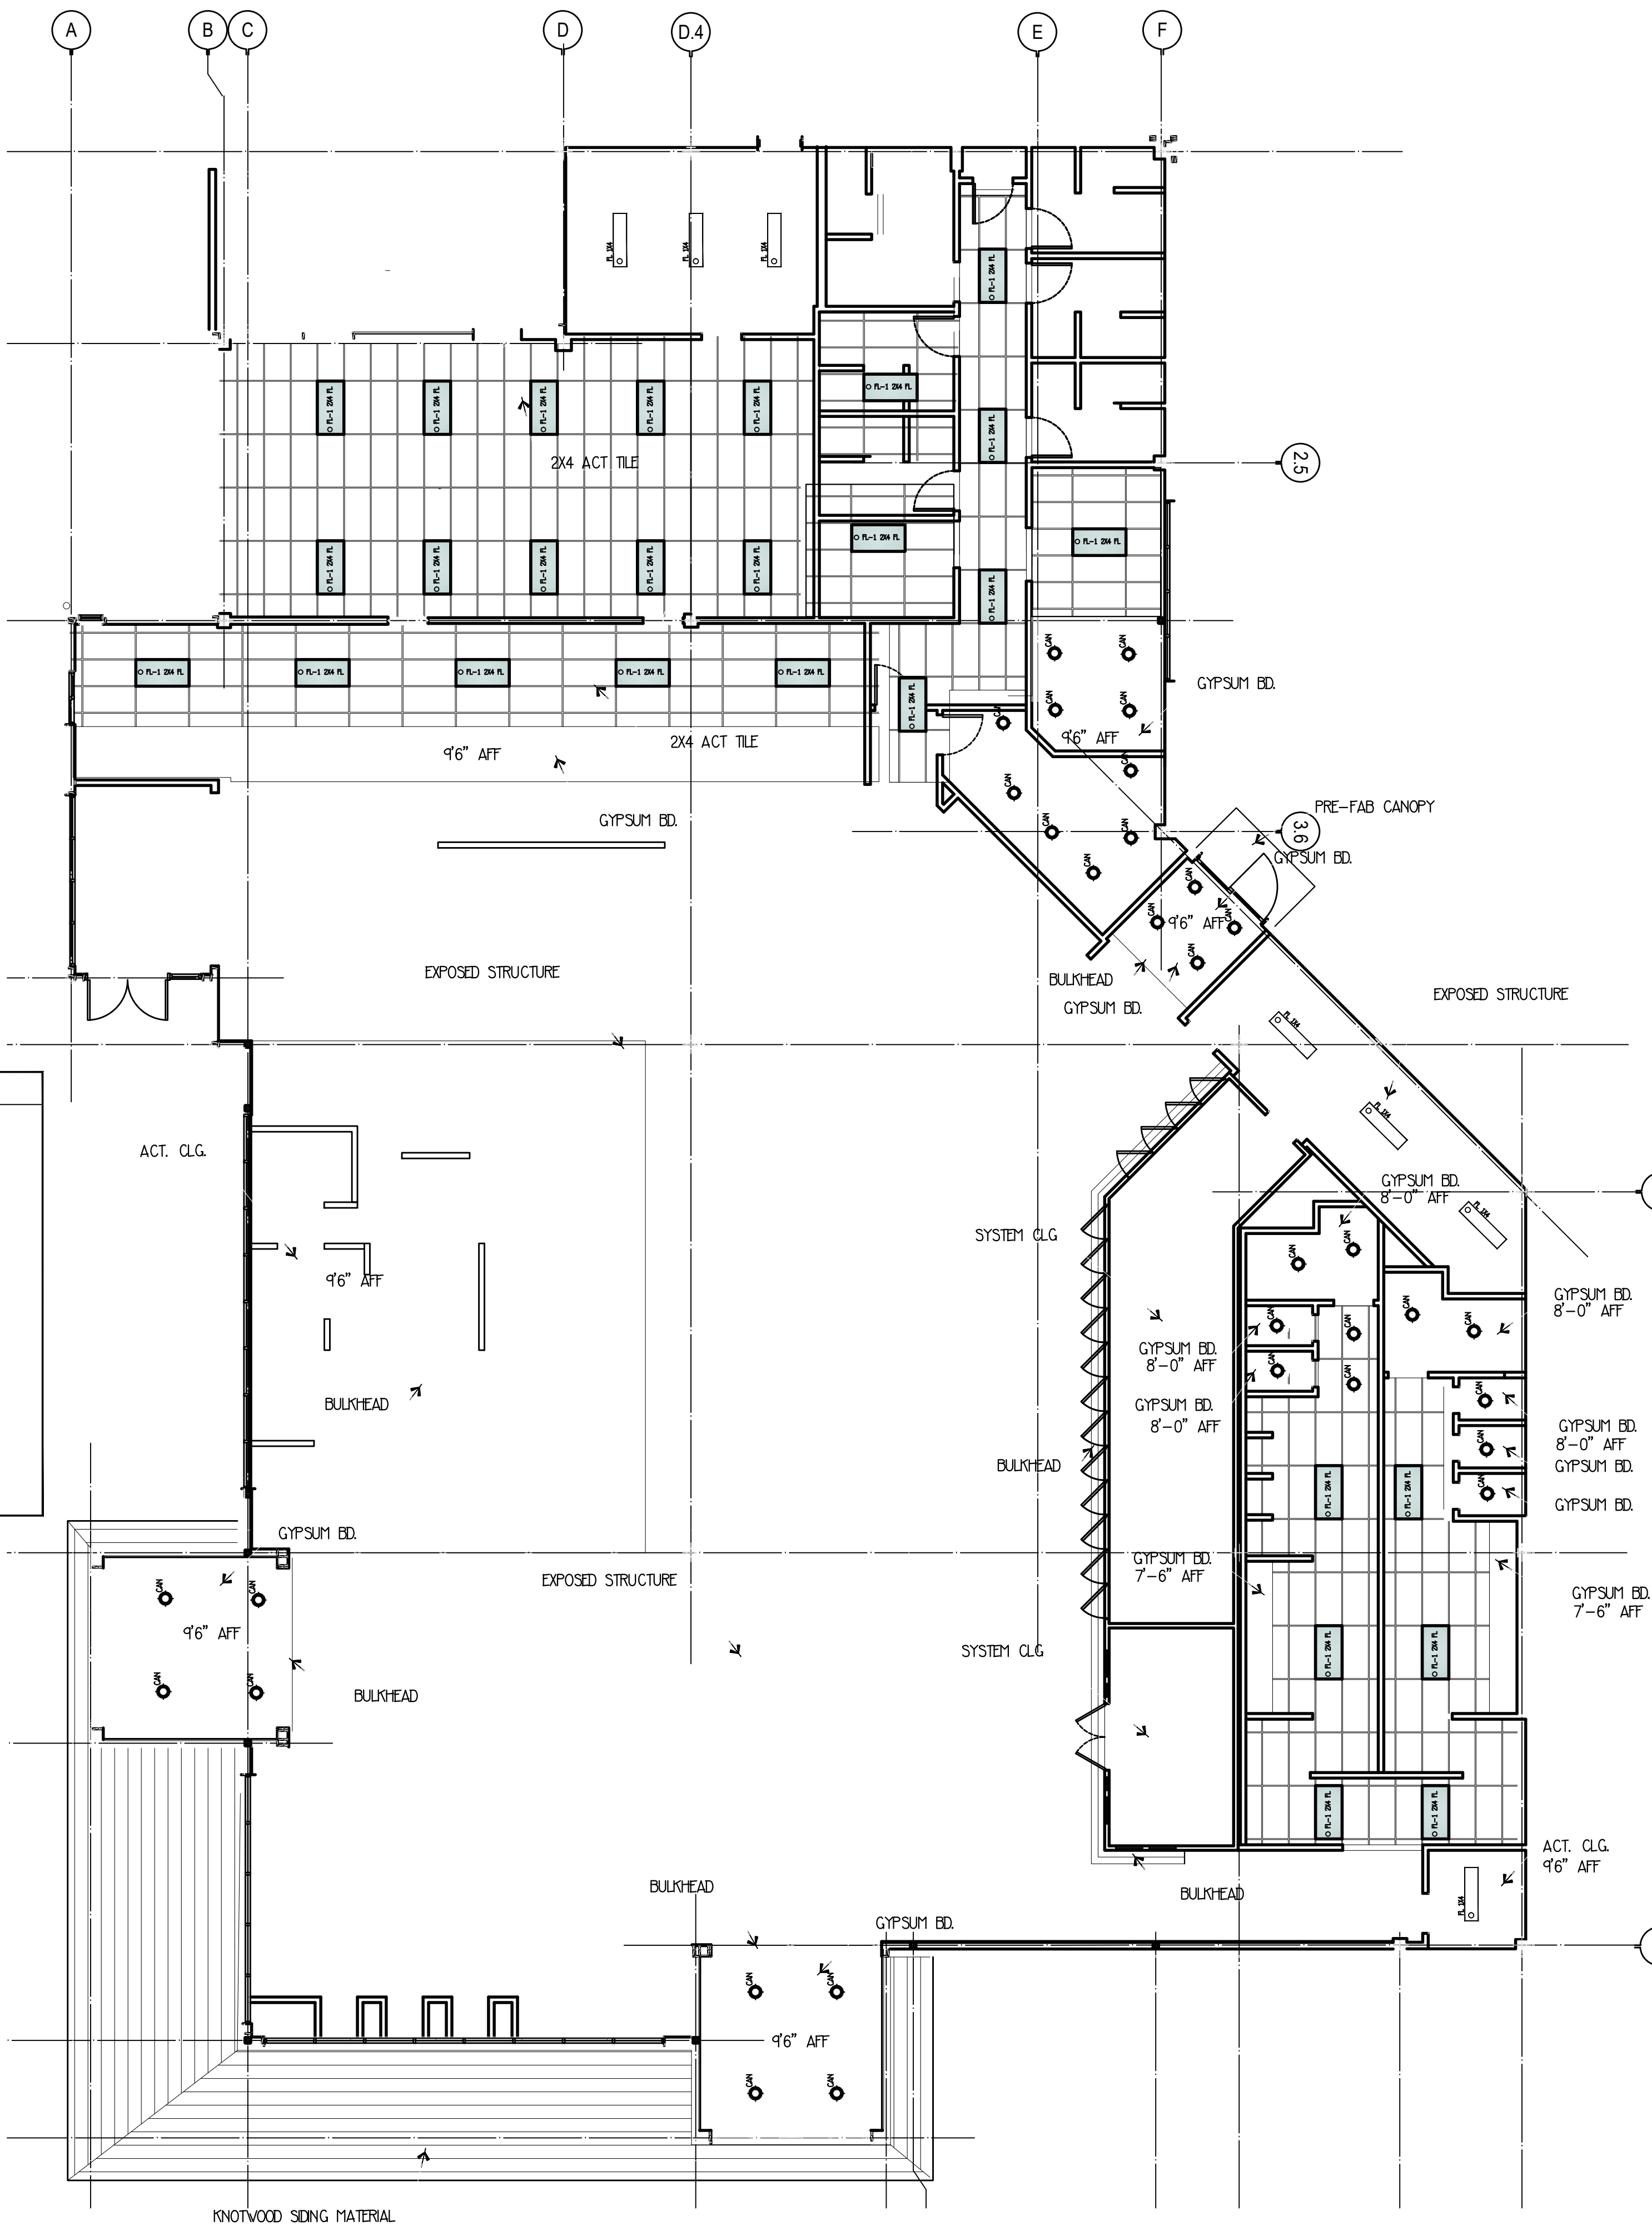



WPK

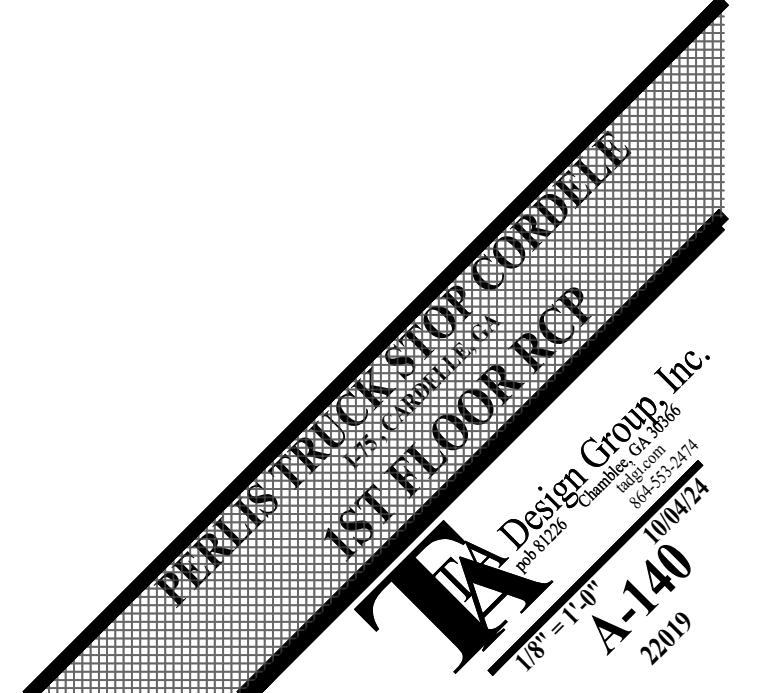

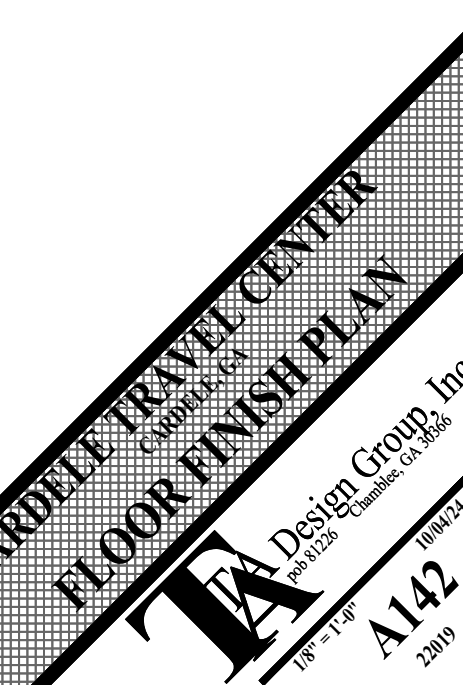





PIPE FLASHING BOOTS

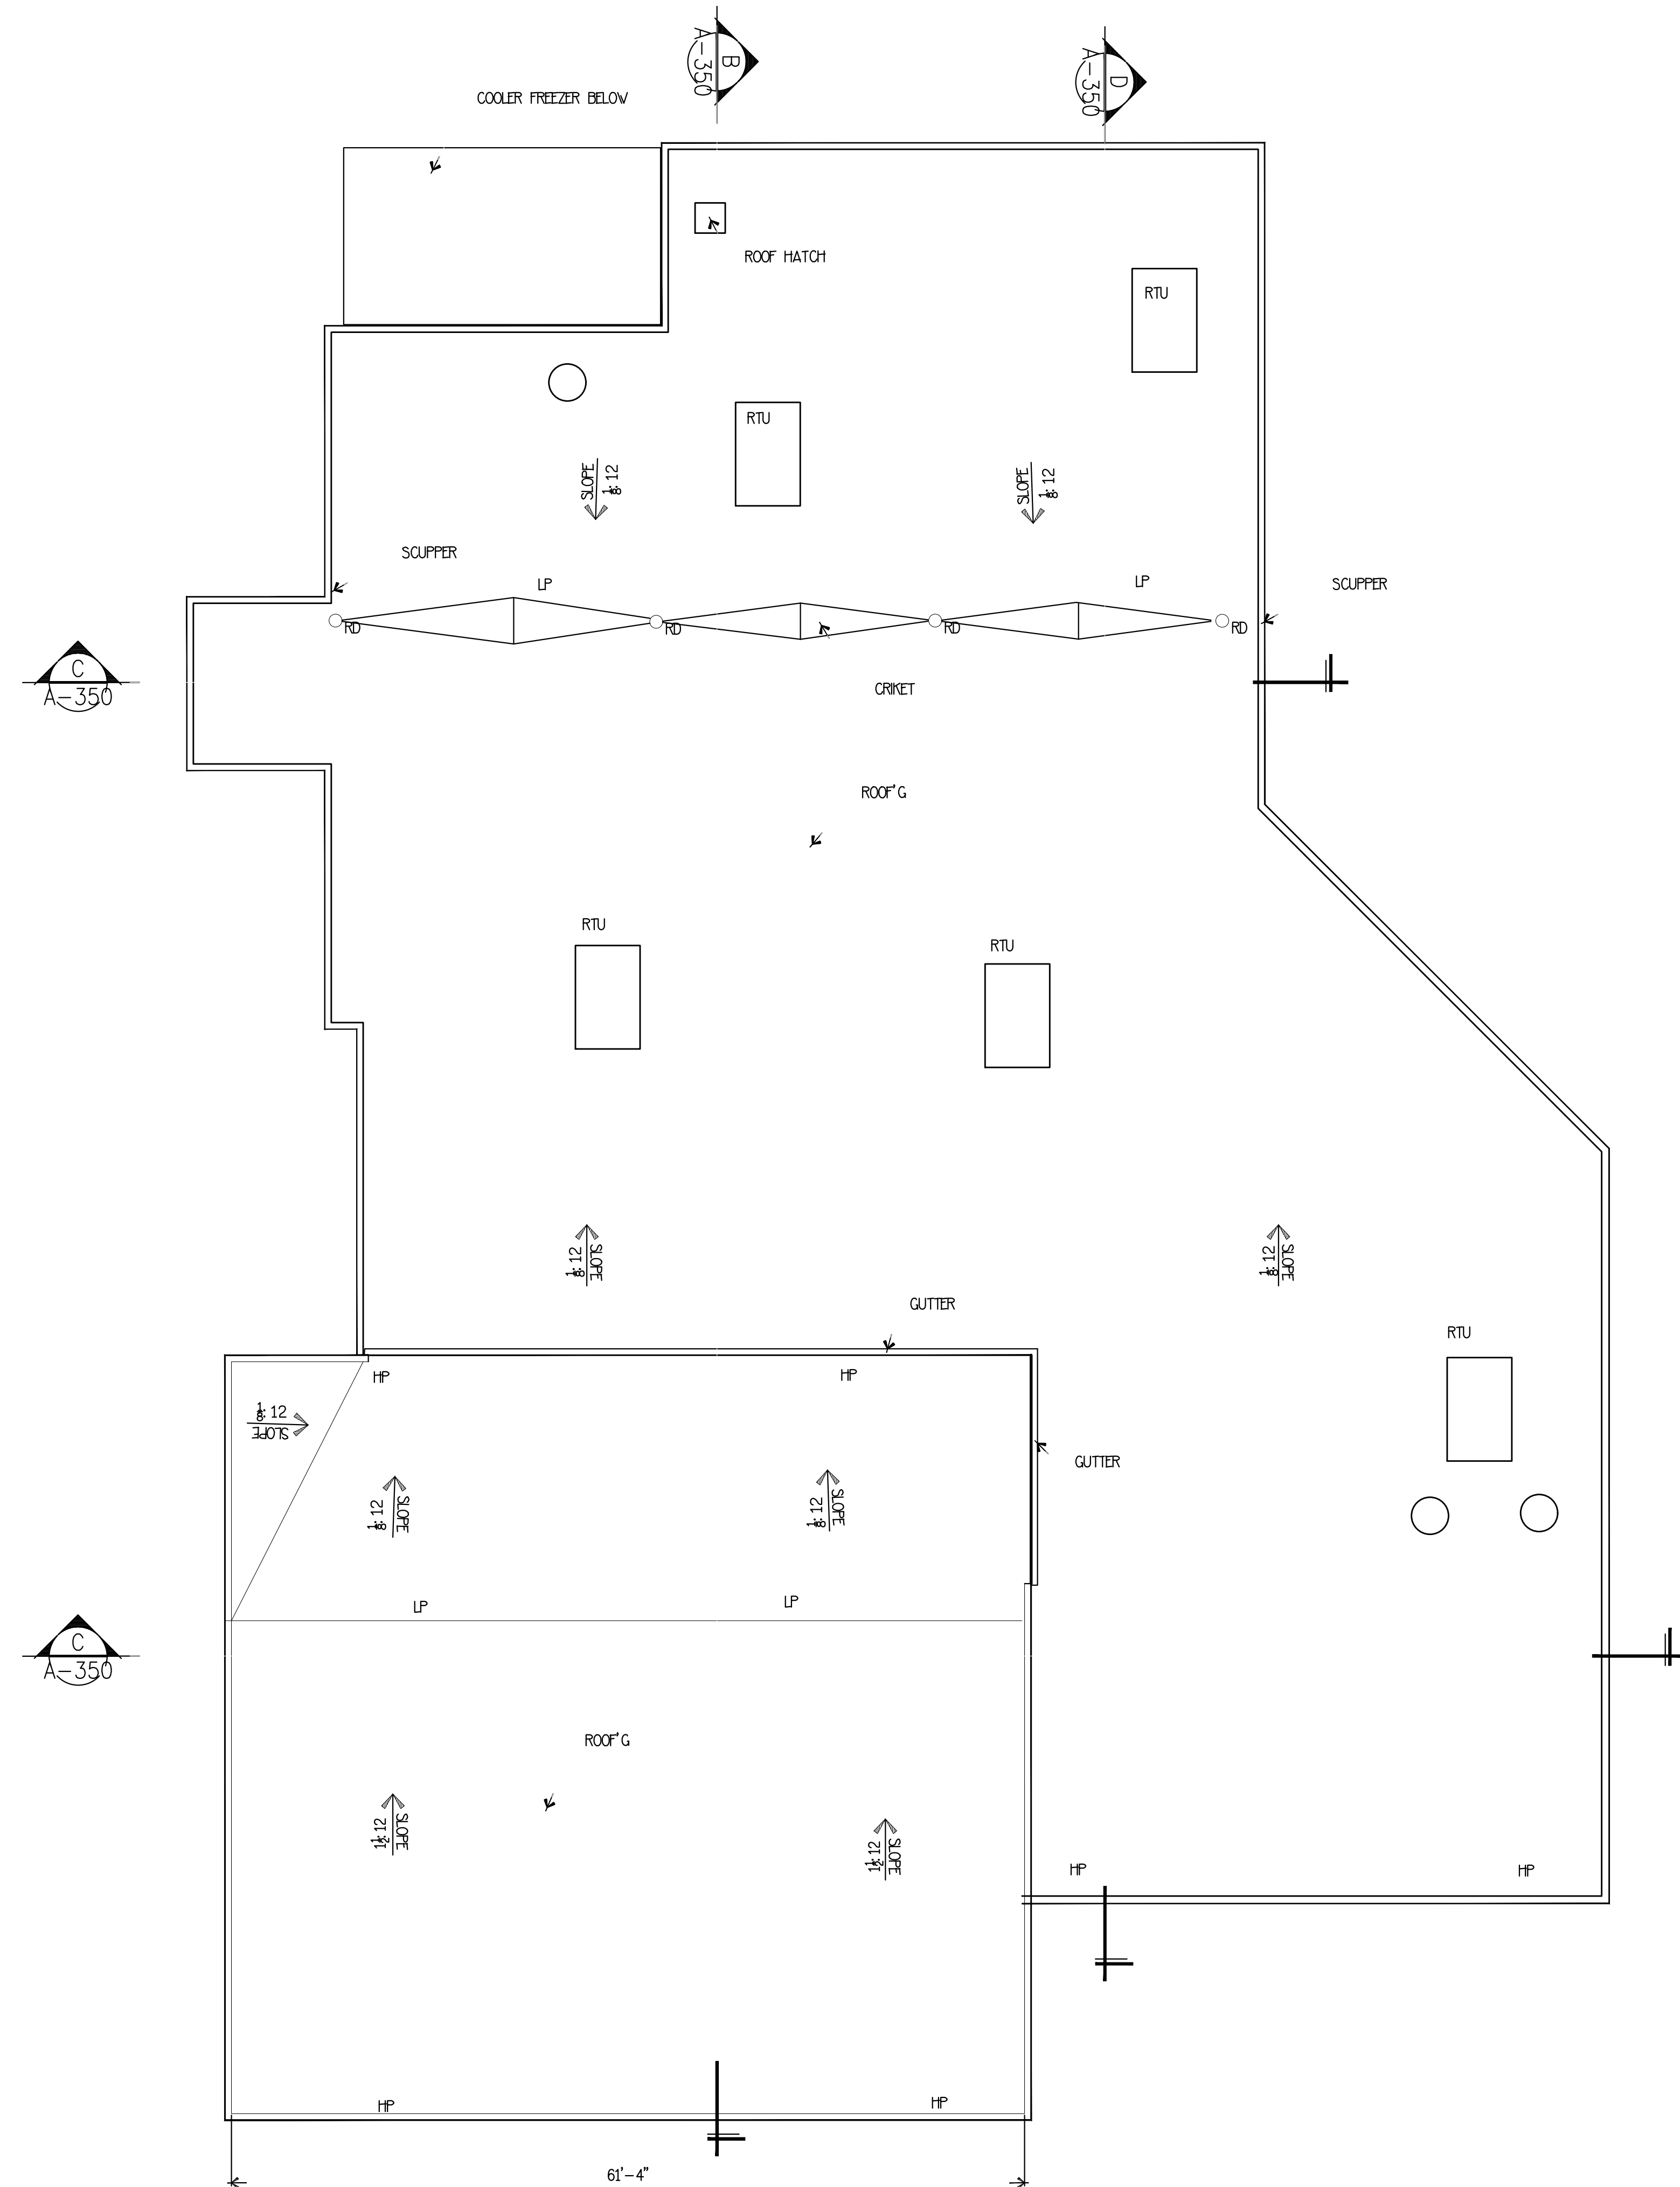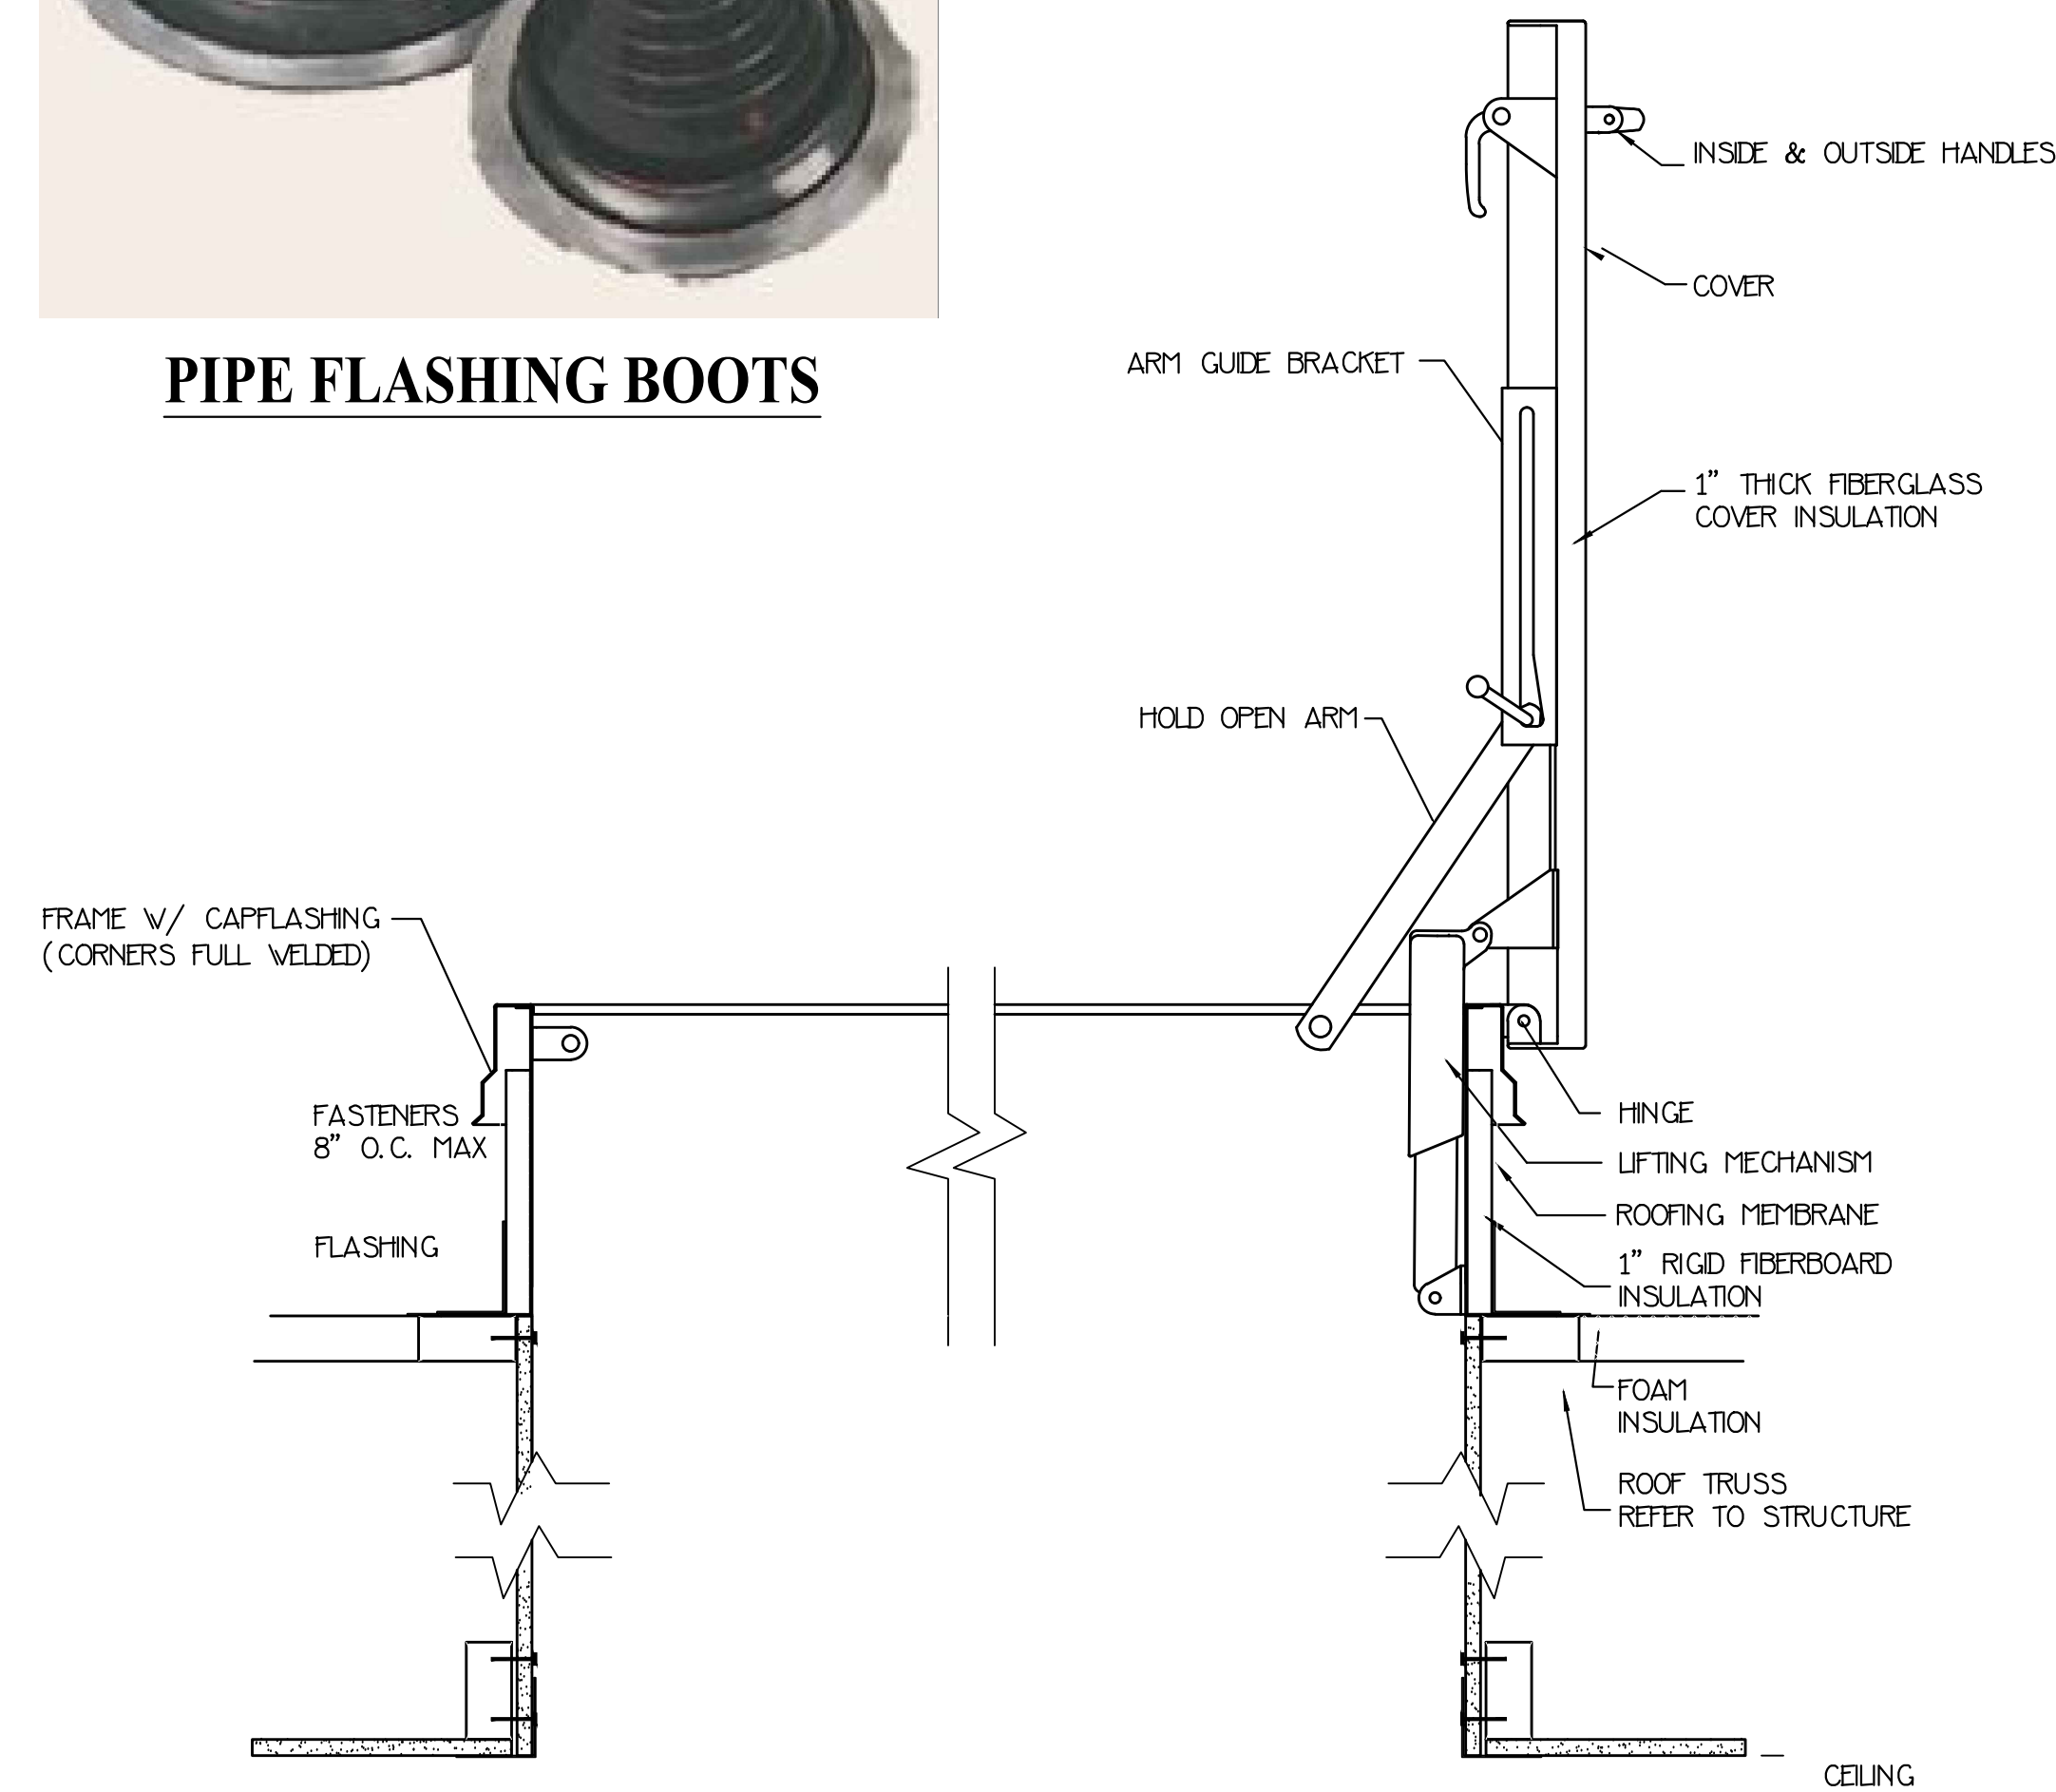

STROUD
AND COMPANY

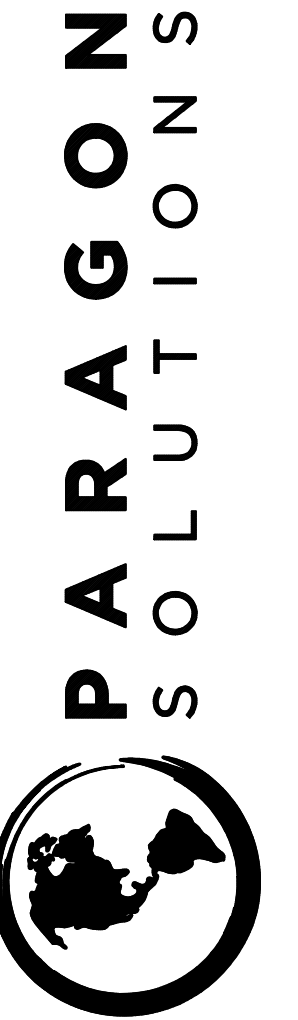

201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-927-7171

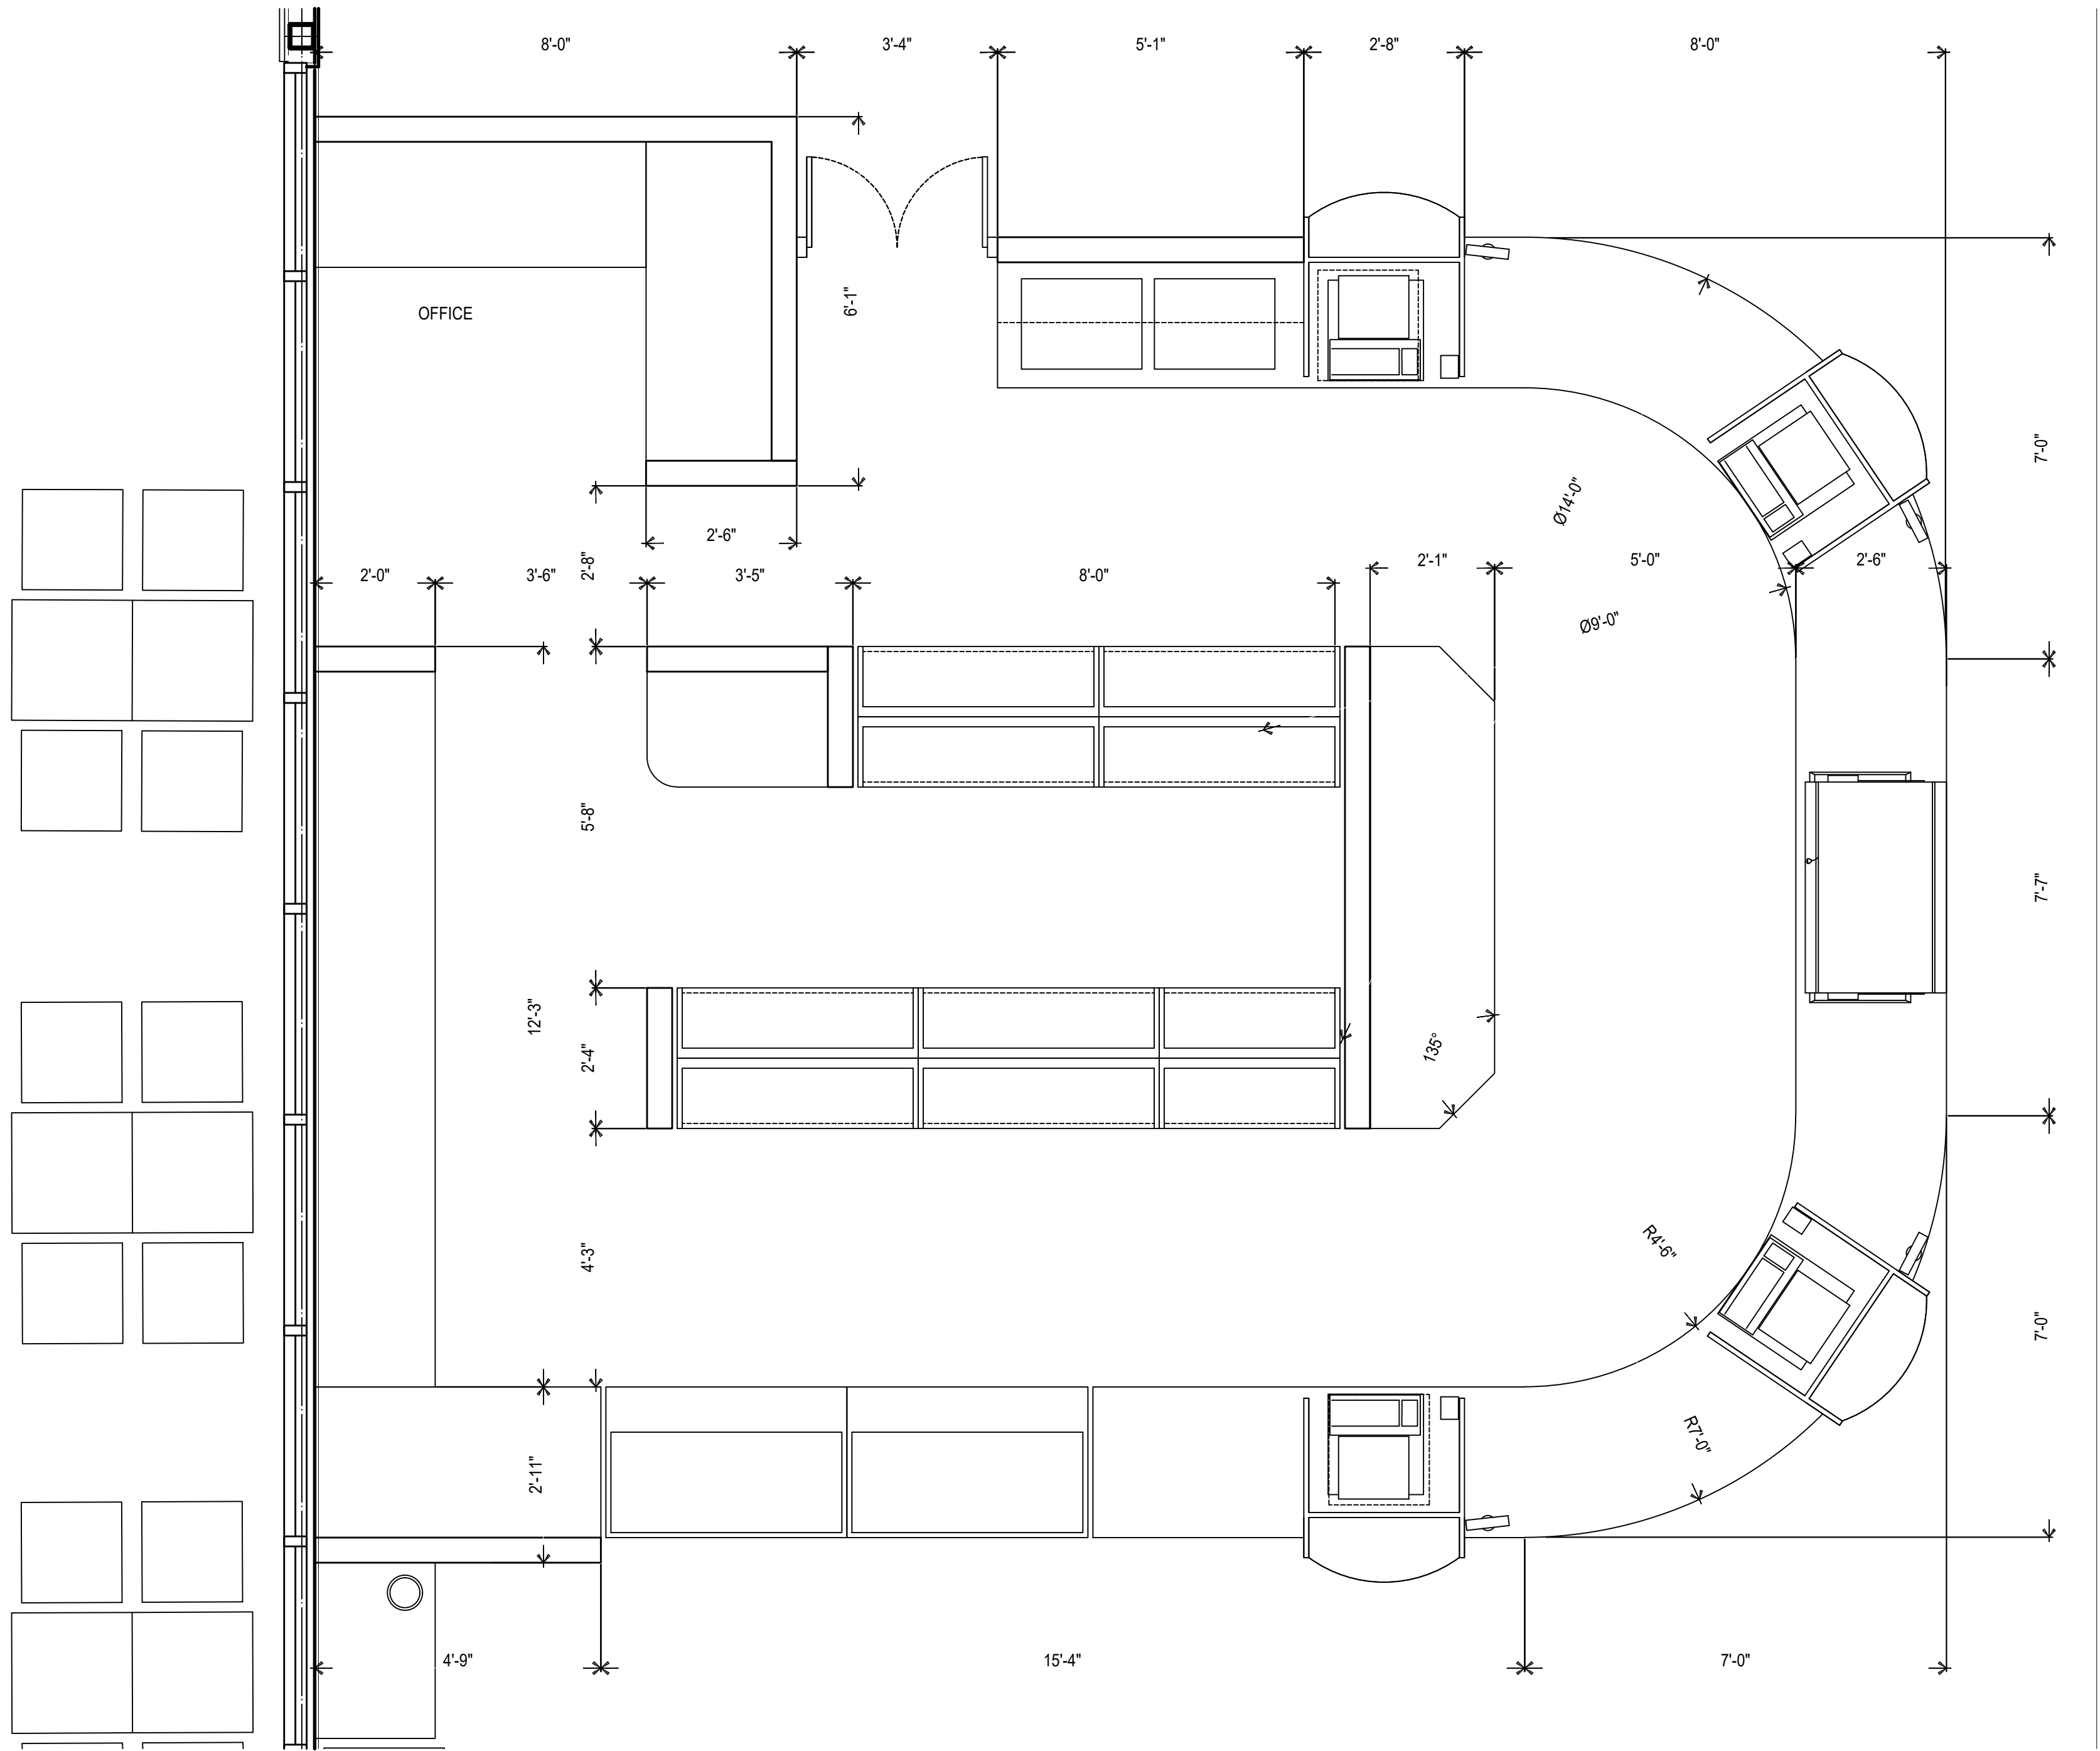






CASHIER PLAN









PARAGON
SOLUTIONS

201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-927-7171

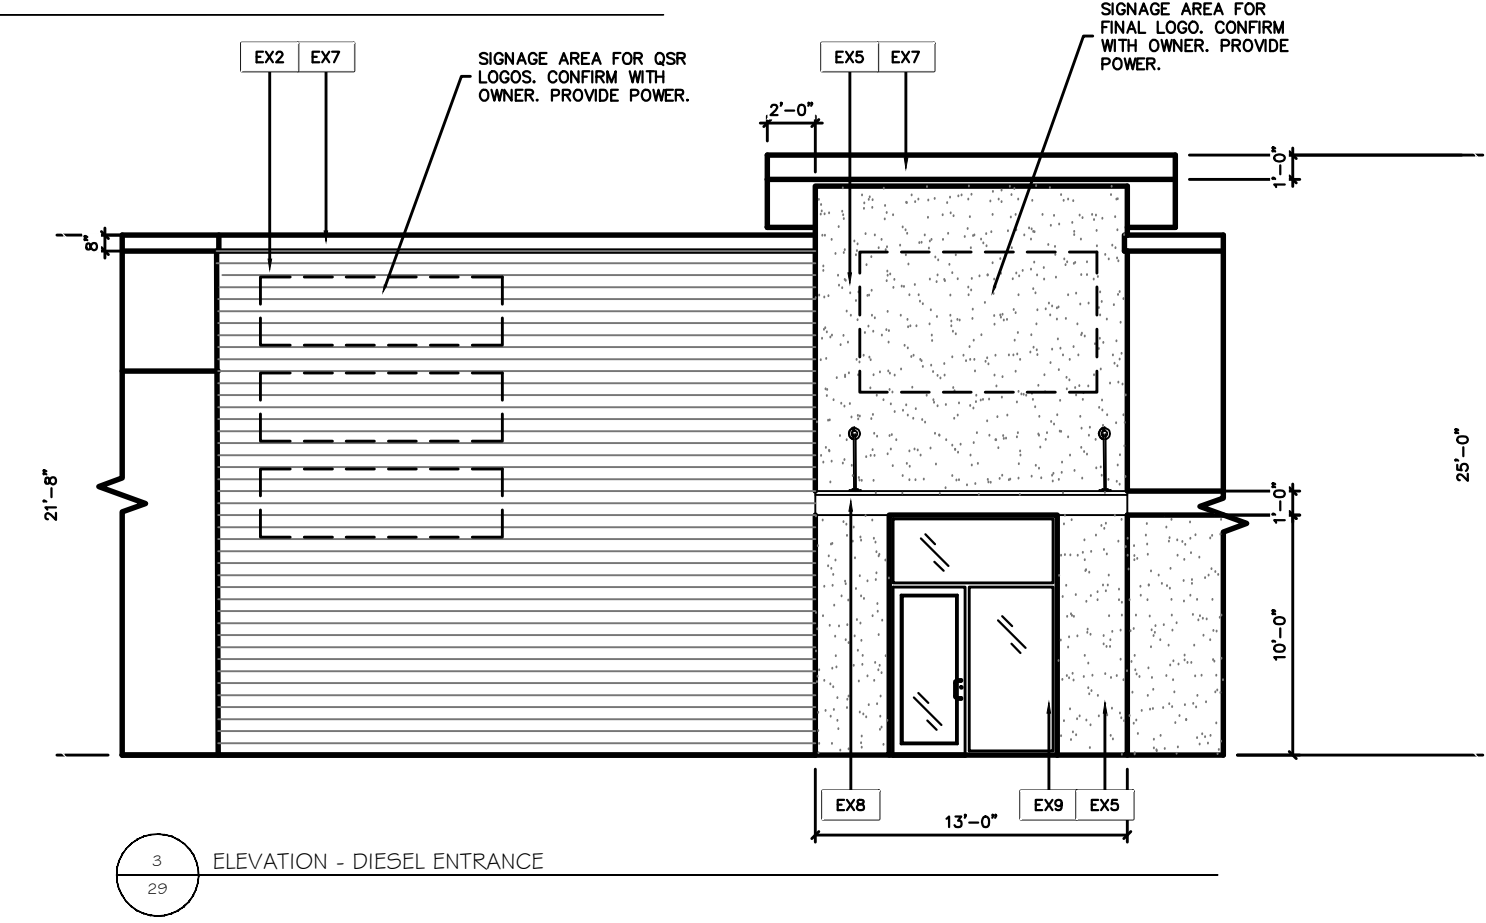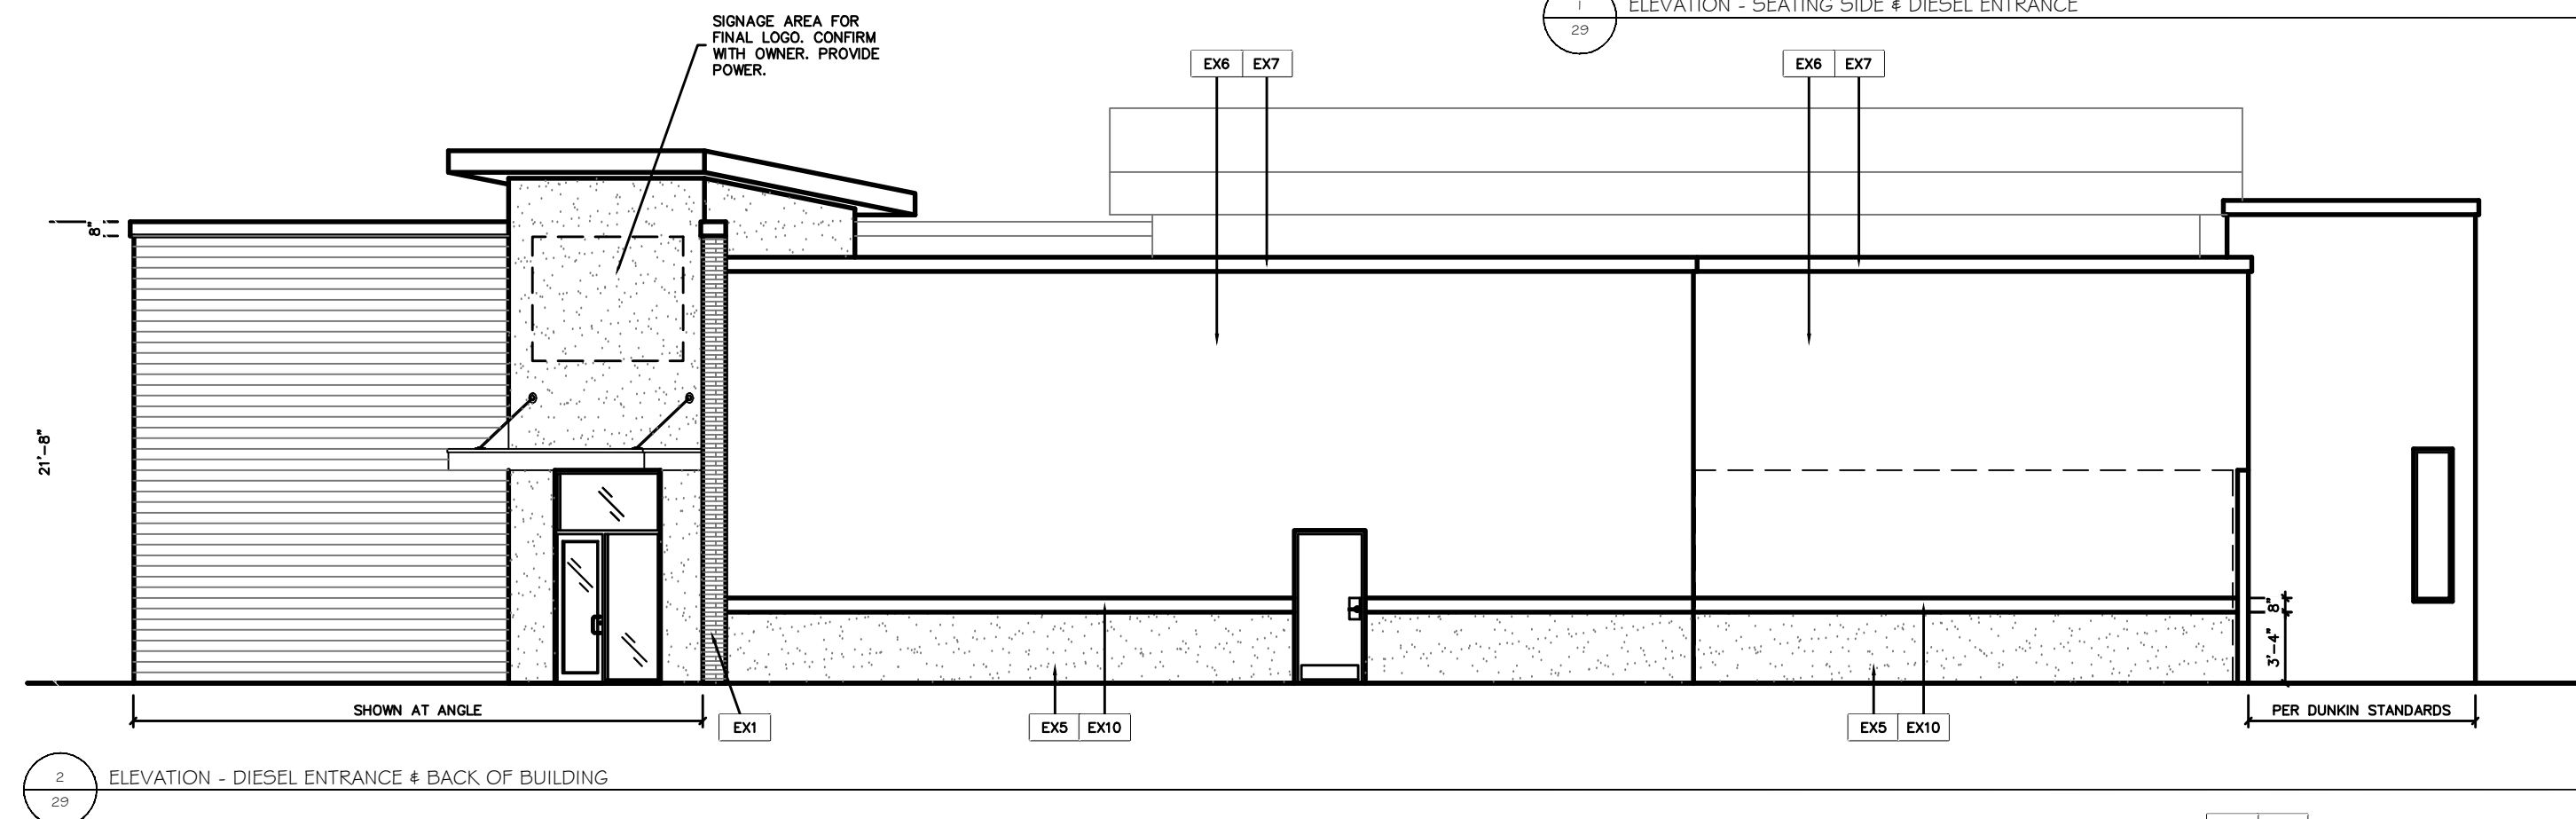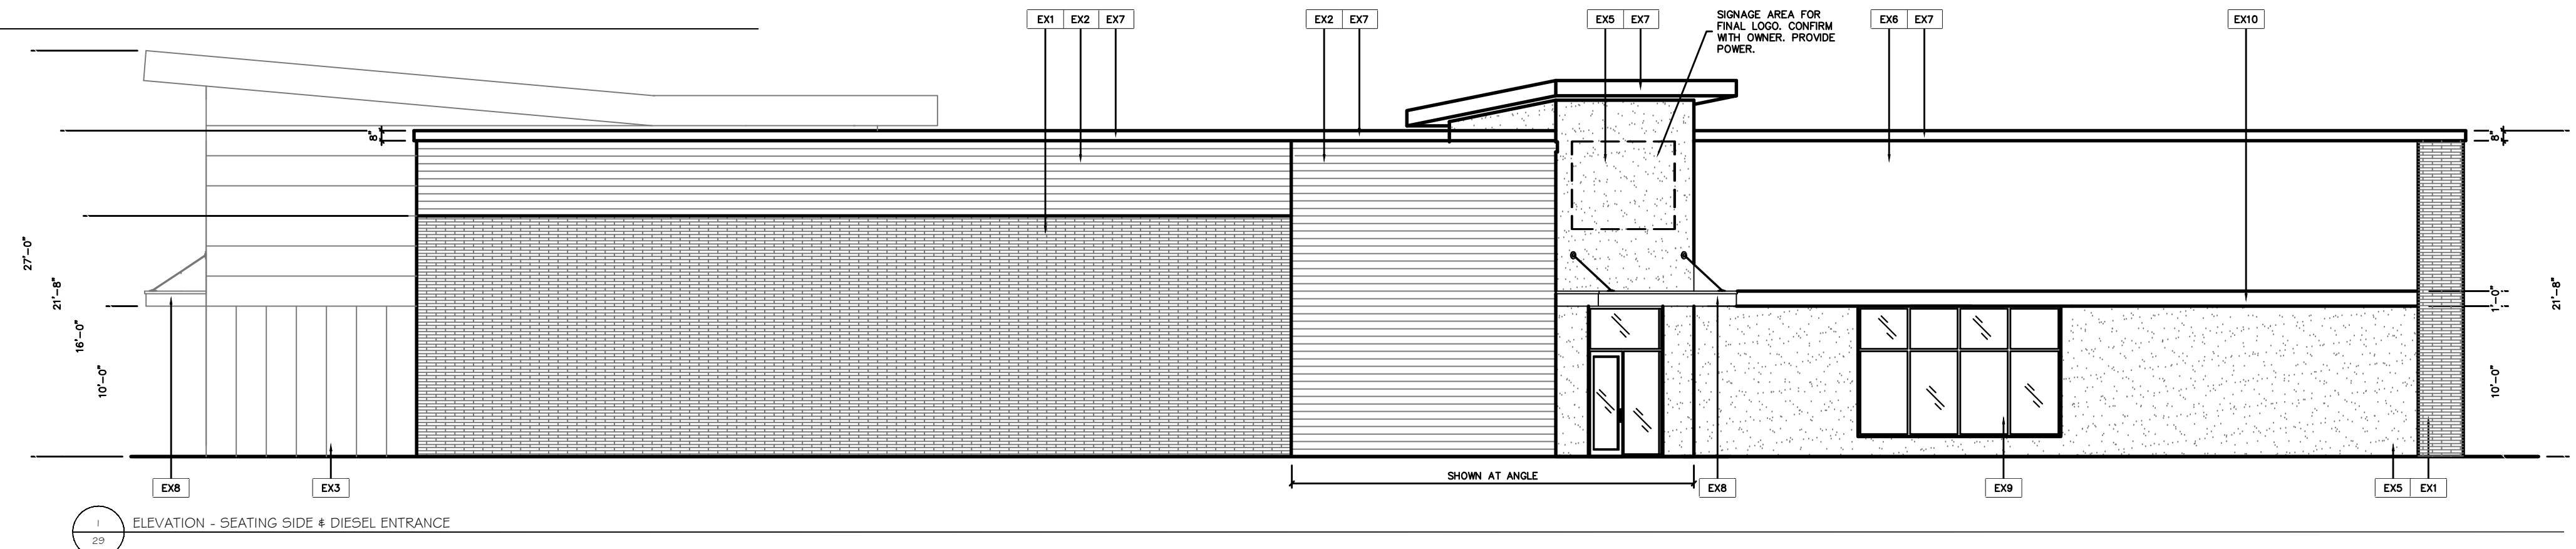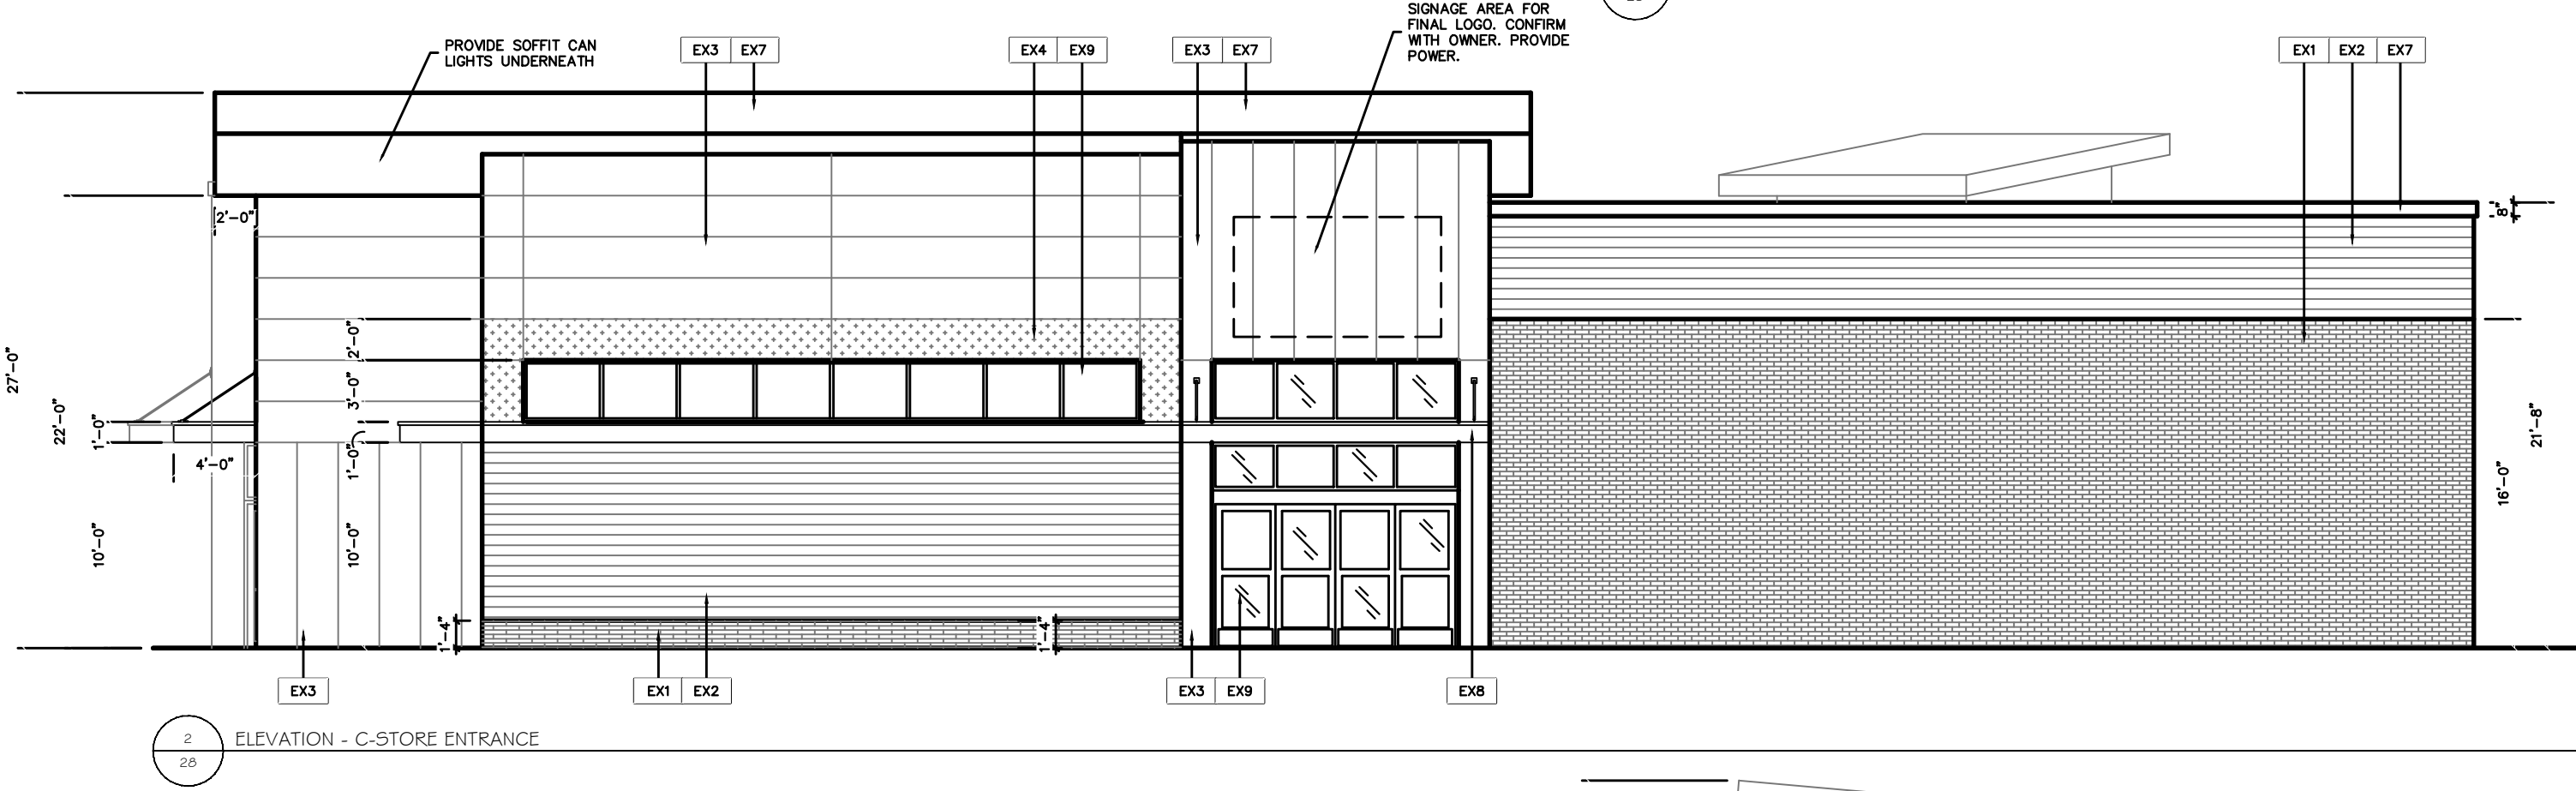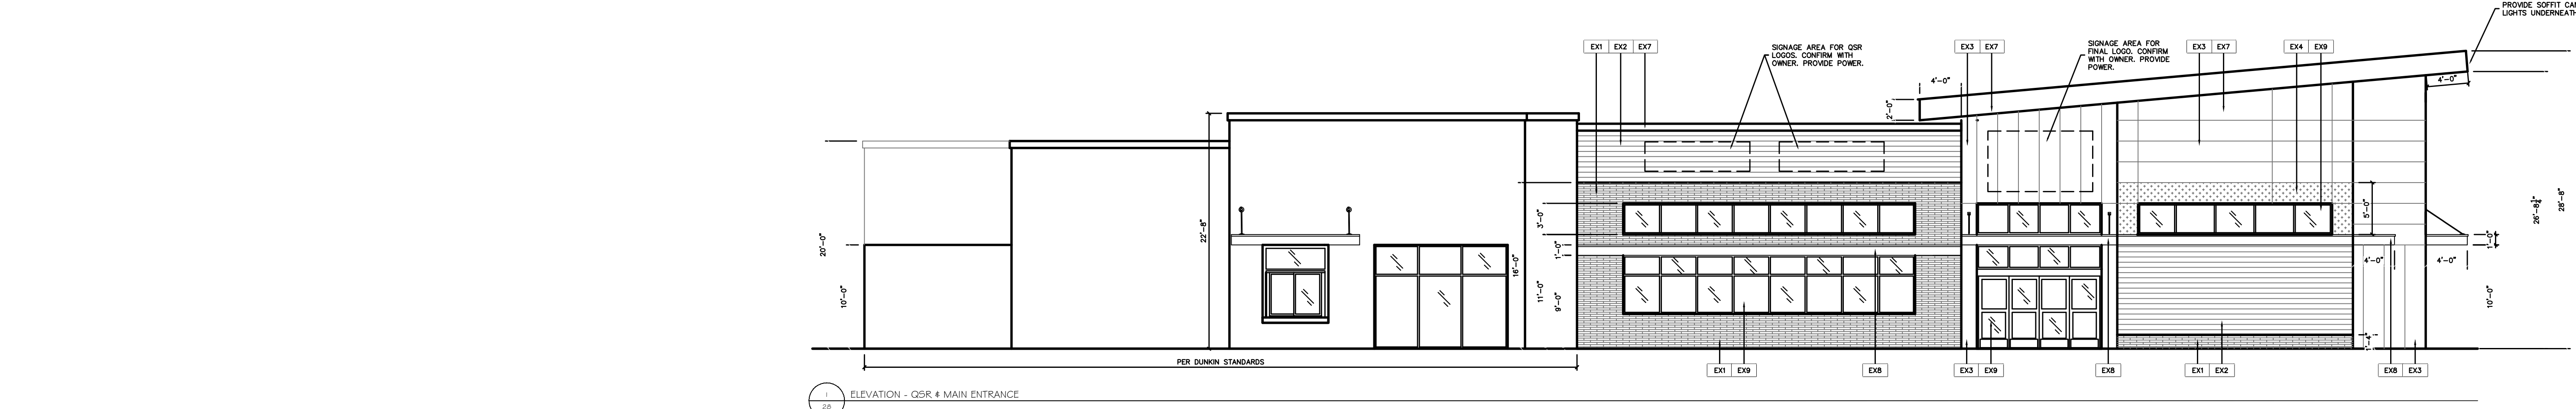

3788 - EXTERIOR FINISH SCHEDULE			
ID	DESCRIPTION	COLOR	MANUFACTURER/CONTACT
EX1	ARCHITECTURAL BRICK VENER (SOLDIER & RUNNING BOND INSTALLATION)	#VOLCANIC BLACK ULTRA PREMIUM IMPERIAL SIZE	KING KLINKER THRU ACME BRICK AMY COOLEY ACOOLEY@BRICK.COM Ø17.332.4101
EX2	WOOD SIMULATED METAL SIDING (6" V-GROOVE PROFILE)	#LIGHT NATIONAL WALNUT	LONGBOARD FACADES MICHELLE TORRES 1.800.604.0343
EX3	ACM PANELS	#CITYSCAPE	PAC-CLAD PETERSEN ALUMINUM (OR COMPARABLE) 800-272-4482
EX4	ACM PANELS	#MATTE BLACK	PAC-CLAD PETERSEN ALUMINUM (OR COMPARABLE) 800-272-4482
EX5	EIFS/STUCCO	COLOR: 131 GULL GRAY / FINISH: LYMESTONE	DRIVIT (OR COMPARABLE) 800-556-7752
EX6	EIFS/STUCCO	COLOR: 102 BRITE WHITE / FINISH: LYMESTONE	DRIVIT (OR COMPARABLE) 800-556-7752
EX7	METAL CAPS/CORNICES	#MATTE BLACK	BRIDGGE MANUFACTURING (OR COMPARABLE) 800-669-0009
EX8	SUPER LUMIDECK FLAT SOFFIT WITH DOWN LIGHTS	CONFIRM COLOR WITH FINAL BRAND / LOGO	MAPES ARCHITECTURAL CANOPIES MAPESCANOPIES.COM
EX9	ALUMINUM STOREFRONT MULLIONS	BLACK ANODIZED ALUMINUM (INSIDE & OUTSIDE)	KAWNEER (OR COMPARABLE) STEVE KESTERSON 214.878.2697
EX10	EXTERIOR GRADE PAINT	TO MATCH (EX3)	SHERWIN WILLIAMS
EX11	SUBSTRATE TO DETERMINE PAINT UV WINDOW TREATMENTS (IF NEEDED)		ASHLYNN BOURQUE 214.553.3844 CONSULT CONTRACTOR OR ARCHITECT
EXTERIOR FINISH GENERAL NOTES			
1. CONSULT LOCAL CONTRACTOR FOR STANDARD MATERIALS.			
2. CONSULT PARAGON SOLUTIONS FOR COLOR VERIFICATIONS AND GRAPHICS.			
3. MATERIALS MAY NOT BE SUBSTITUTED WITHOUT PERMISSIONS FROM OWNER OR PARAGON SOLUTIONS.			
4. FIELD VERIFY ALL EXTERIOR ELEVATIONS AND GRAPHICS FOR ACCURATE DIMENSIONS.			

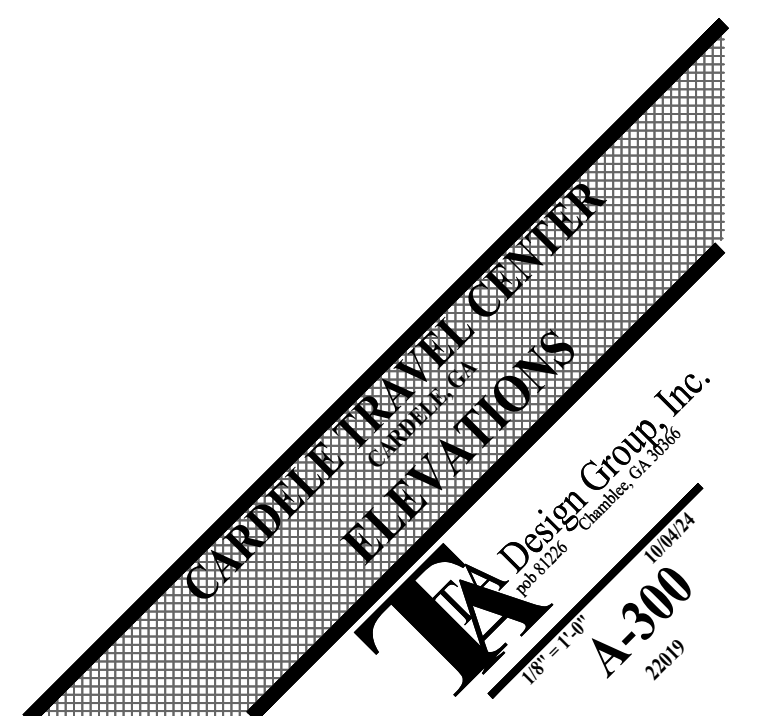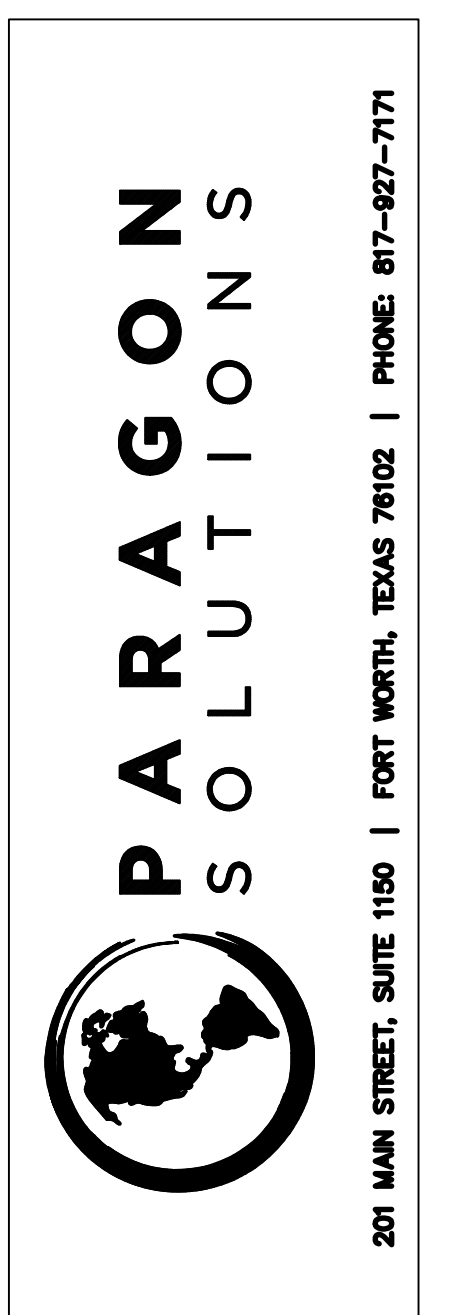

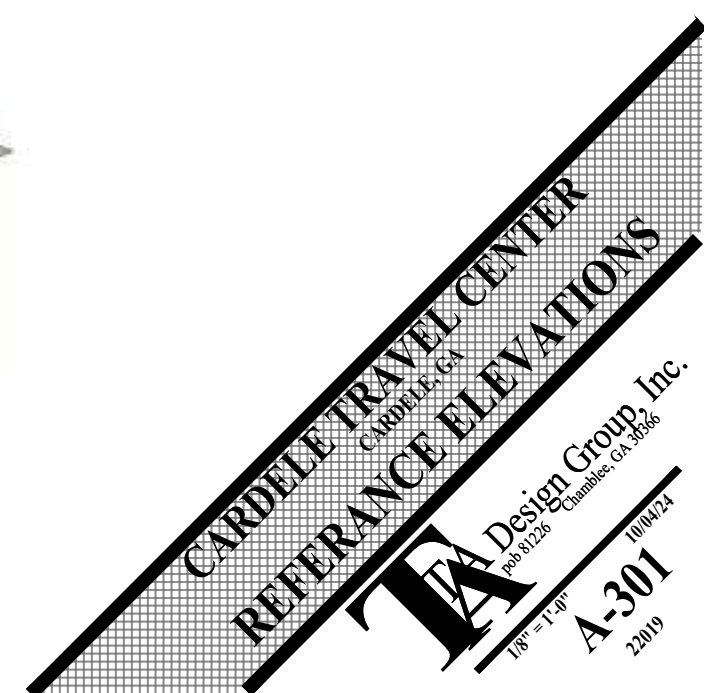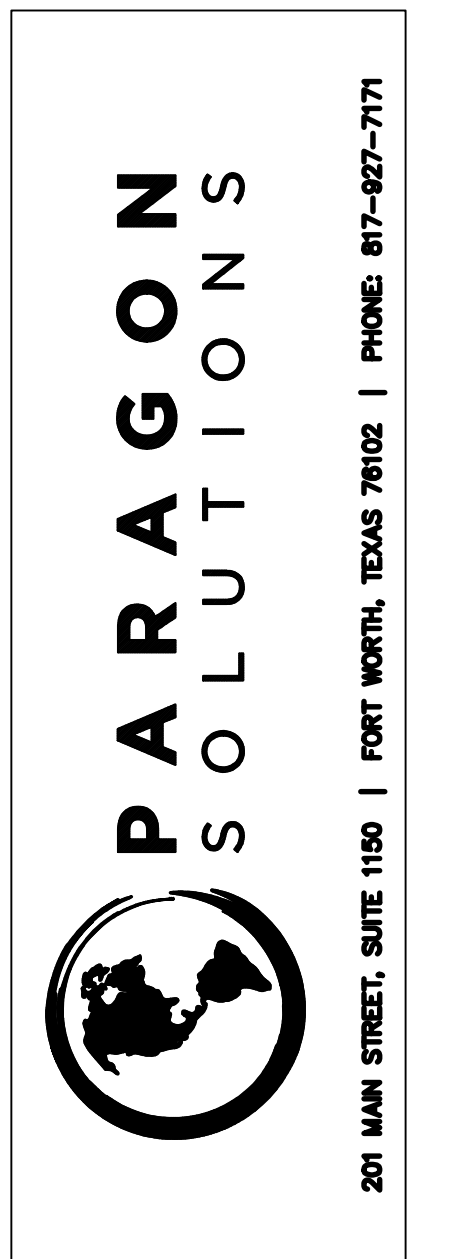



FRONT WALL / HALLWAY TO TENANT



FROZEN DRINKS

ENTRANCE

CASHIER



STROUD
AND COMPANY



ENTRANCE

TEA

FOUNTAIN



SMOKE SHOP COUNTER



DIESEL COUNTER

P
A
R
A
G
O
N
S
O
L
U
T
I
O
N
S




201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-827-7171



TO SHOWERS & LOUNGE

PRO DRIVER MERCH


DIESEL ENTRANCE

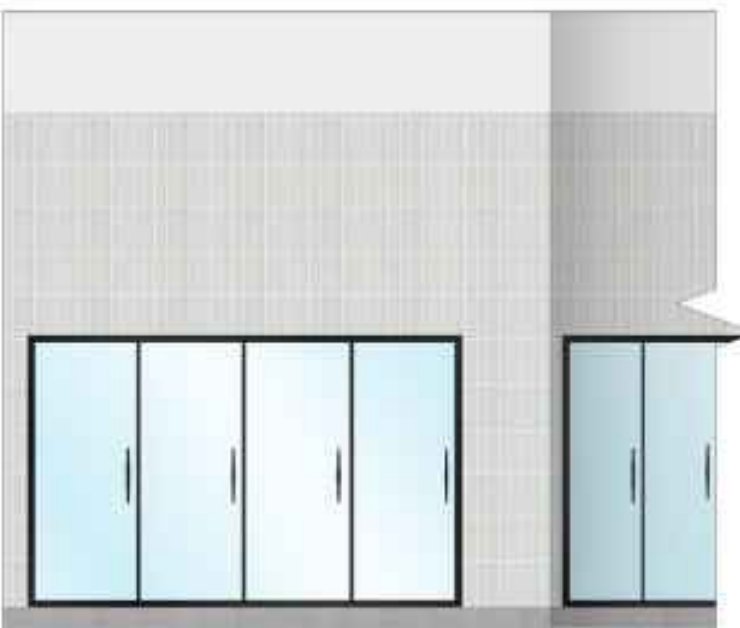

COOLERS




BEER CAVE INTERIOR

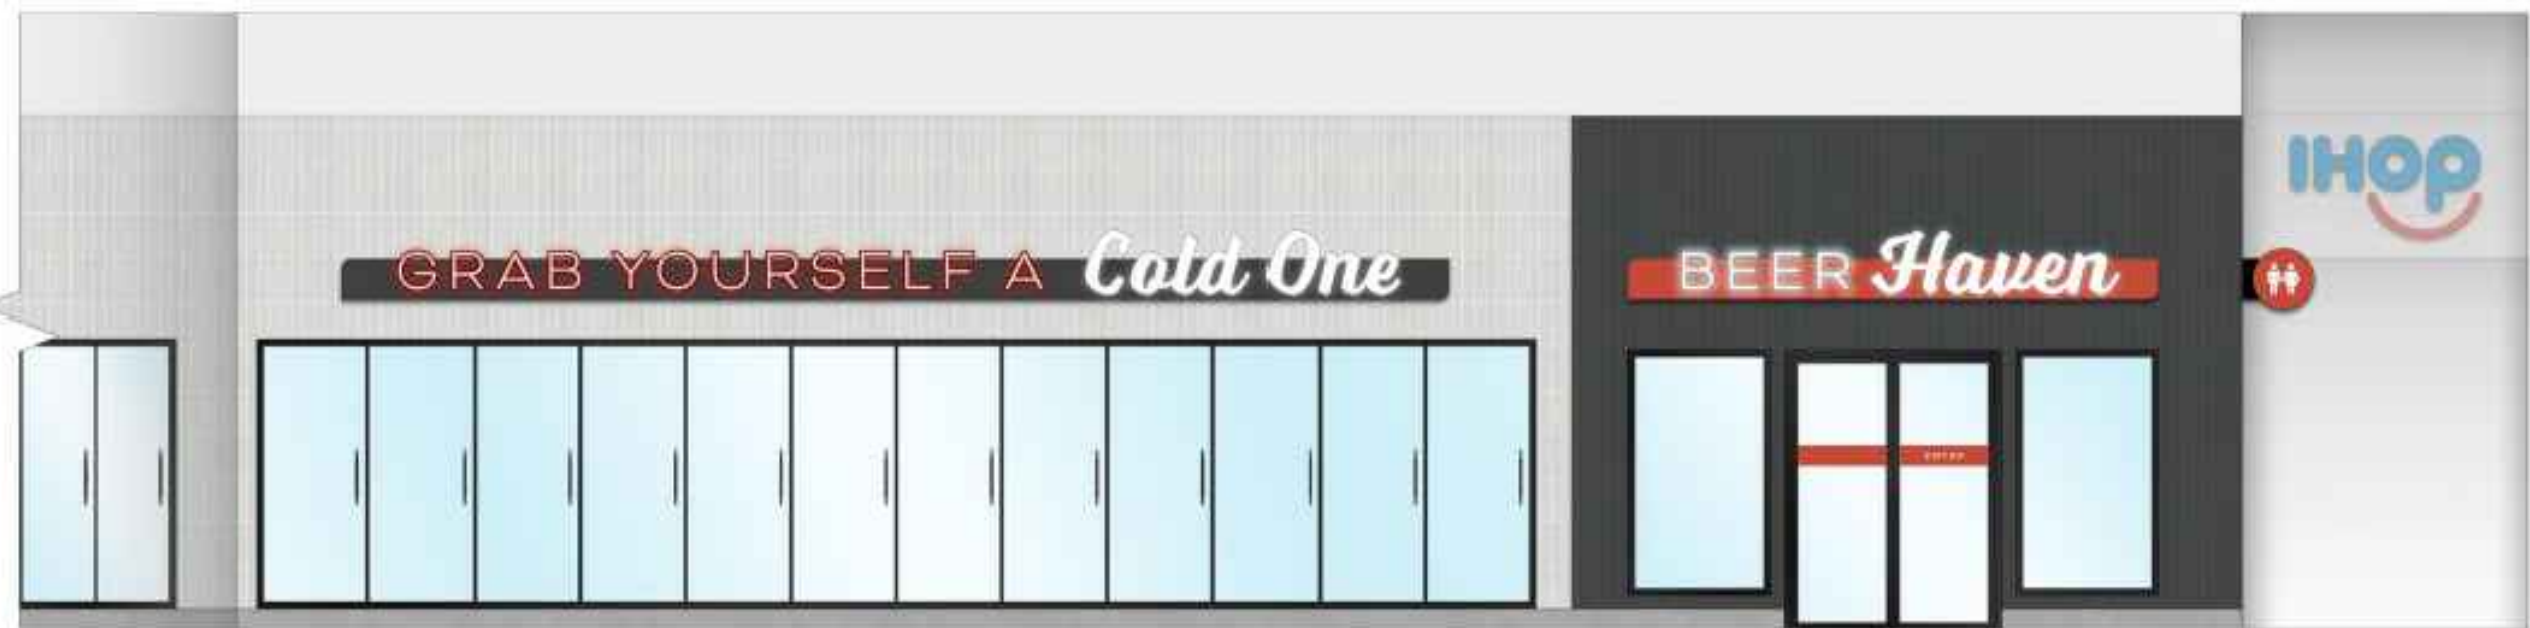

COOLERS

BEER CAVE

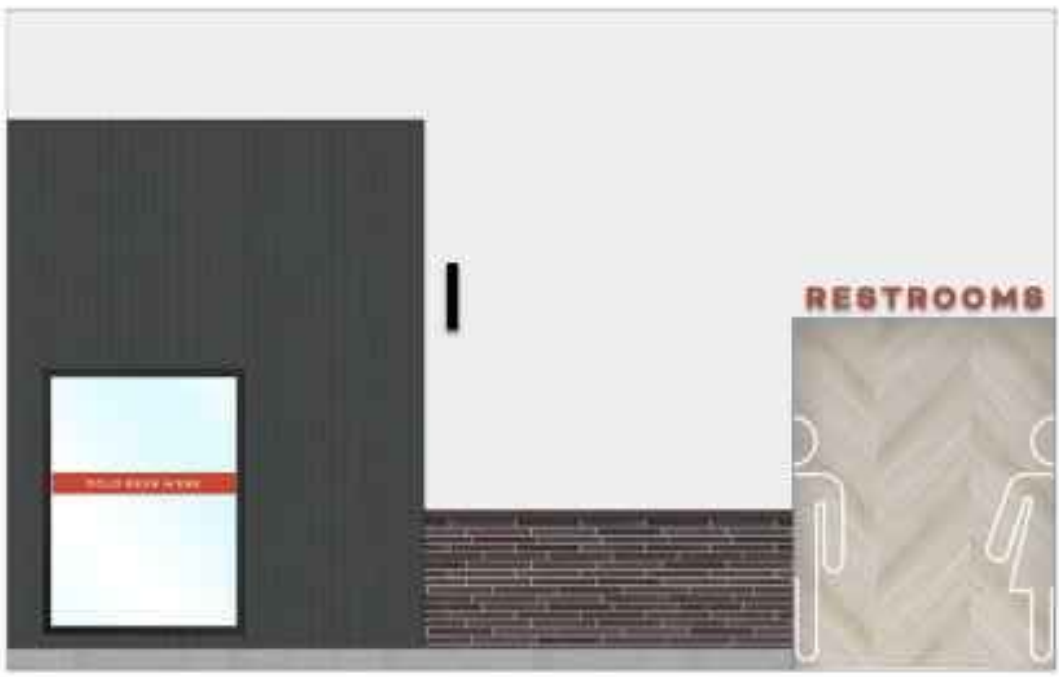

TO RESTROOMS



CARDILE TRAVEL CENTER
INT REFERENCE ELEVATIONS

Design Group, Inc.
A-310
2019



GRAB & GO



CRAFT BEER




MEN'S

WOMEN'S



WOMEN'S RESTROOM

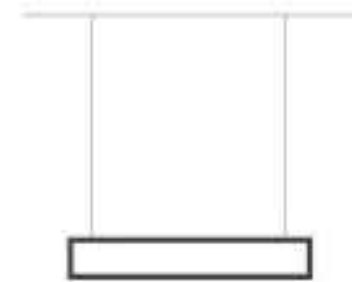

COFFEE ISLAND



MEN'S RESTROOM



TYPICAL ADA STALL



STROUD
AND COMPANY

P A R A G O N
S O L U T I O N S

201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-827-7171




LOUNGE ENTRANCE



GAMING ENTRANCE



TO LAUNDRY

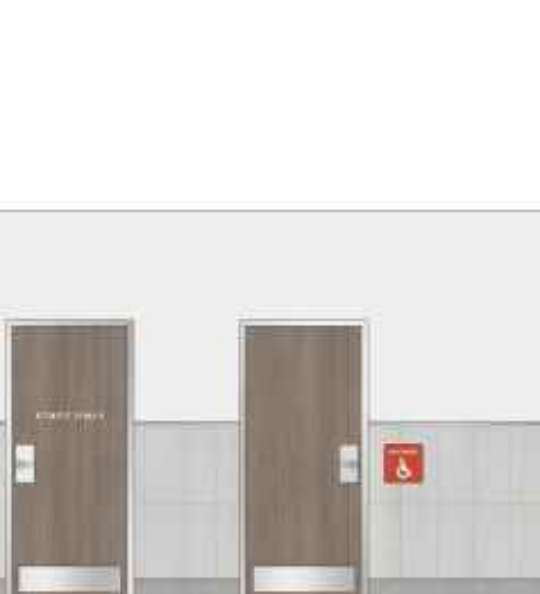


SHOWER HALLWAY



SHOWER HALLWAY



DRIVER LOUNGE

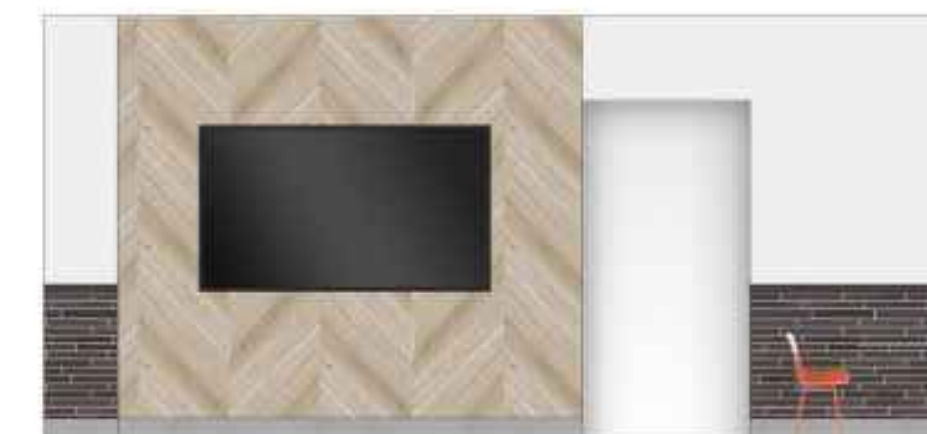

TO HALLWAY



SHOWER HALLWAY


TO LOUNGE



TYPICAL SHOWER



LAUNDRY

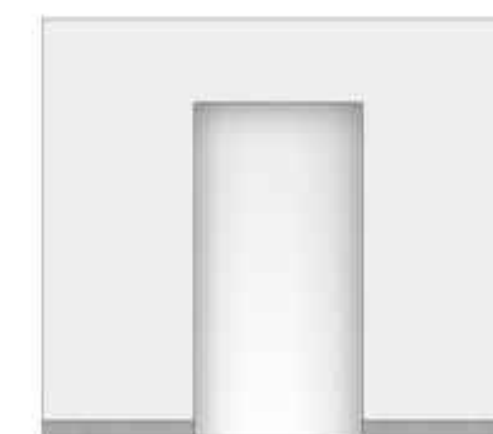

TO HALLWAY




LAUNDRY




GAMING ROOM



TO STORE

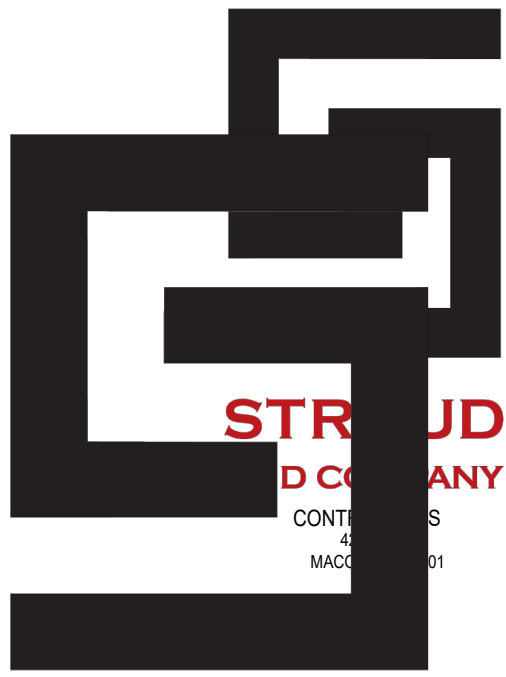


**STROUD
AND COMPANY**

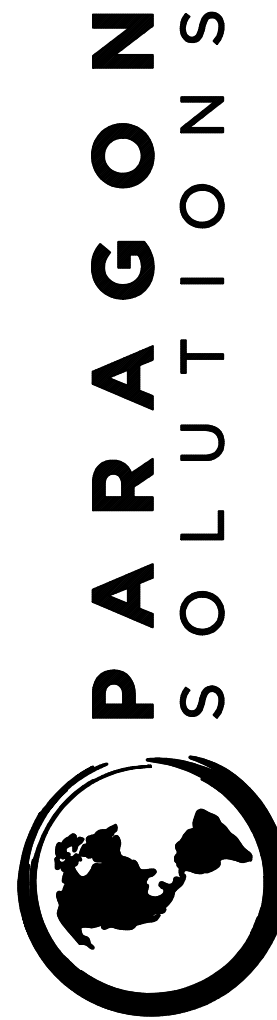


201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-927-7171

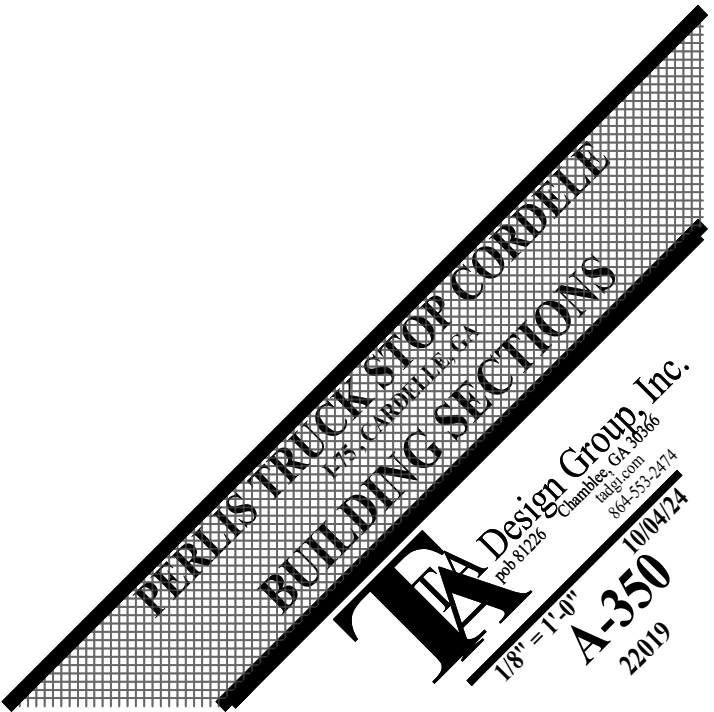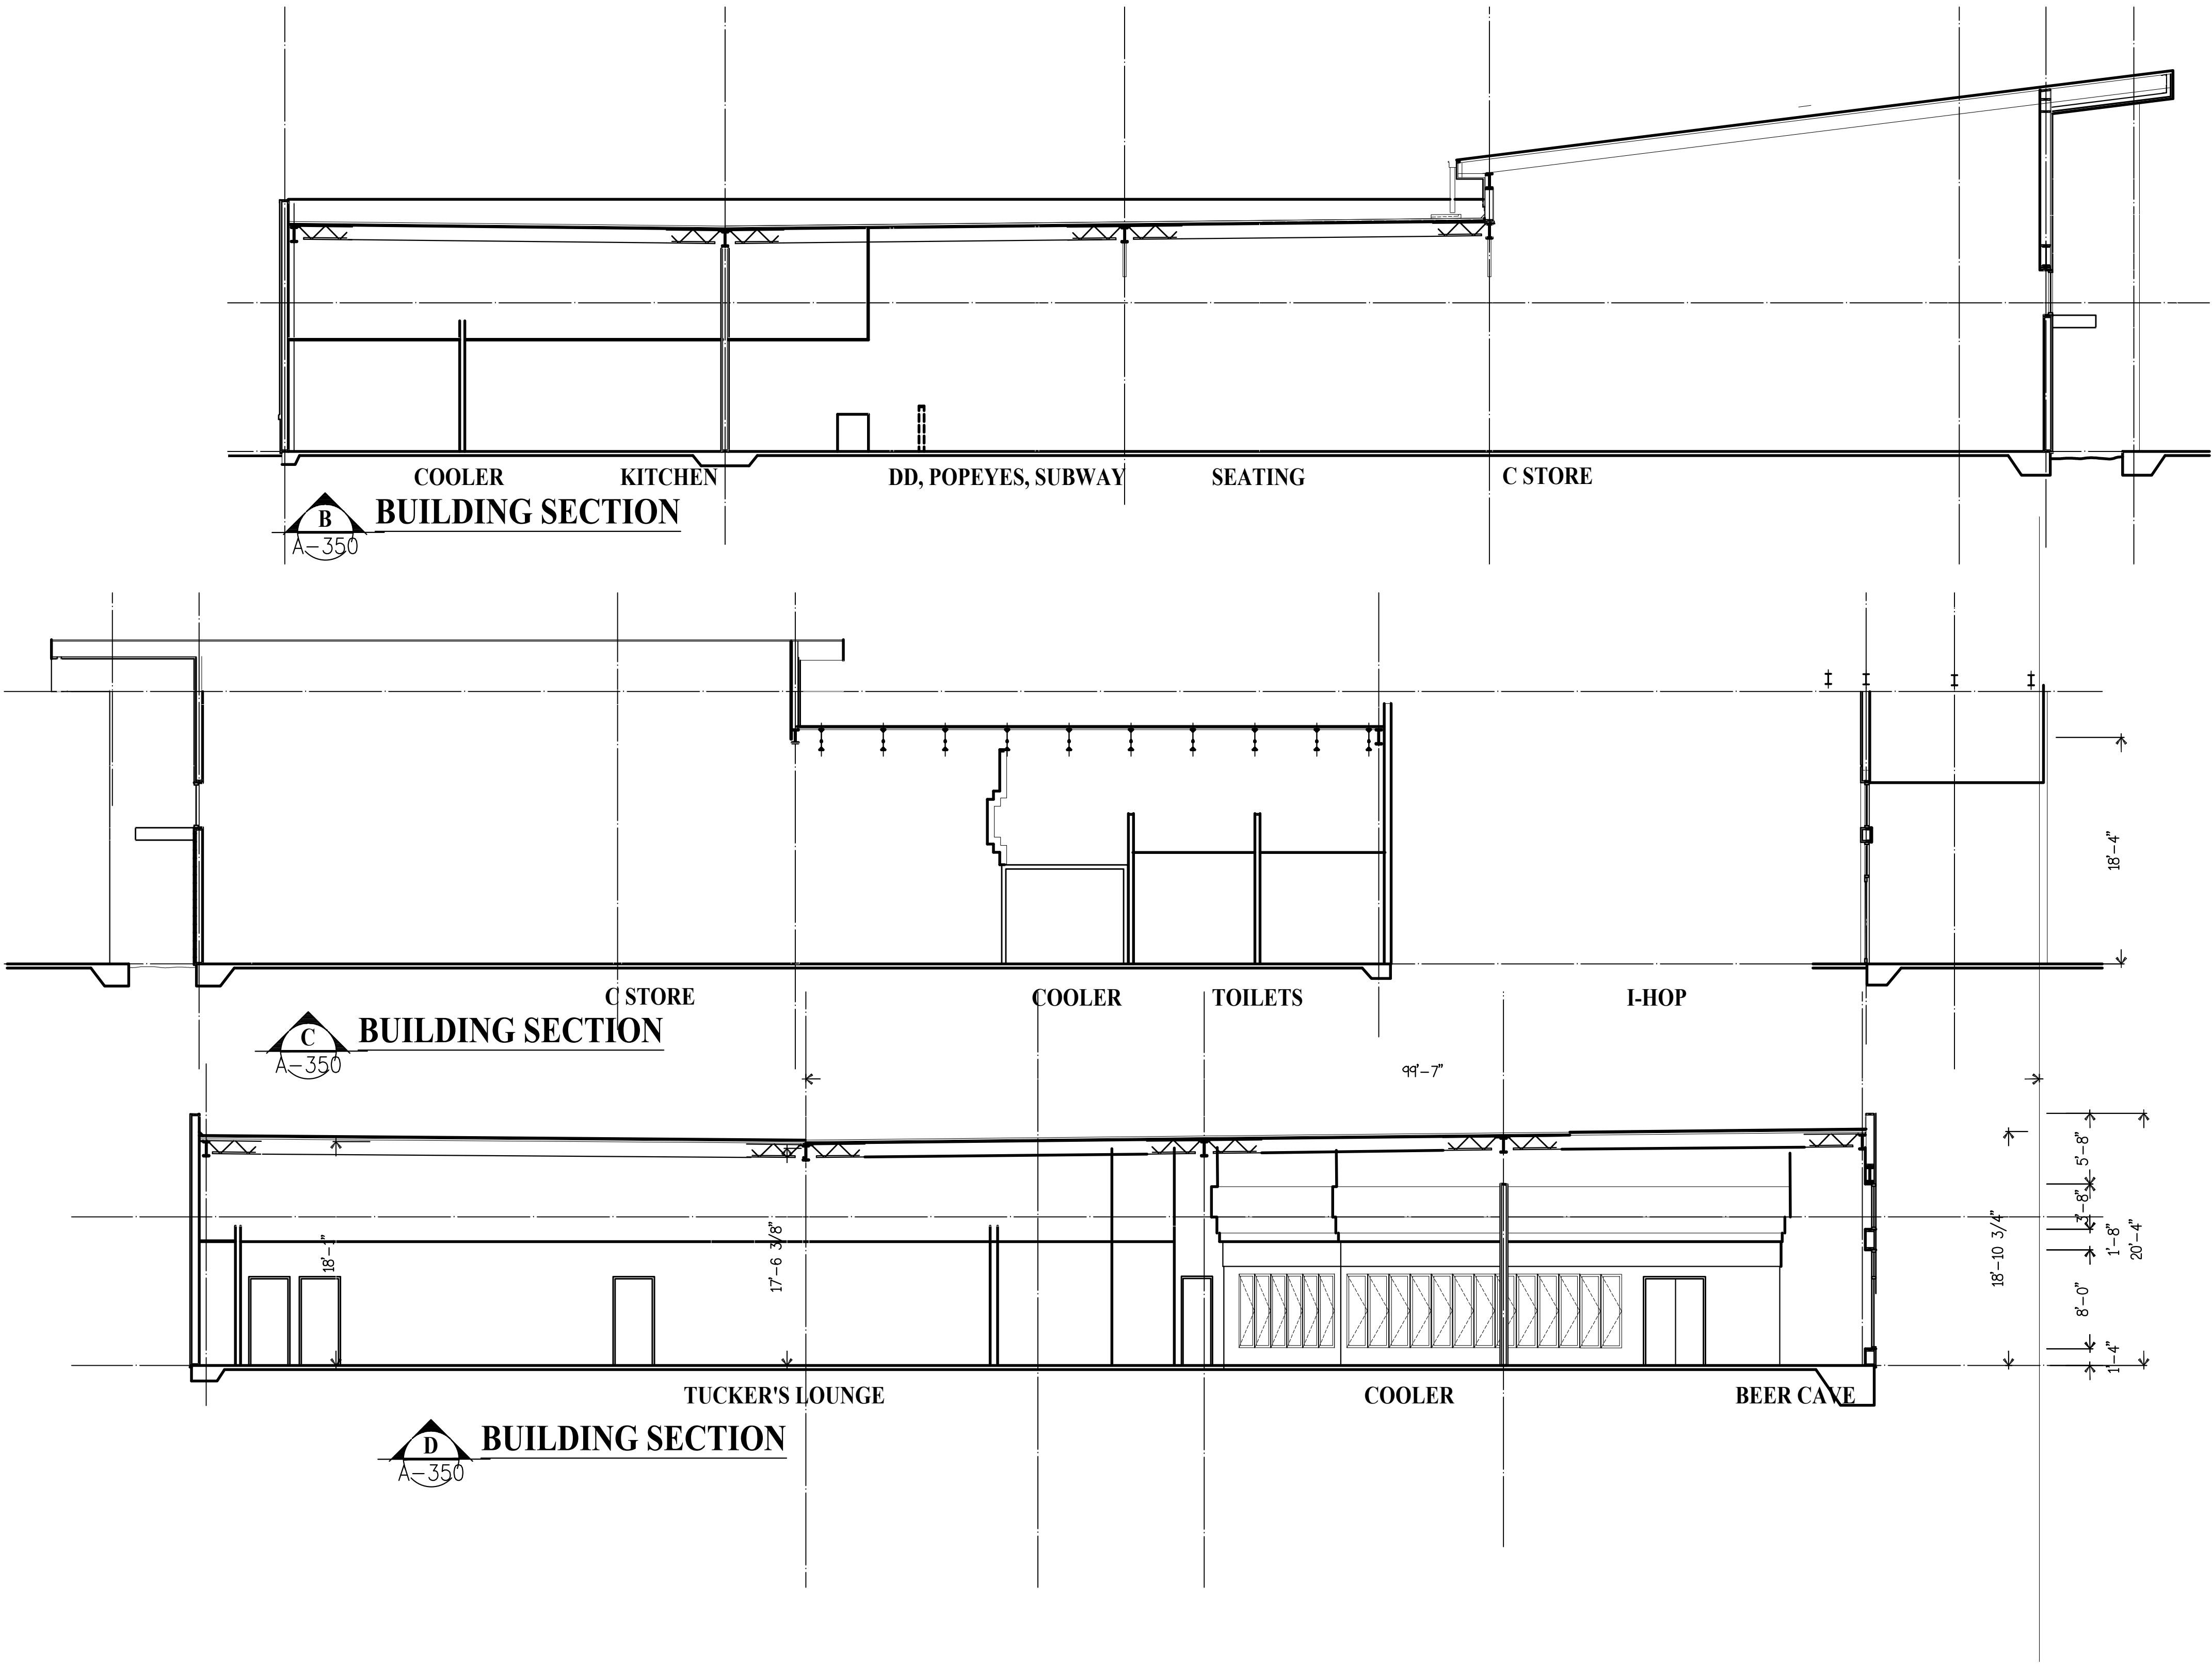


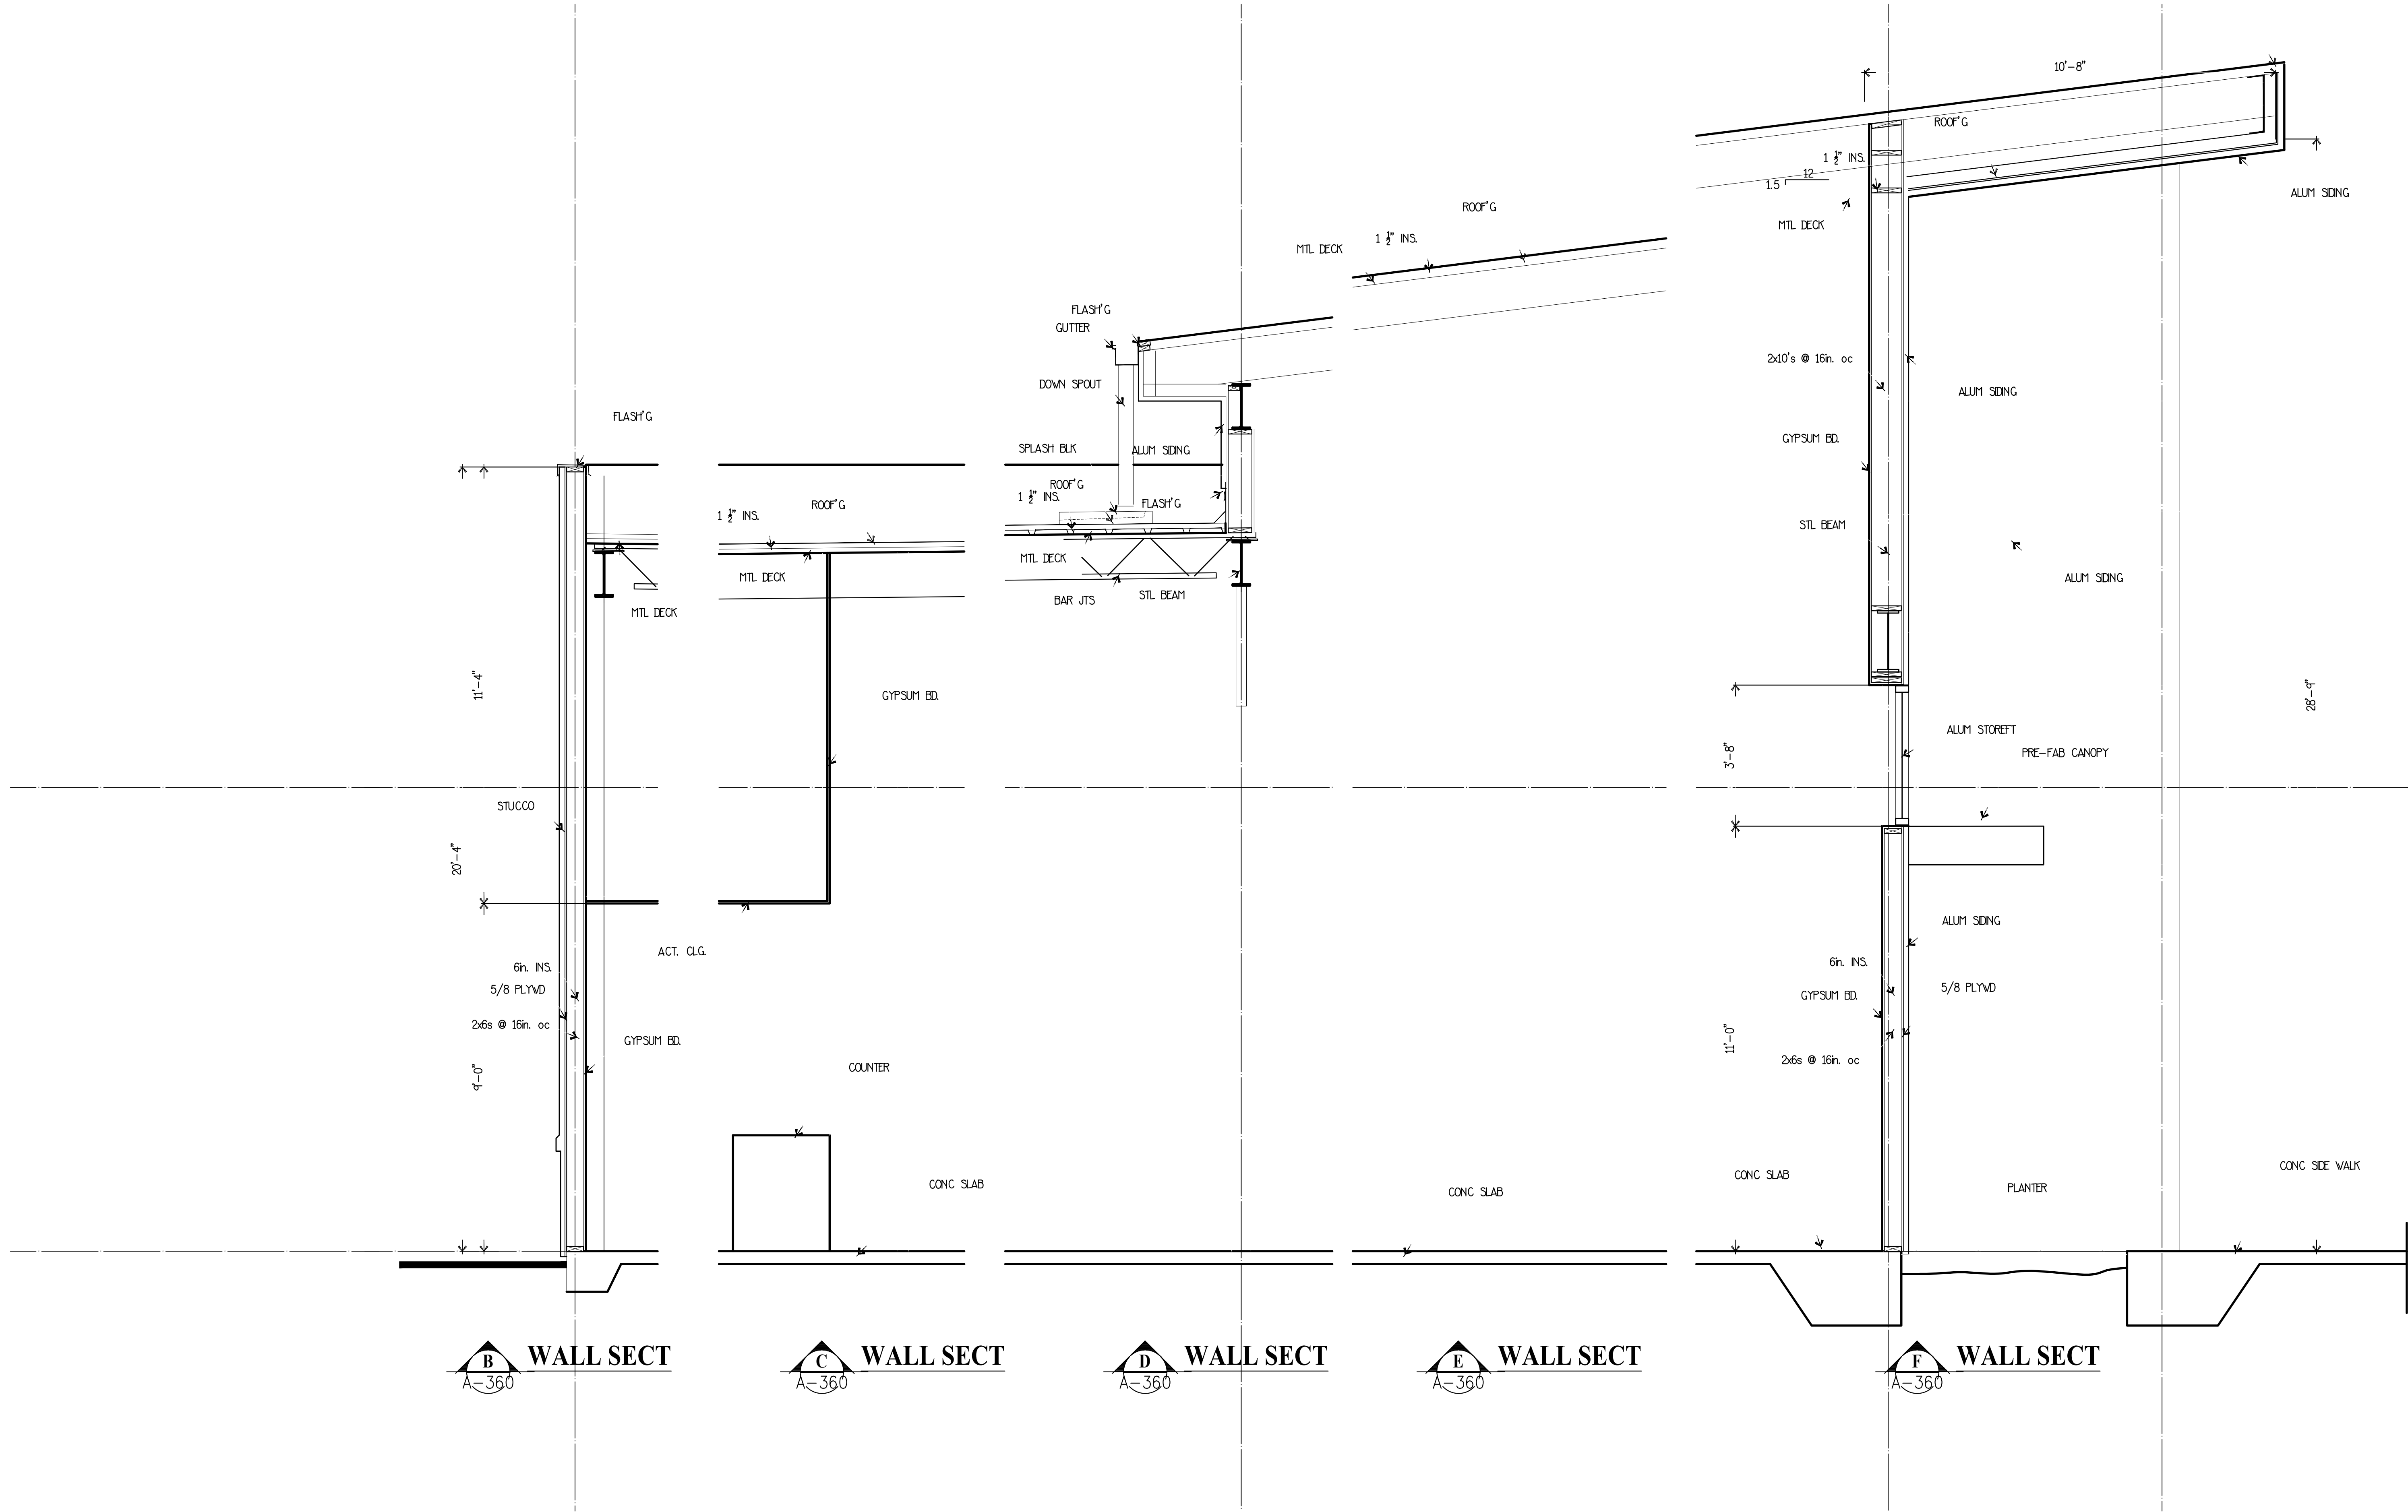


**STROUD
AND COMPANY**

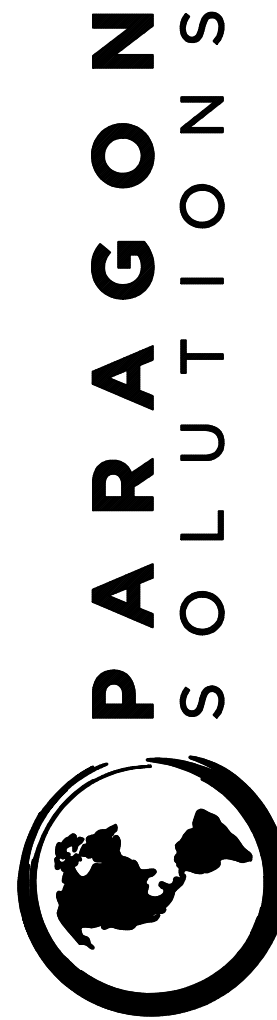


201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-927-7171

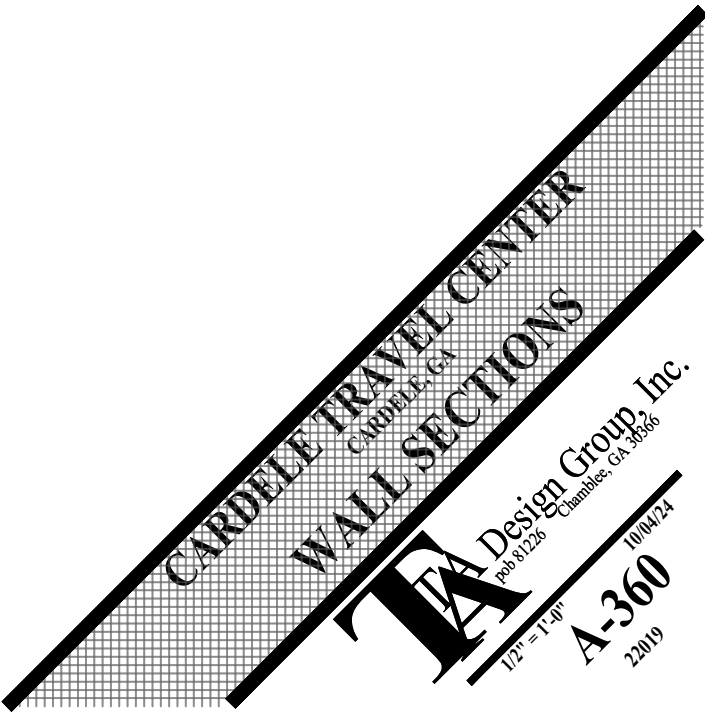


Design Group, Inc.
100-111-00
A-360
2011

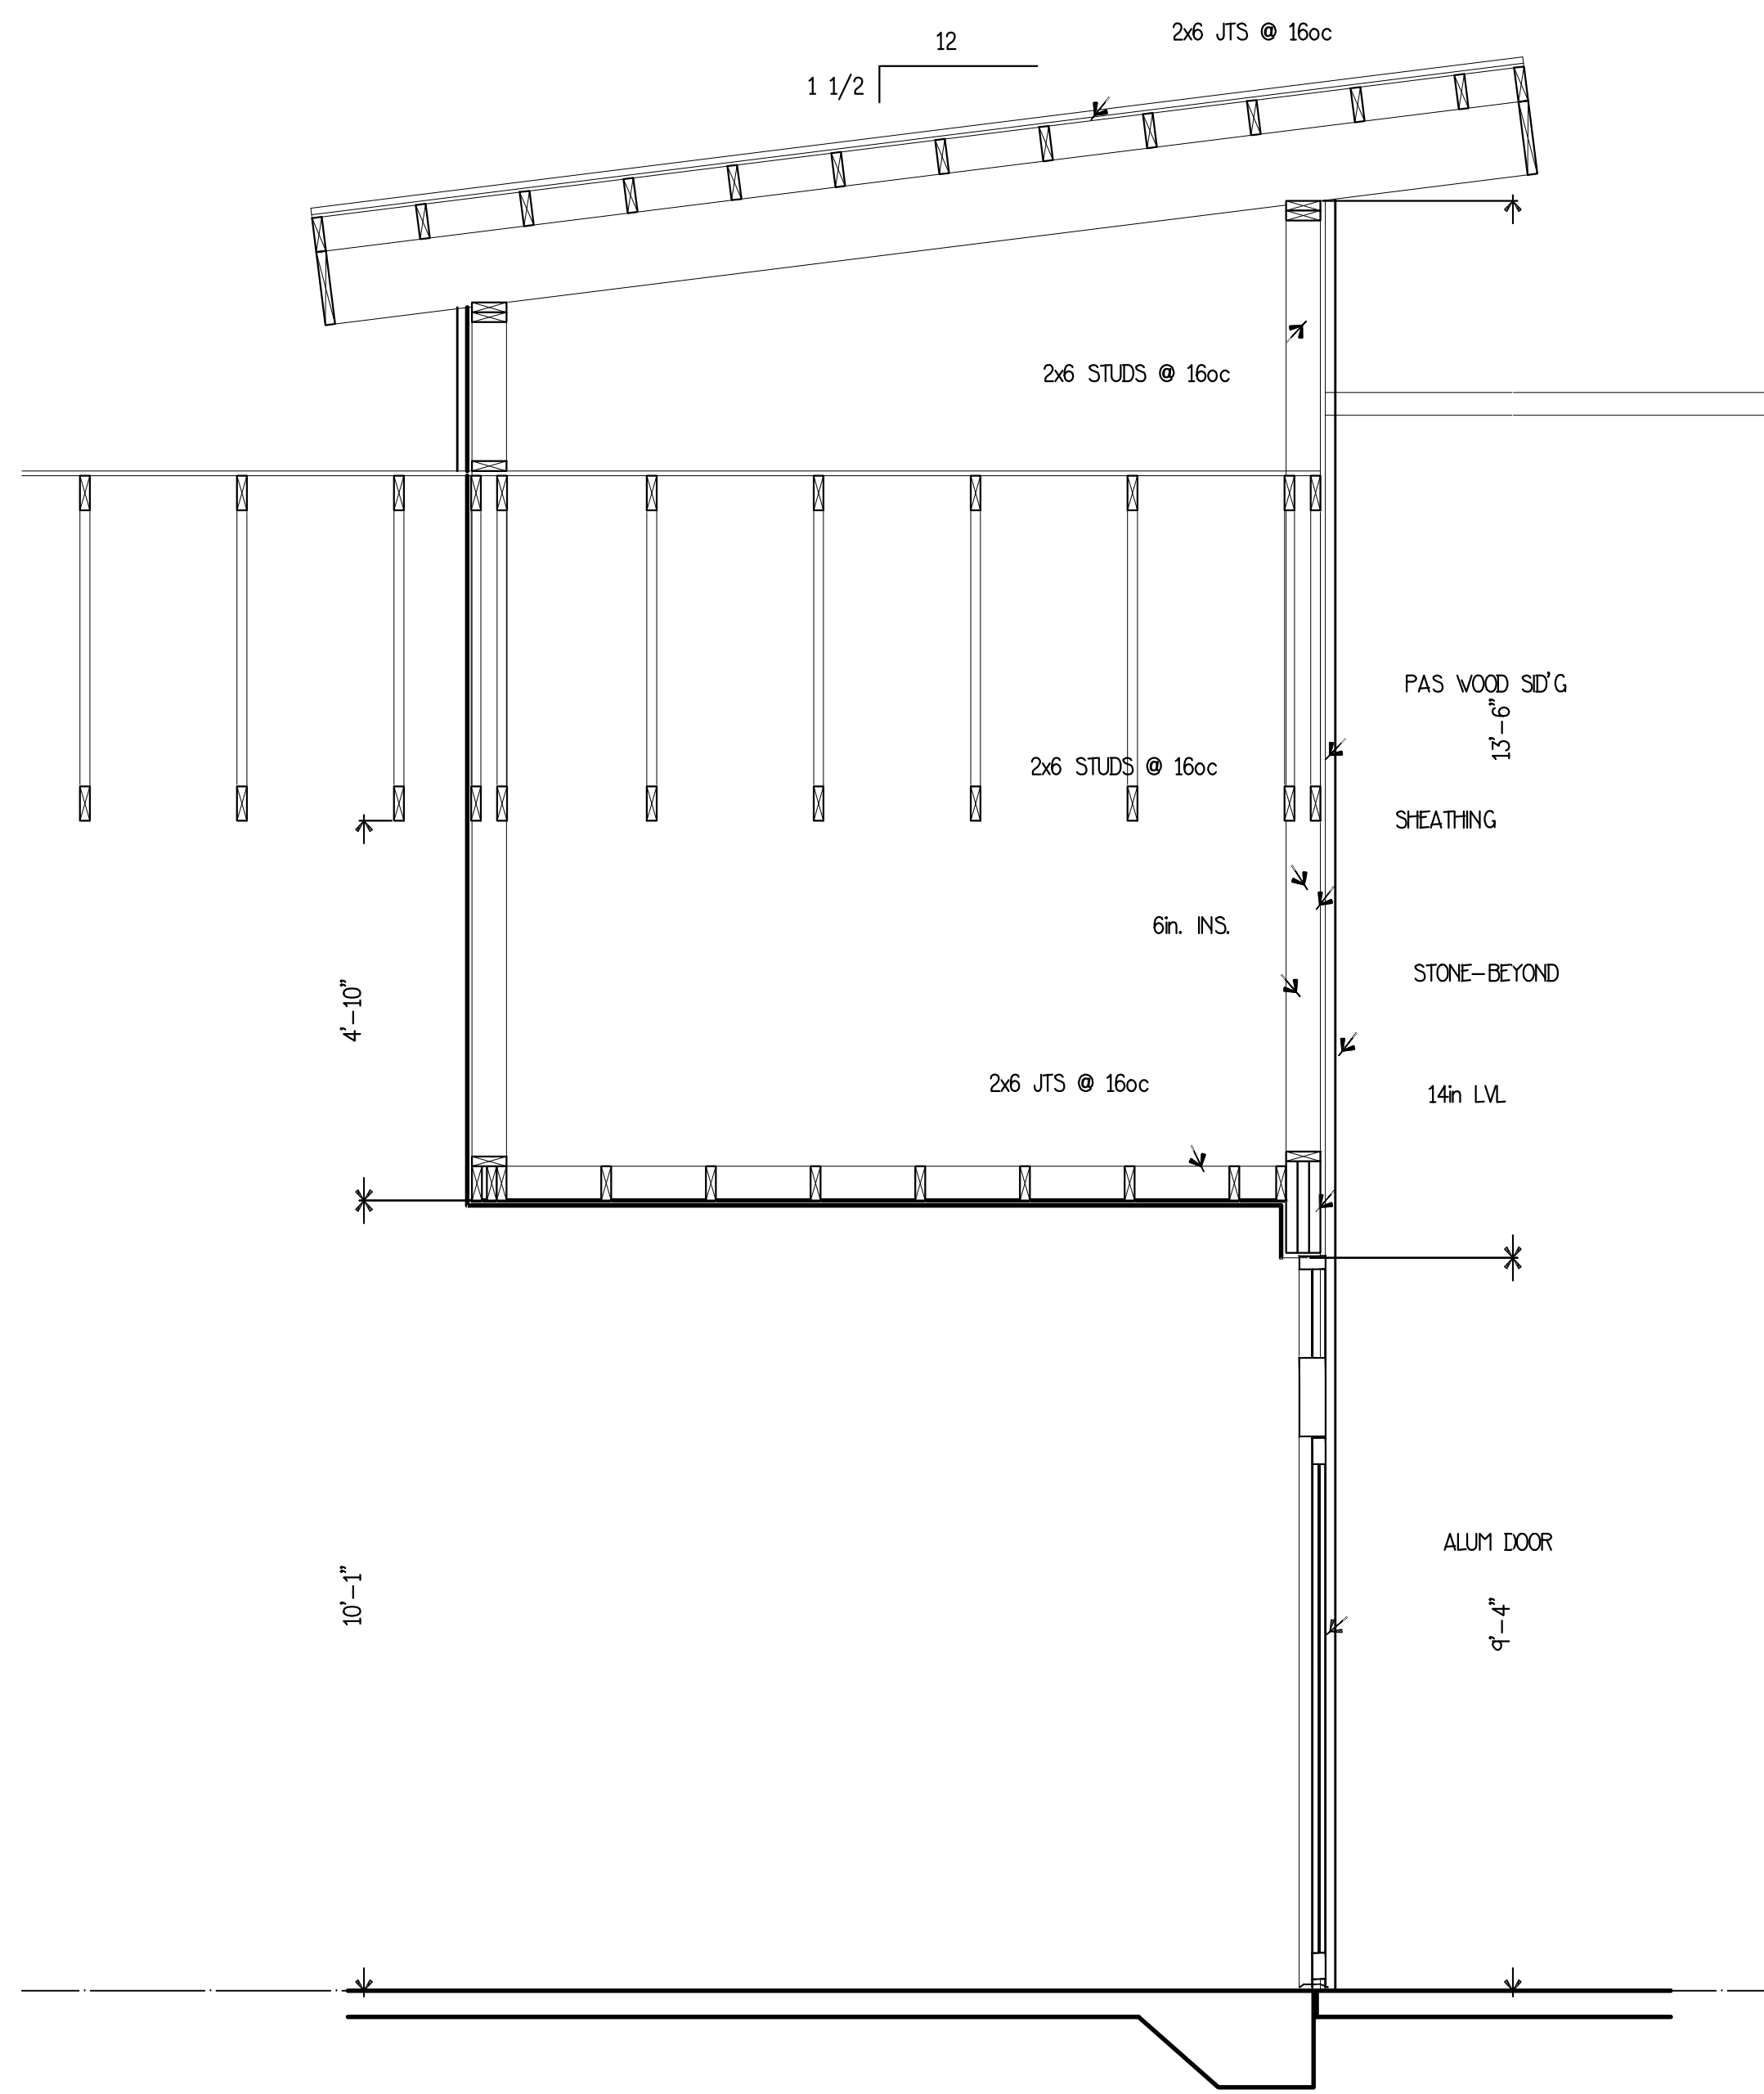


A
WALL SECT
A-361

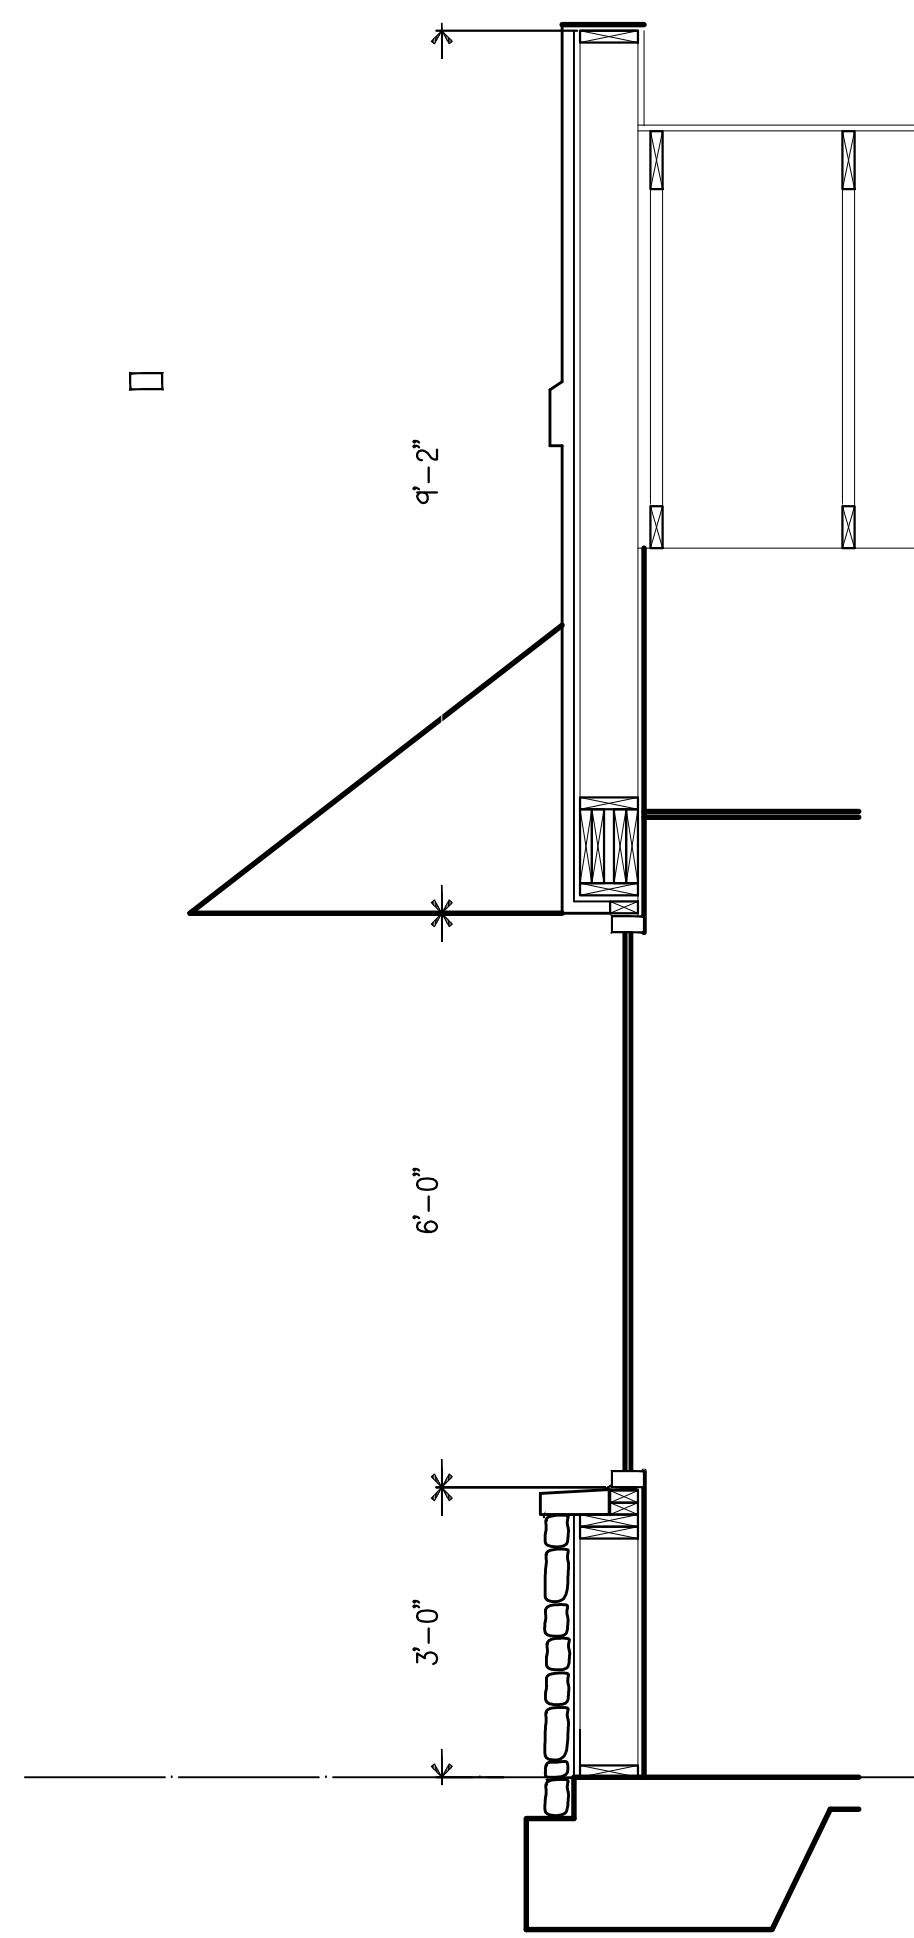

E
WALL SECT
A-361

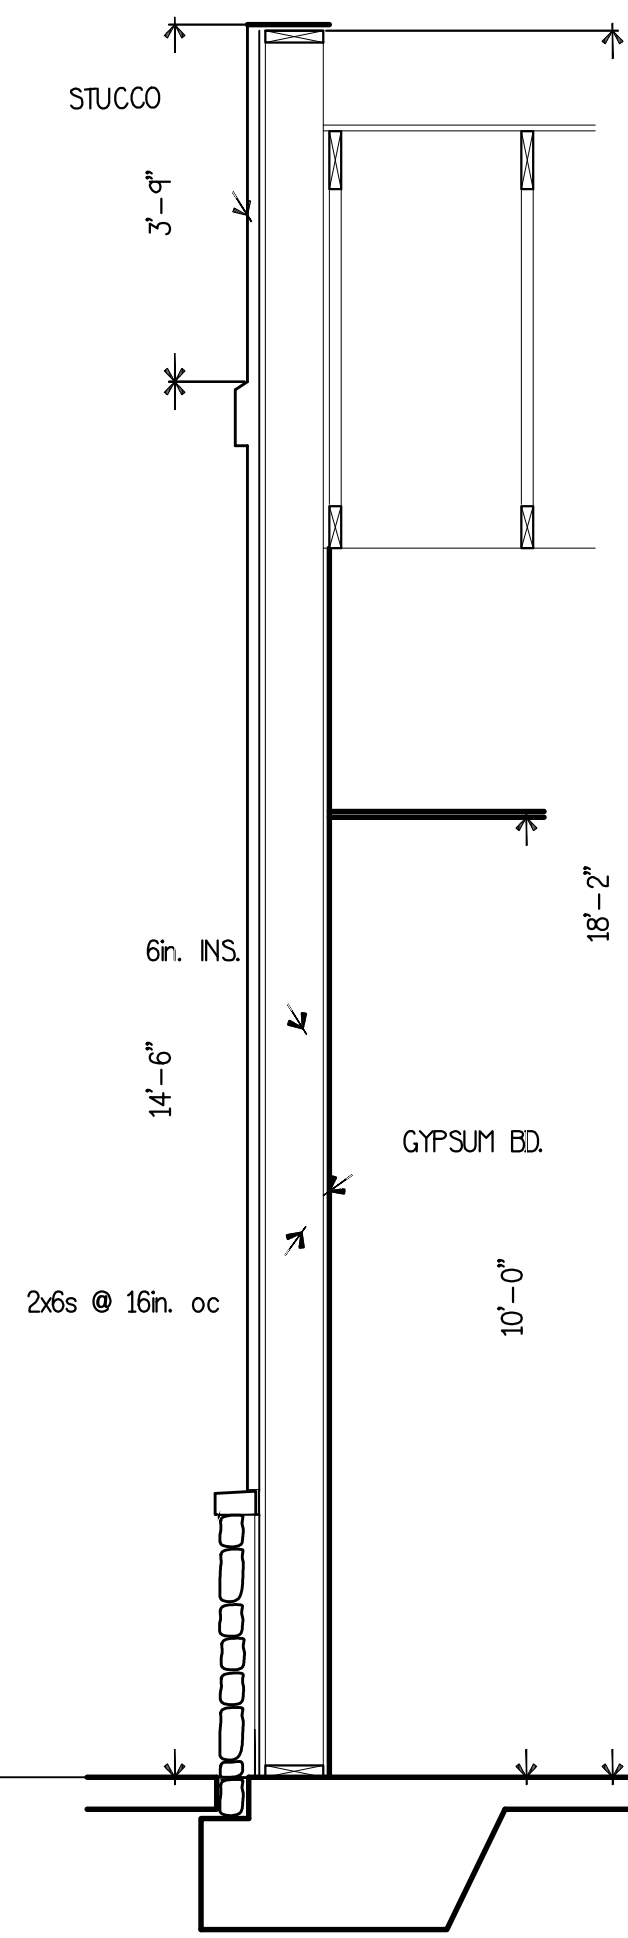


F
WALL SECT
A-361

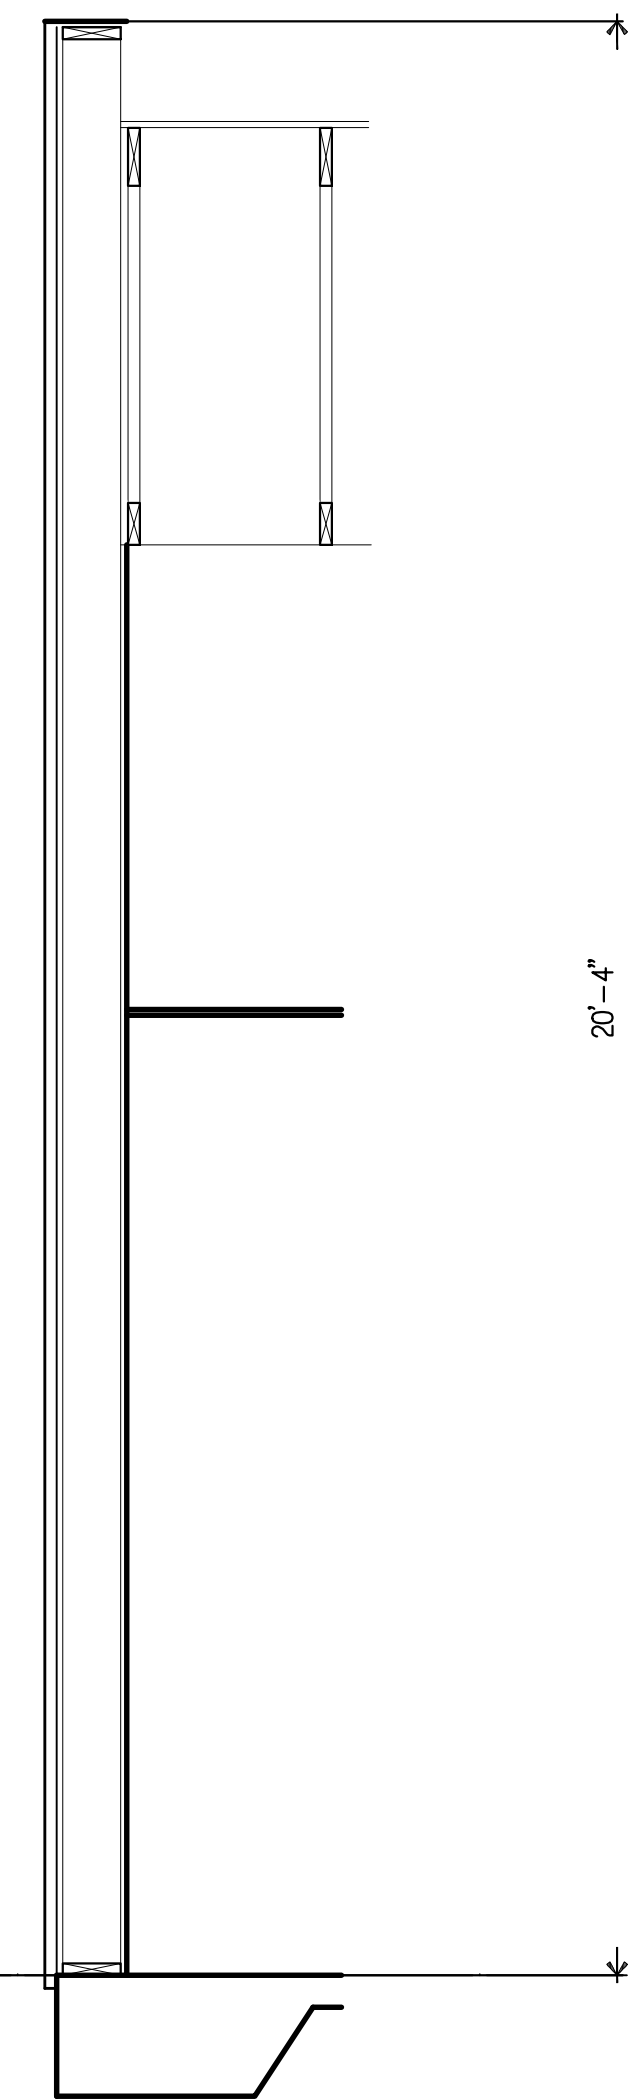


F
WALL SECT
A-361





STROUD
AND COMPANY

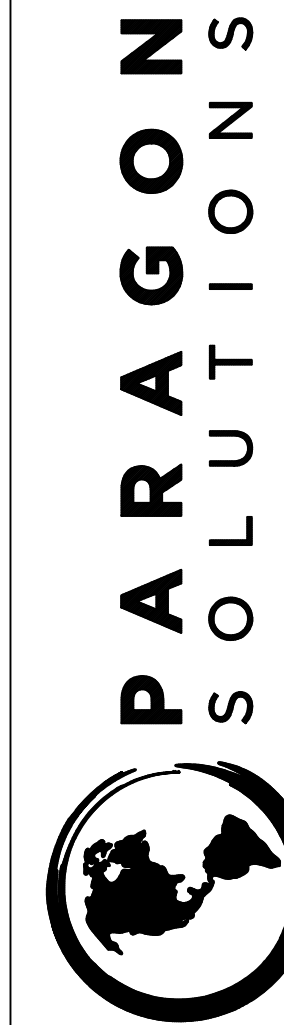


201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-827-7171

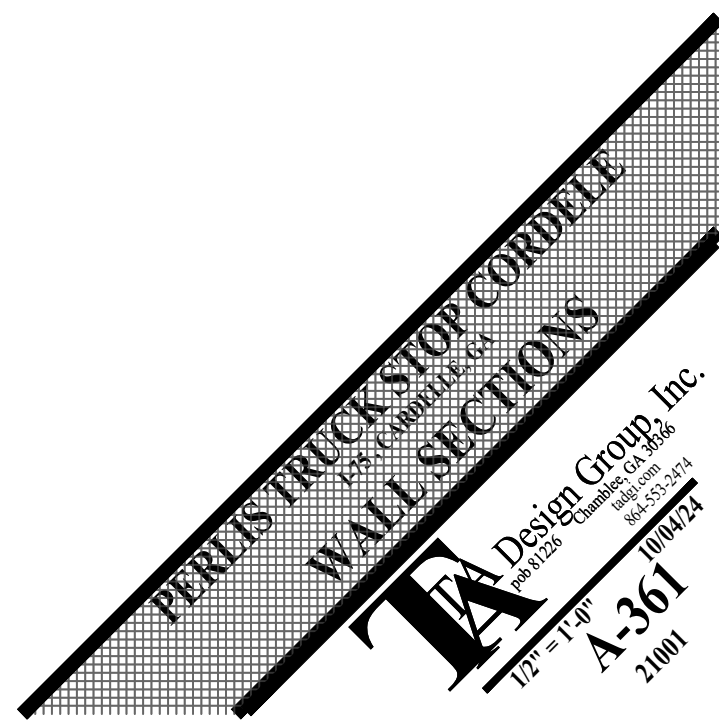


3788 - INTERIOR FINISH SCHEDULE			
ID	DESCRIPTION	COLOR	MANUFACTURER/CONTACT
P1	EGGSHELL FINISH INTERIOR LATEX WALL PAINT PAINT MIX TBD BY SUBSTRATE	#5W7004 SNOWBOUND	SHERWIN WILLIAMS PRINCESS CARTER - 972.561.7871 - PRINCESS.J.CARTER@SHERWIN.COM
QU1	3CM QUARTZ SURFACING	#Q4058 CALACATTA PASTINO	WILSONART LISA PORTILLO - 214.634.2310 - PORTILL@WILSONART.COM
PL1	PLASTIC LAMINATE - SOFTGRAIN FINISH	#7988-12 5TH AVE ELM	WILSONART LISA PORTILLO - 214.634.2310 - PORTILL@WILSONART.COM
PL2	PLASTIC LAMINATE - STANDARD HPL FINISH	#4880-35 CARBON MESH	WILSONART LISA PORTILLO - 214.634.2310 - PORTILL@WILSONART.COM
PL3	PLASTIC LAMINATE - STANDARD HPL FINISH	#17015-67 RALEIGH WALNUT	WILSONART LISA PORTILLO - 214.634.2310 - PORTILL@WILSONART.COM
SW1	3" SLATWALL WITH LAMINATE INSERTS	FACE OF SLATWALL TO BE (PL1) FACE OF SLATWALL TO BE (PL1)	MARLITE (OR COMPARABLE) NICK VILARDELL - 330.260.7624 - NVILARDELL@MARLITE.COM
BR1	ARCHITECTURAL BRICK VENEER (FLATS & CORNERS)	#VOLCANIC BLACK ULTRA PREMIUM NORMAN SIZE #MEDIUM GRAY MORTAR	KING KLINKER THRU ACME BRICK AMY COOLEY - ACOOLEY@BRICK.COM - 817.332.4101
M1	7/8" METAL WALL PANELING (COORDINATING TRIM PIECES TO MATCH)	#WESTERN WAVE - MATTE BLACK	WESTERN STATES METAL ROOFING WWW.WESTERNSTATESMETALROOFING.COM
WT1	8 X 48 COLORBODY PORCELAIN TILE WALL TILE - SEE COLORED RENDERINGS FOR INSTALL PATTERN	NATURALIZED - OAK MATTE CUSTOM BUILDING PRODUCTS #145 LIGHT SMOKE GROUT (1/8" LINES)	CREATIVE MATERIALS CORP. DEIRDRE SCHUTH - 518.713.5384 - DSCHUTH@CREATIVEMATERIALSCORP.COM
WT2	3 X 12 COLORBODY PORCELAIN TILE WALL TILE - VERTICAL STACKED BOND INSTALLATION	BRIXTON - WARM GREY O2 CUSTOM BUILDING PRODUCTS #165 DELOREAN GRAY GROUT (1/8" LINES)	CREATIVE MATERIALS CORP. DEIRDRE SCHUTH - 518.713.5384 - DSCHUTH@CREATIVEMATERIALSCORP.COM
WT3	12 X 24 COLORBODY PORCELAIN TILE WALL TILE - VERTICAL STACKED BOND INSTALLATION	GRAMERCY - BEIGE CUSTOM BUILDING PRODUCTS #386 OYSTER GRAY GROUT (1/8" LINES)	CREATIVE MATERIALS CORP. DEIRDRE SCHUTH - 518.713.5384 - DSCHUTH@CREATIVEMATERIALSCORP.COM
B1	6" PINNACLE RUBBER COVE WALL BASE (AT CABINETRY)	#100 BLACK	ROPPE (OR COMPARABLE) 1.800.537.9527
B2	6" TILE WALL BASE WITH SCHLUTER COVE #DILEX-AHKA PROFILE IN #ANODIZED ALUMINUM	OXIDIZE - LIGHT GREY CUSTOM BUILDING PRODUCTS #543 DRIFTWOOD (3/16" GROUT LINES)	DEIRDRE SCHUTH - 518.713.5384 - DSCHUTH@CREATIVEMATERIALSCORP.COM CREATIVE MATERIALS CORP.
B3	3/8" METAL COVE WALL BASE	#DILEX-AHK PROFILE IN #SATIN ANODIZED ALUMINUM	SCHLUTER SYSTEMS (THRU FLORIDA TILE) SPRING MARSA LIS - 469.340.8868 - SPRING.MARSA LIS@FLORIDATILE.COM
TR1	2.5" PAINTED WOOD TRIM	PAINTED TO MATCH (BR1)	LOCAL WOOD SUPPLIER SOURCED BY GENERAL CONTRACTOR
TR2	METAL TRIM	#JOLLY PROFILE IN #SATIN ANODIZED ALUMINUM	SCHLUTER SYSTEMS (THRU FLORIDA TILE) SPRING MARSA LIS - 469.340.8868 - SPRING.MARSA LIS@FLORIDATILE.COM
F1	SEALED NATURAL CONCRETE FLOOR FINISH	UNSTAINED	BY LOCAL SUPPLIER SOURCED BY GENERAL CONTRACTOR
F2	24 X 24 COLORBODY PORCELAIN TILE FLOOR FINISH - STACKED BOND INSTALLATION	OXIDIZE - LIGHT GREY CUSTOM BUILDING PRODUCTS #543 DRIFTWOOD (3/16" GROUT LINES)	DEIRDRE SCHUTH - 518.713.5384 - DSCHUTH@CREATIVEMATERIALSCORP.COM CREATIVE MATERIALS CORP.
F3	2 x 2 MOSAIC COLORBODY PORCELAIN TILE FLOOR FINISH - 12X12 SHEETS	OXIDIZE - LIGHT GREY CUSTOM BUILDING PRODUCTS #543 DRIFTWOOD	DEIRDRE SCHUTH - 518.713.5384 - DSCHUTH@CREATIVEMATERIALSCORP.COM CREATIVE MATERIALS CORP.
INTERIOR FINISH GENERAL NOTES			
1	ROUTE ALL ELECTRICAL COMPONENTS TO DECORATIVE LIGHTING OUT OF CUSTOMER'S VIEW, IF APPLICABLE.		
2	SCHLUTER STAINLESS STEEL CORNER GUARDS USED ON ALL HIGH TRAFFIC WALLS.		
3	SCHLUTER ECK-K STAINLESS STEEL EDGING PROFILE FOR OUTSIDE CORNERS OF ALL TILED WALLS.		
4	USE ALUMINUM KICK PLATES ON BOTH THE INSIDE AND OUTSIDE OF RESTROOM DOORS, IF APPLICABLE.		
5	ALL FIXTURES ON DOORS AND JAMBS TO BE SATIN BRUSHED ALUMINUM UNLESS OTHERWISE SPECIFIED.		
6	MAIN SALES CABINET TO BE FINISHED IN (PL1) ON EMPLOYEE SERVICE SIDE AND SUPPORT AREAS.		
7	FINAL DETAILS OF ALL CABINETRY COORDINATED BETWEEN OWNER AND/OR GC AND MILLWORK OR METAL CABINET FABRICATOR.		
8	ALL WALLS THAT ARE NOT DRYWALL (INCLUDING BUT NOT LIMITED TO TILE, WOOD, MASONRY, ECT.) TO BE REINFORCED WITH GREEN BOARD BEHIND WALL FINISHES.		
9	ALL TILE GROUT TO HAVE CLEAR SEALANT (GROUT COLORS SPECIFIED ON FINISH SCHEDULE.)		
10	ALL B.O.H. WALLS TBD BY OWNER AND/OR FOOD SERVICE PROGRAM, IF APPLICABLE.		
11	MANAGER OFFICE WALLS PAINTED (P1) WITH (B1) AND (PL1) MILLWORK WITH (QU1) COUNTERTOPS, IF APPLICABLE.		
12	DIGITAL SCREENS/MENU BOARD SIZES, MAKES, MODELS, QUANTITY, MOUNTING HEIGHTS, ECT. TO BE VERIFIED BY OWNER AND/OR FOOD SERVICE PROGRAM PRIOR TO PURCHASE AND INSTALLATION, IF APPLICABLE.		
13	REFERENCE COLORED INTERIOR RENDERINGS BY PARAGON SOLUTIONS FOR OVERALL APPEARANCE OF MATERIAL PLACEMENT.		
14	ANY AND ALL MATERIAL SUBSTITUTIONS MUST BE APPROVED BY PARAGON SOLUTIONS.		
15	ALLOW 4-6 WEEKS (MINIMUM) LEAD TIME FOR ORDERING.		
16	CORPORATE QSR AREA(S) (INCLUDING BUT NOT LIMITED TO FINISHES, GRAPHICS, MENU BOARDS, MILLWORK, SOFFIT HEIGHTS, ETC.) TBD BY VENDORS, IF APPLICABLE.		
17	WALLS THAT WILL BE COVERED WITH VINYL GRAPHIC WALLCOVERING(S) TO BE PRIMED WITH PRO-935 R-35® ADHESION PROMOTING WALLCOVERING PRIMER BY ROMAN DECORATING PRODUCTS.		

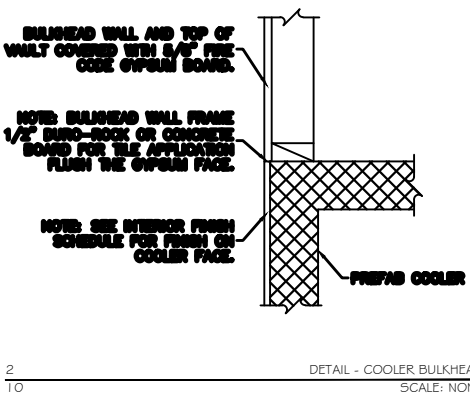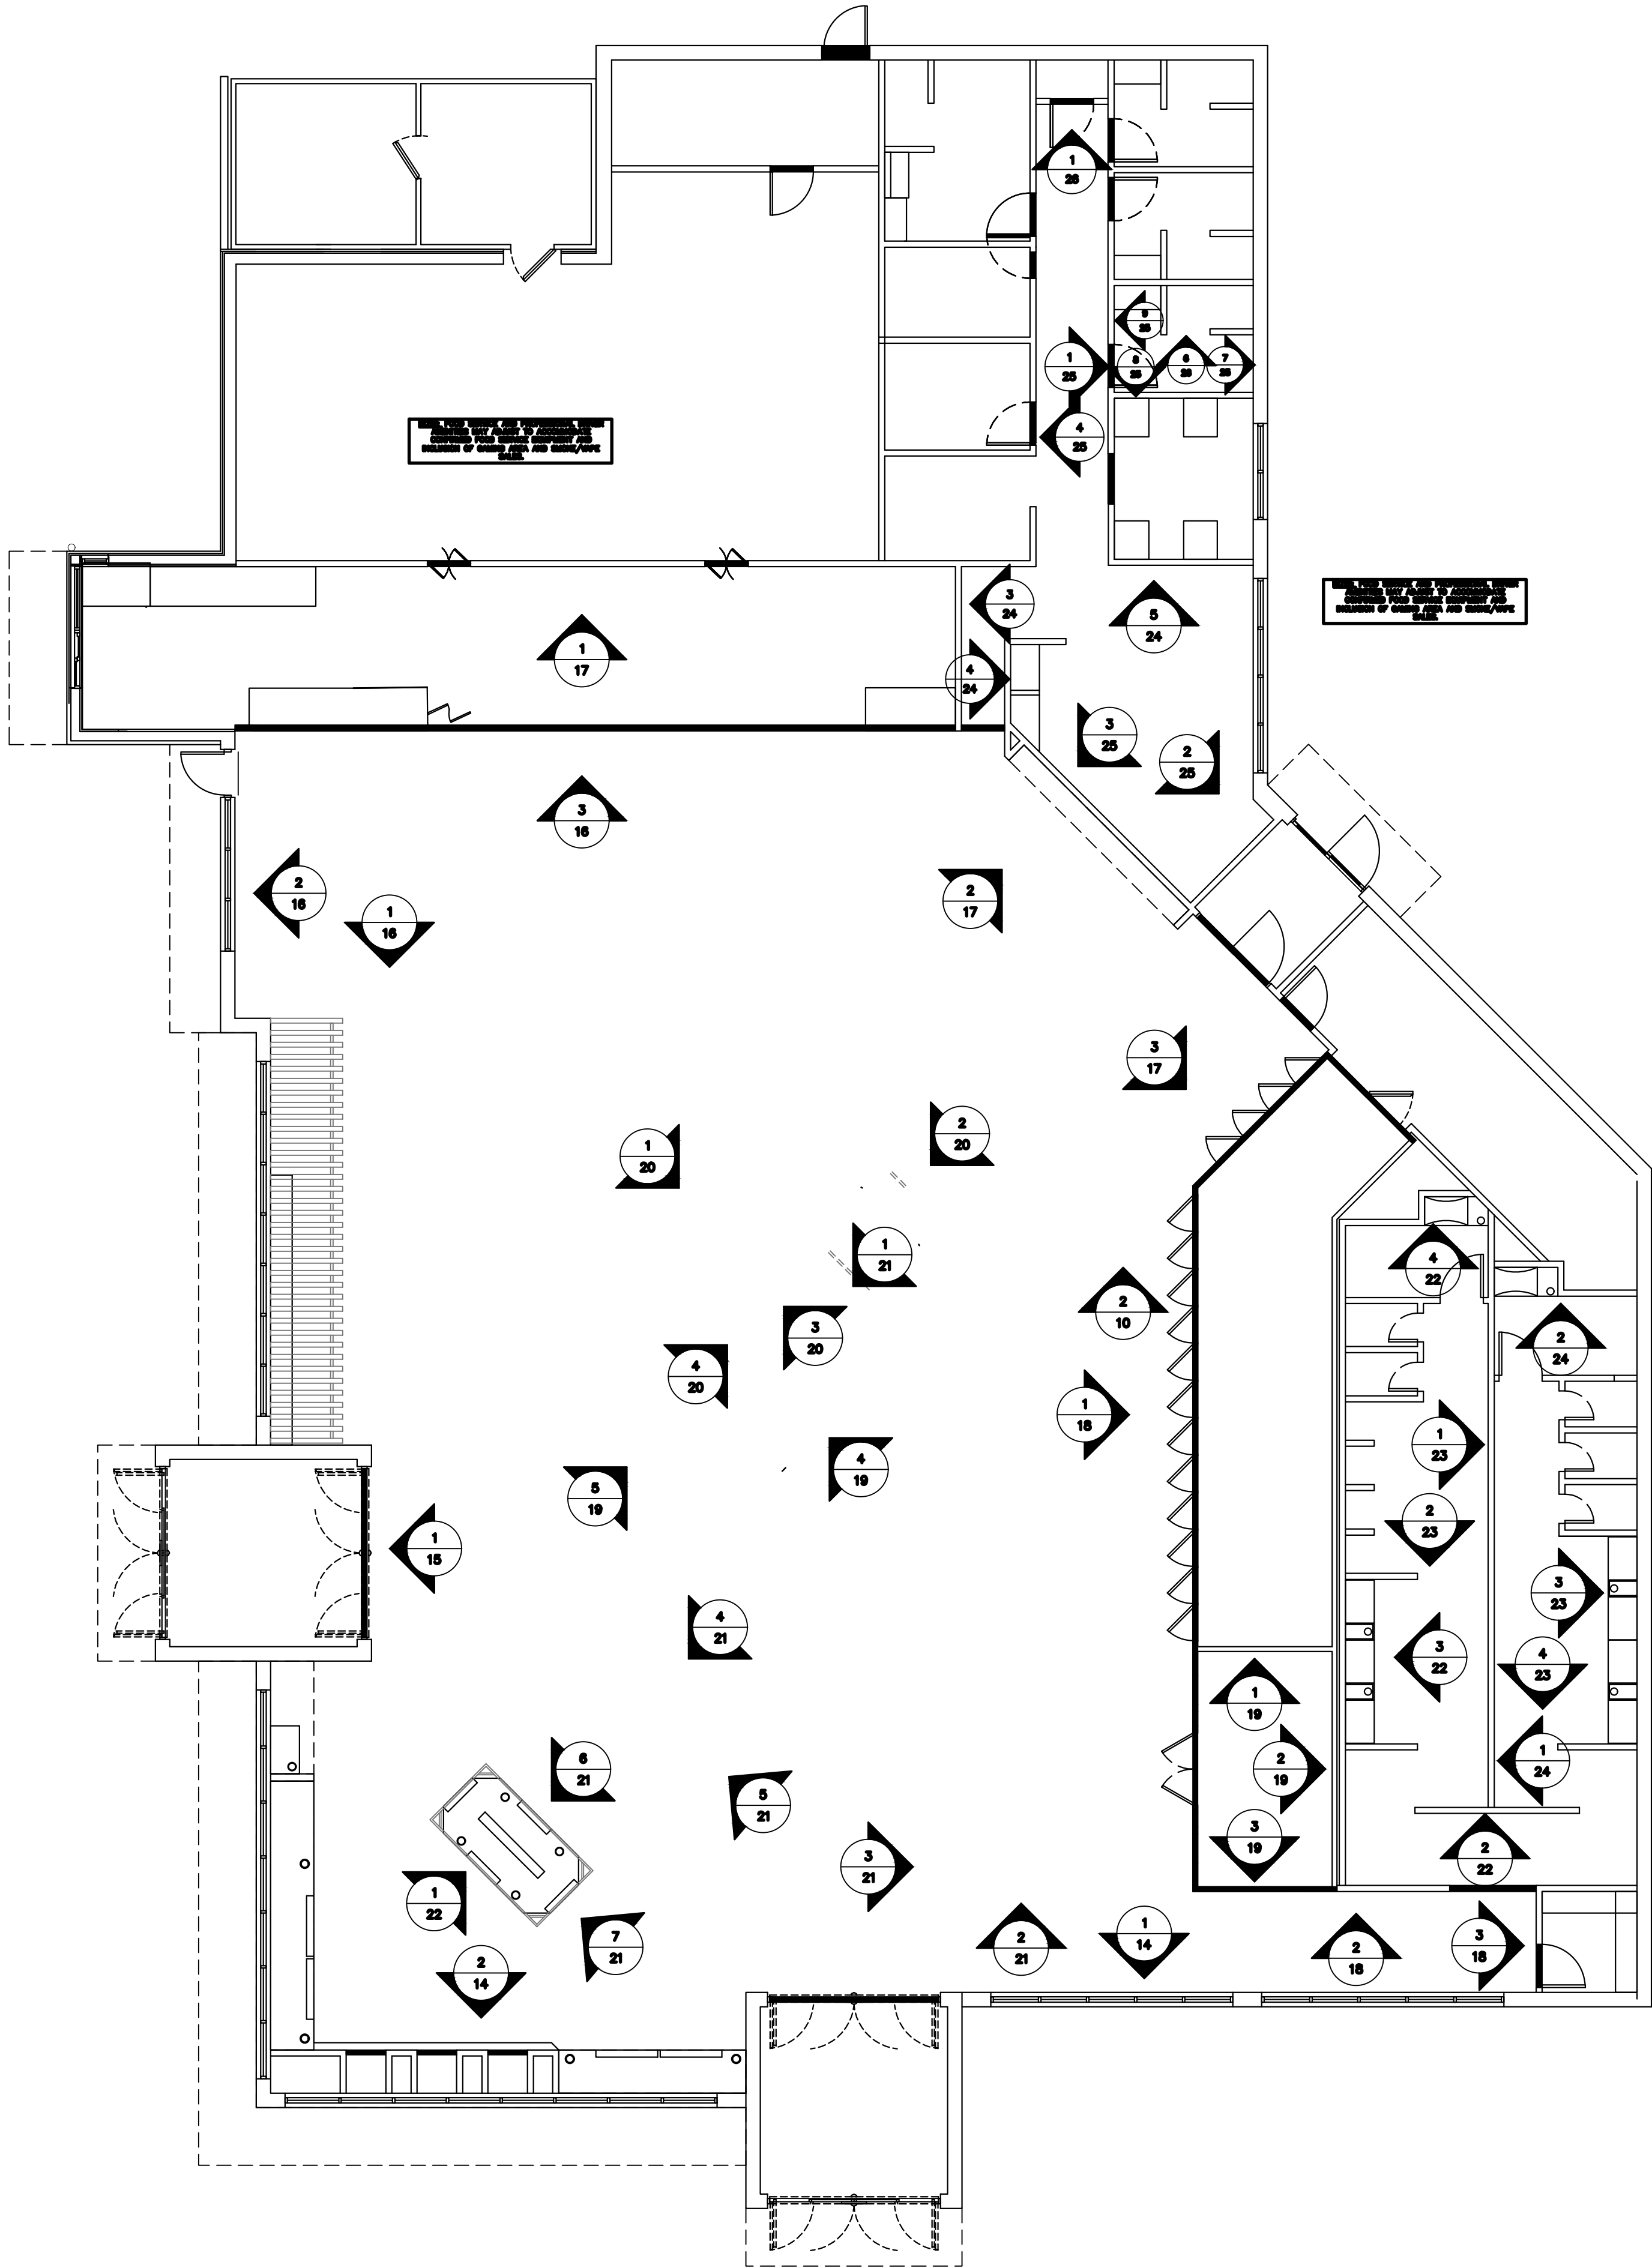


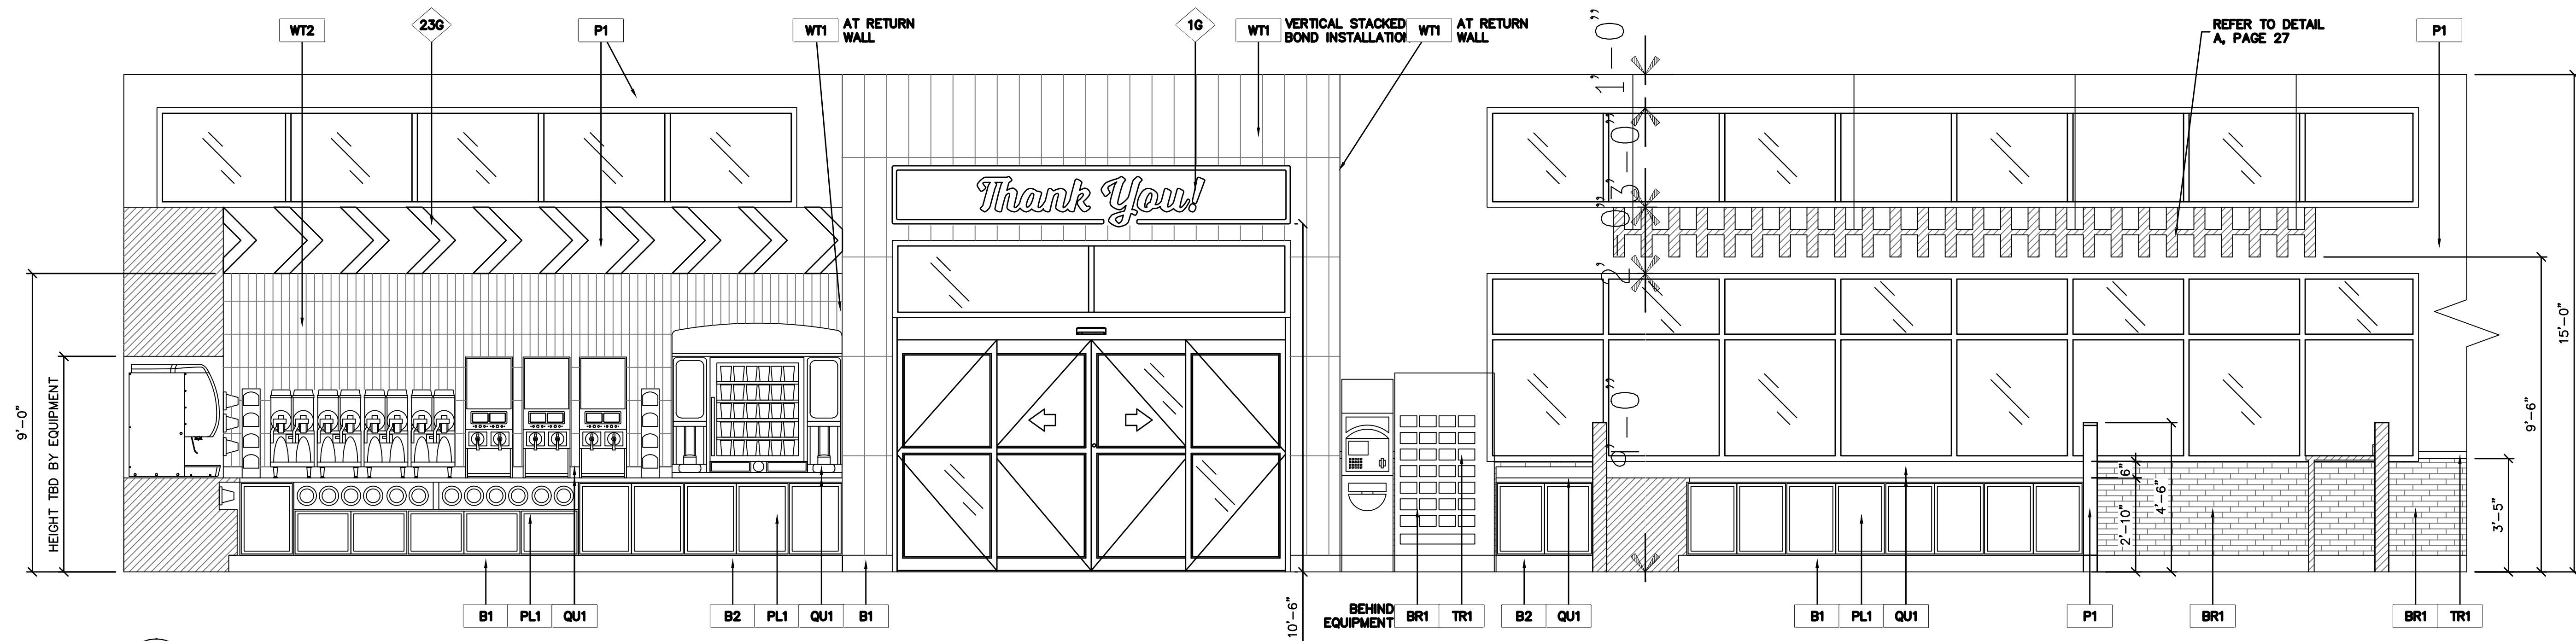

1
15
ELEVATION - FROZEN BEVERAGE COUNTER, SIDE ENTRANCE & BEHIND CASHIER

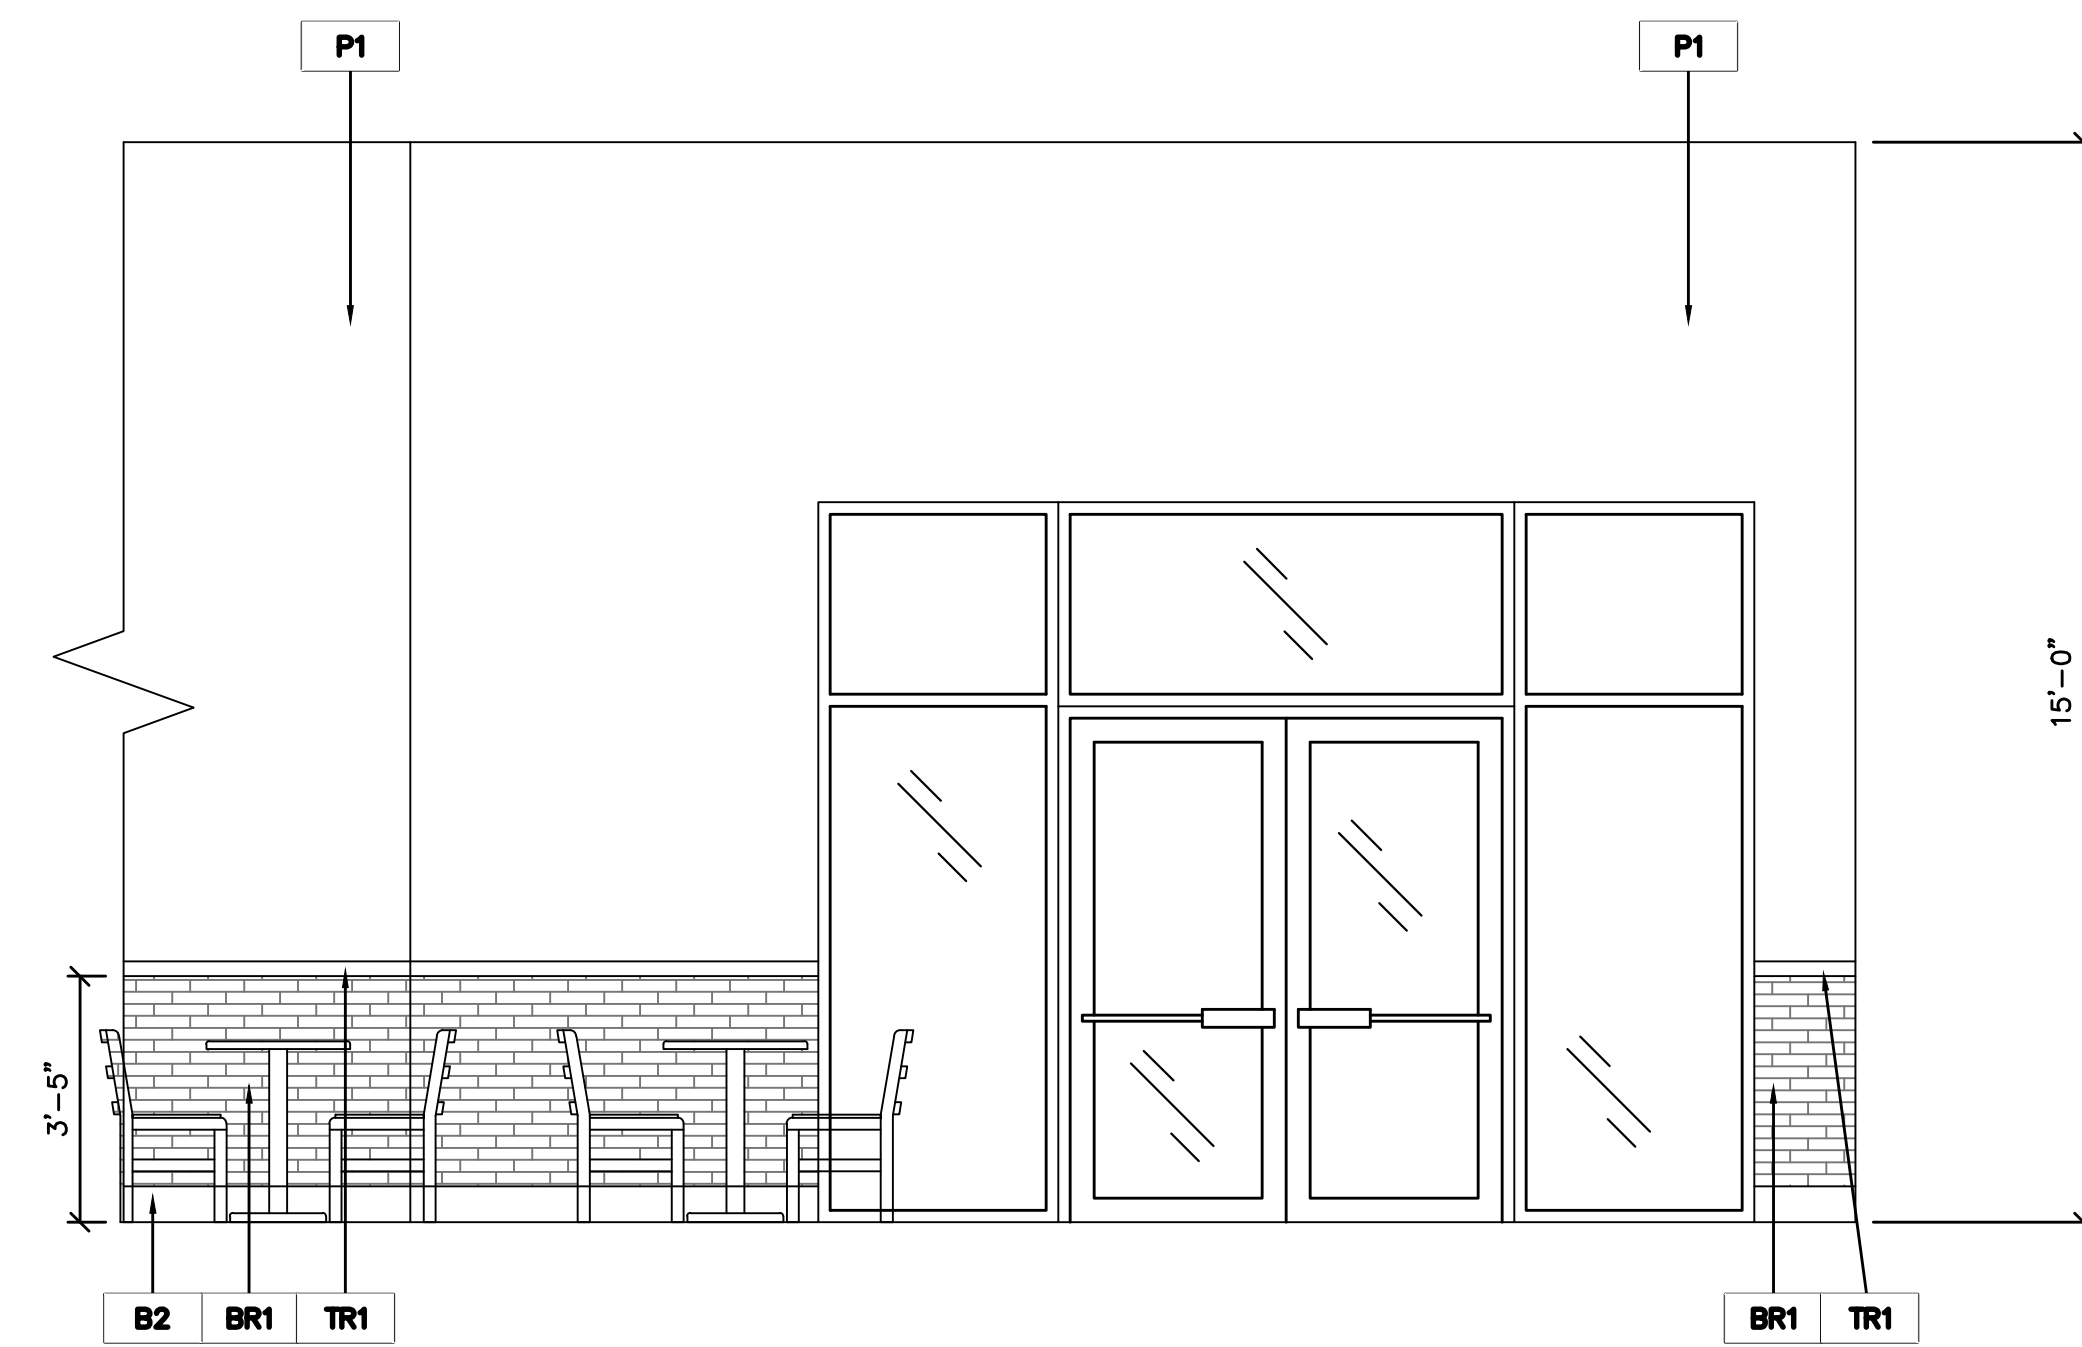


2
15
ELEVATION - SEATING AREA & QSR ENTRANCE

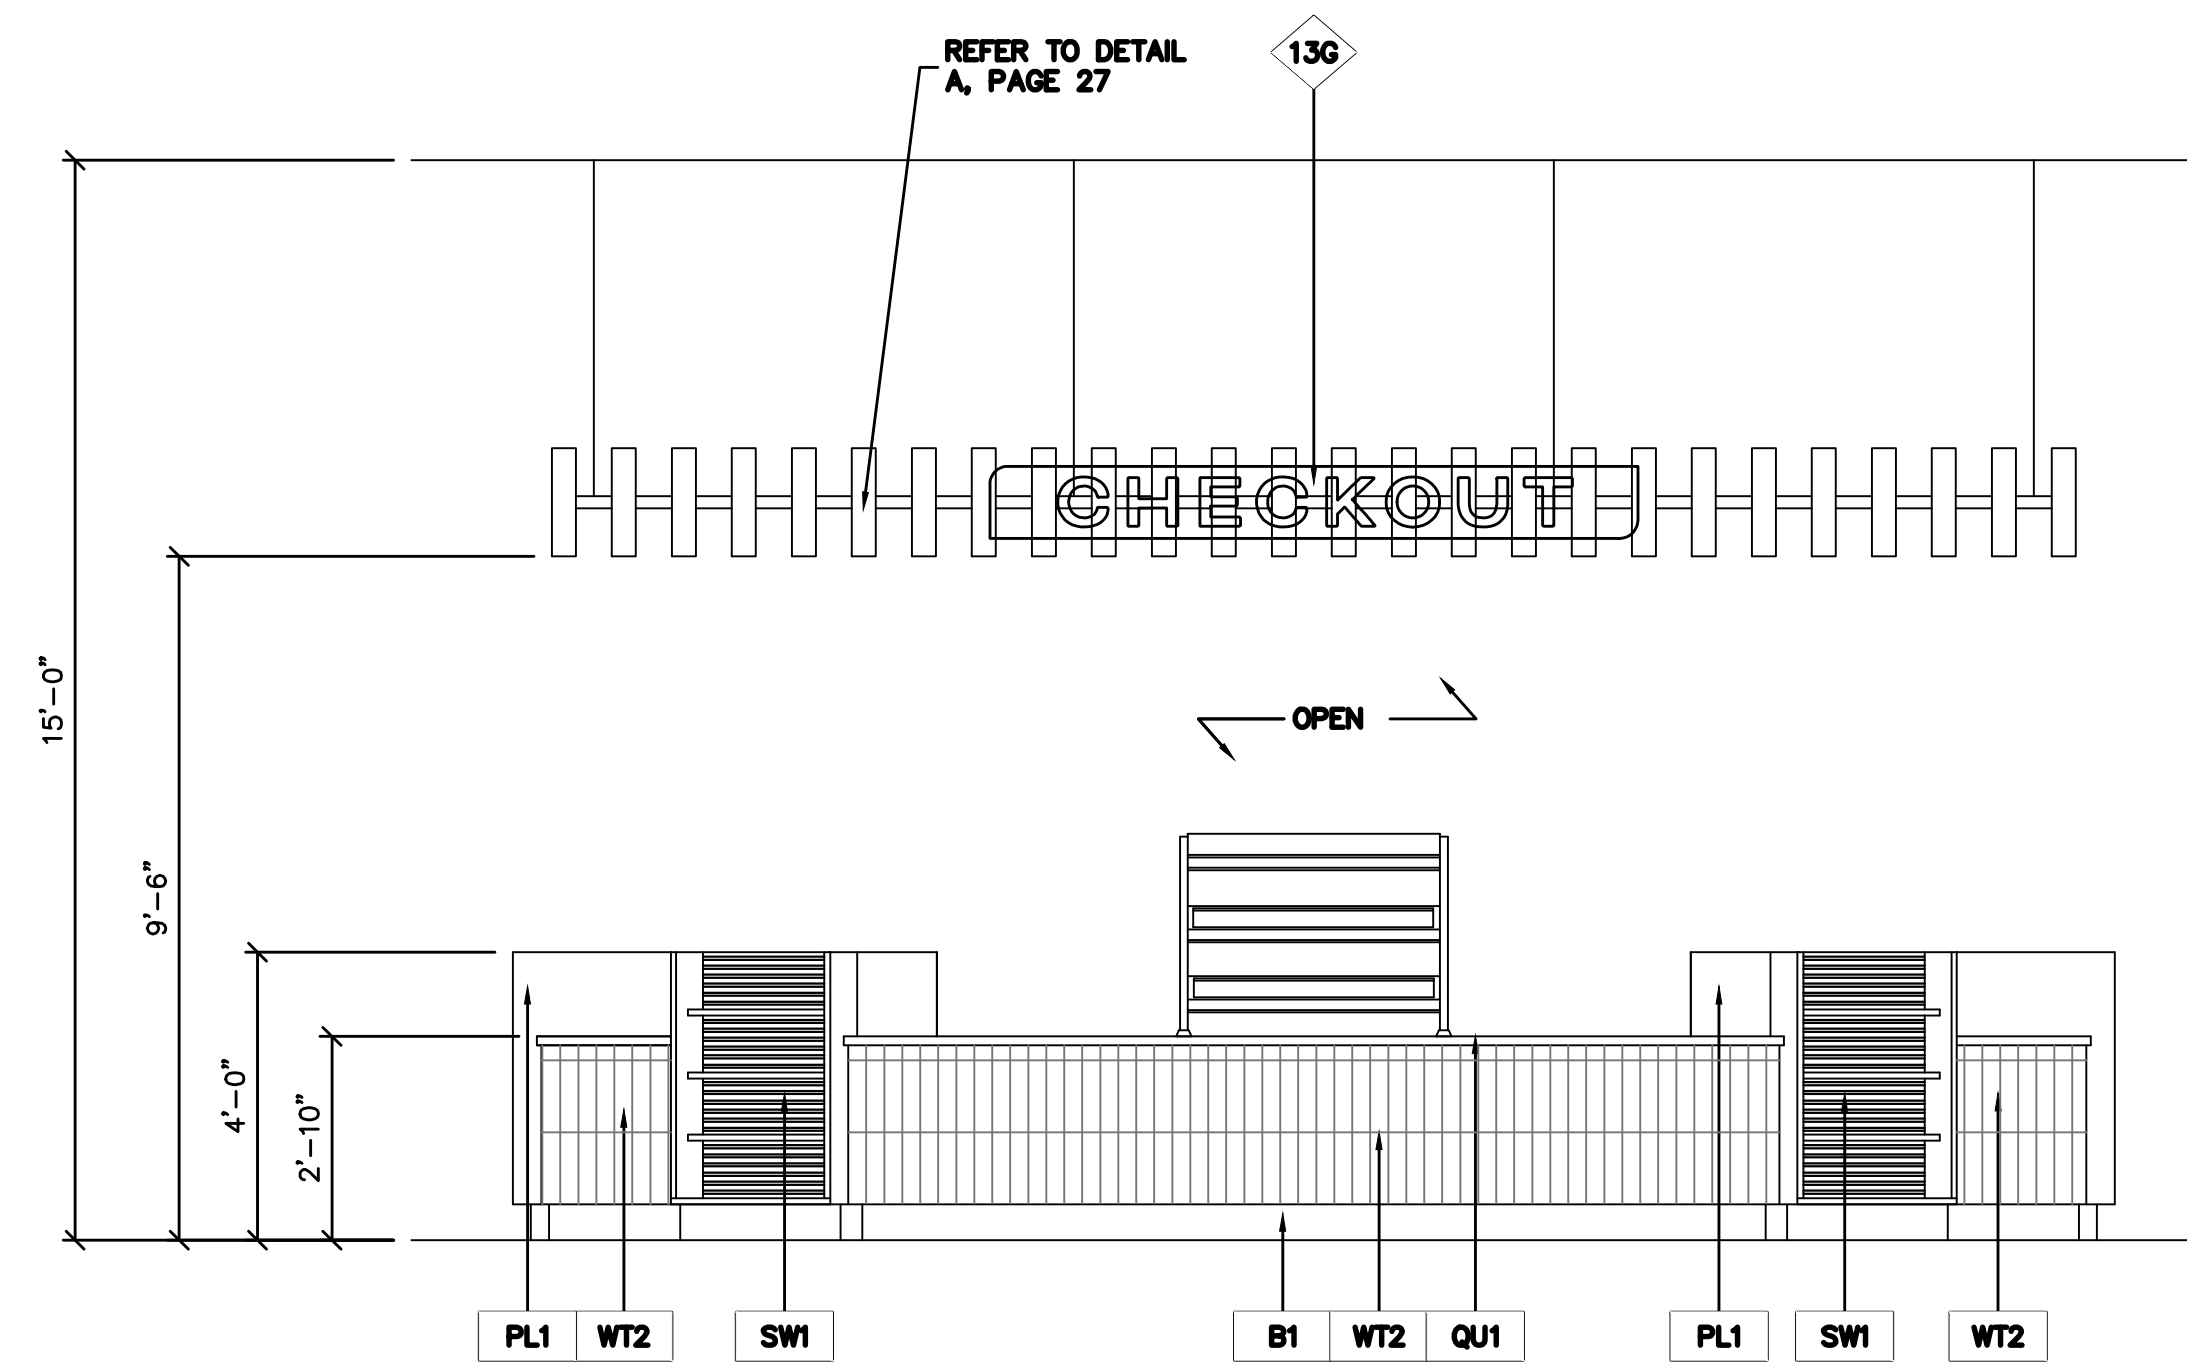





3
15
ELEVATION - CASHIER - FRONT










STROUD
AND COMPANY







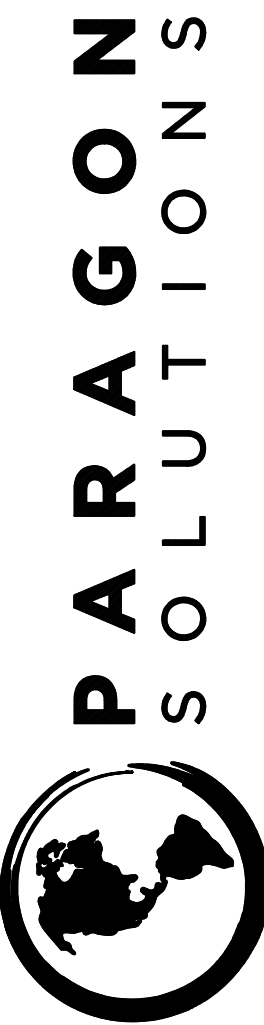



201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-827-7171

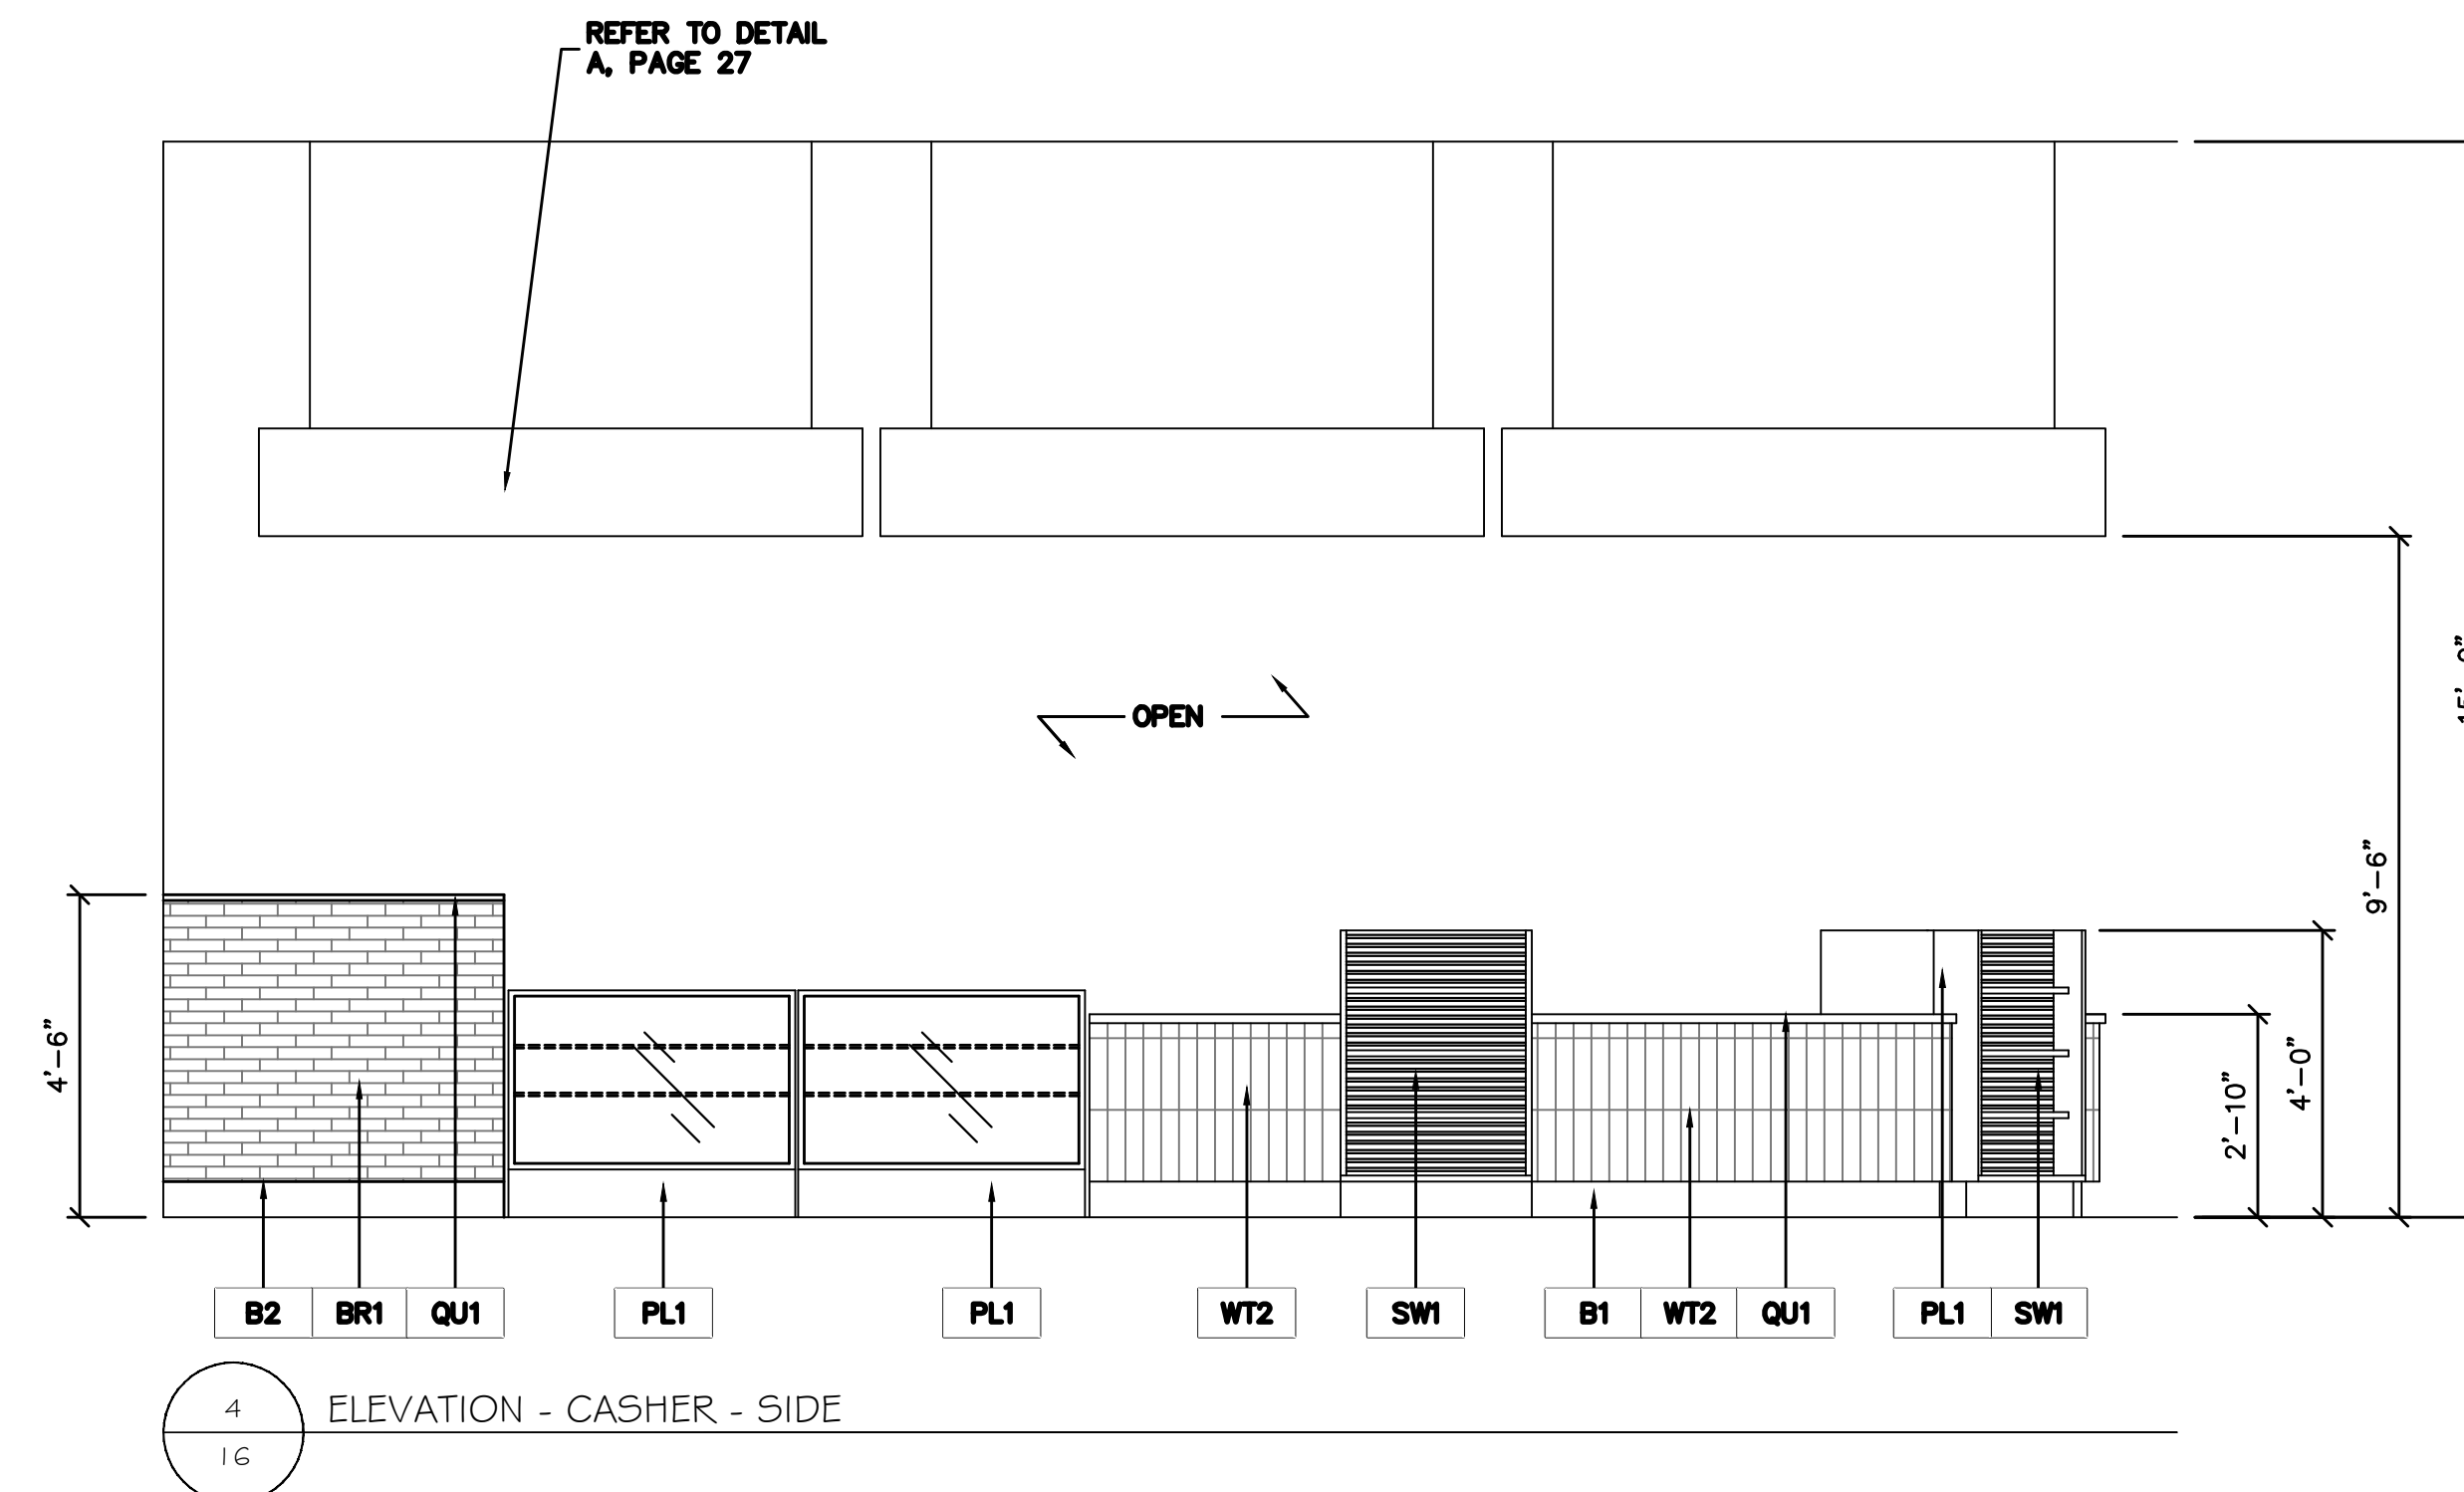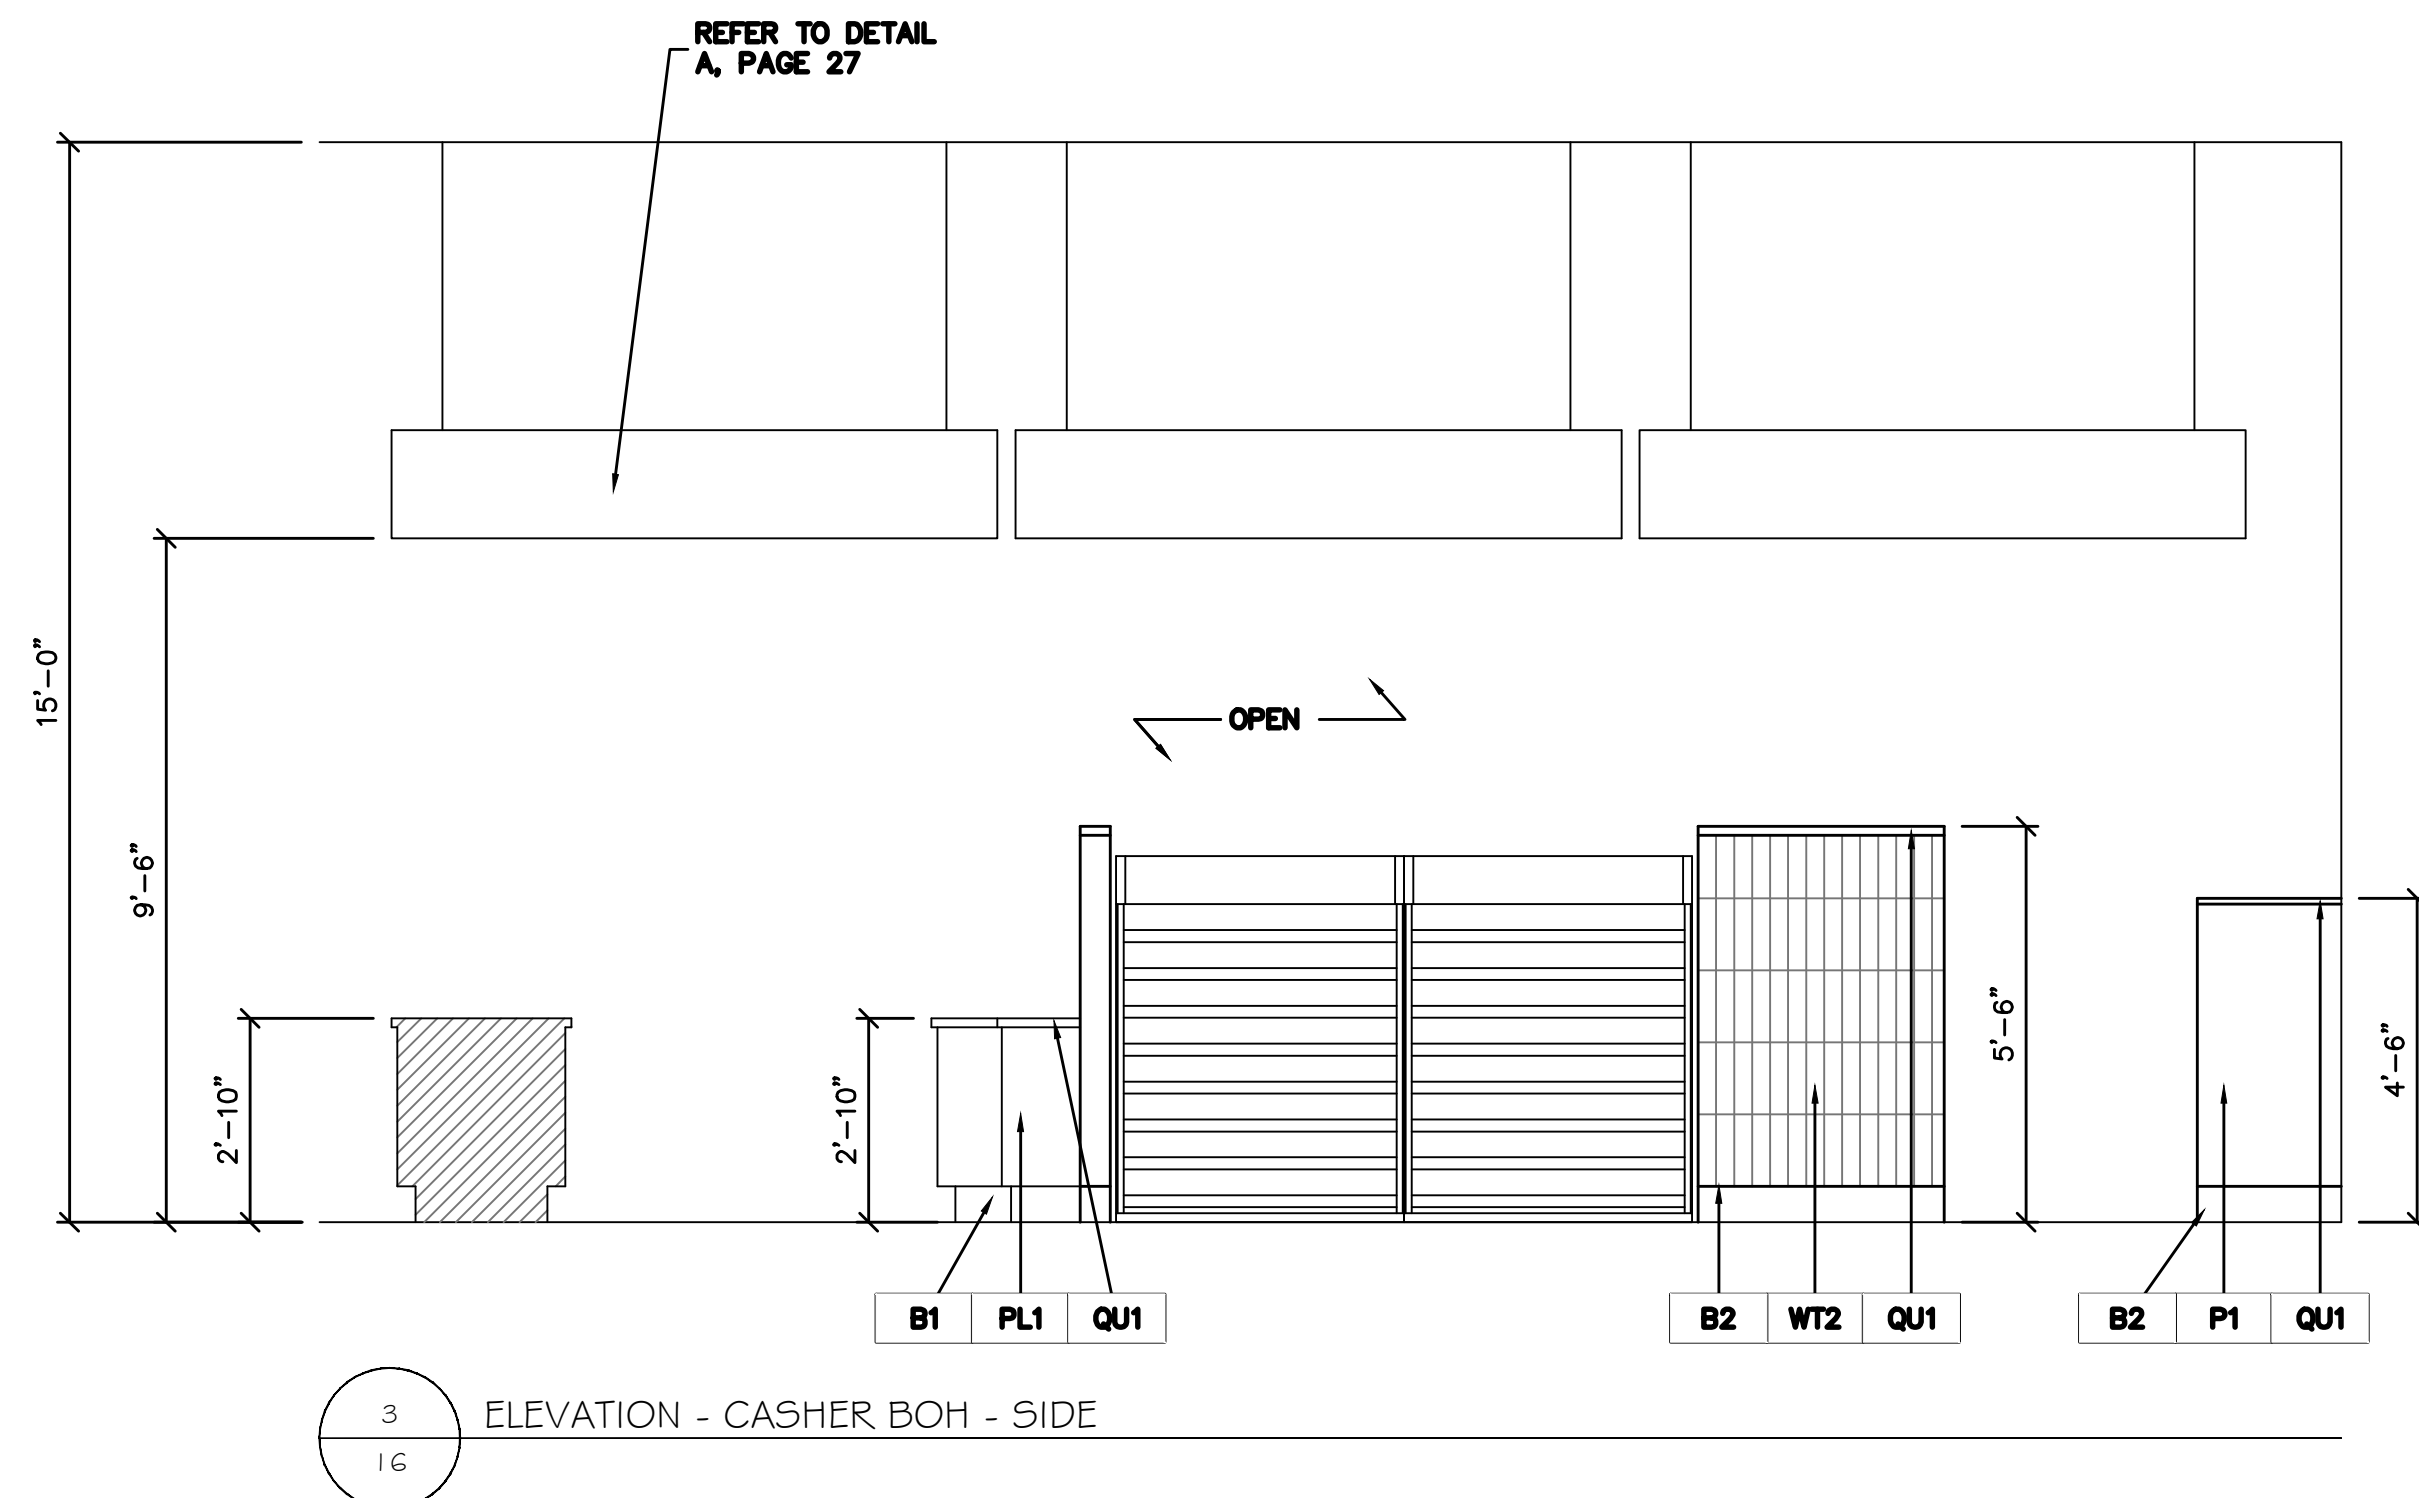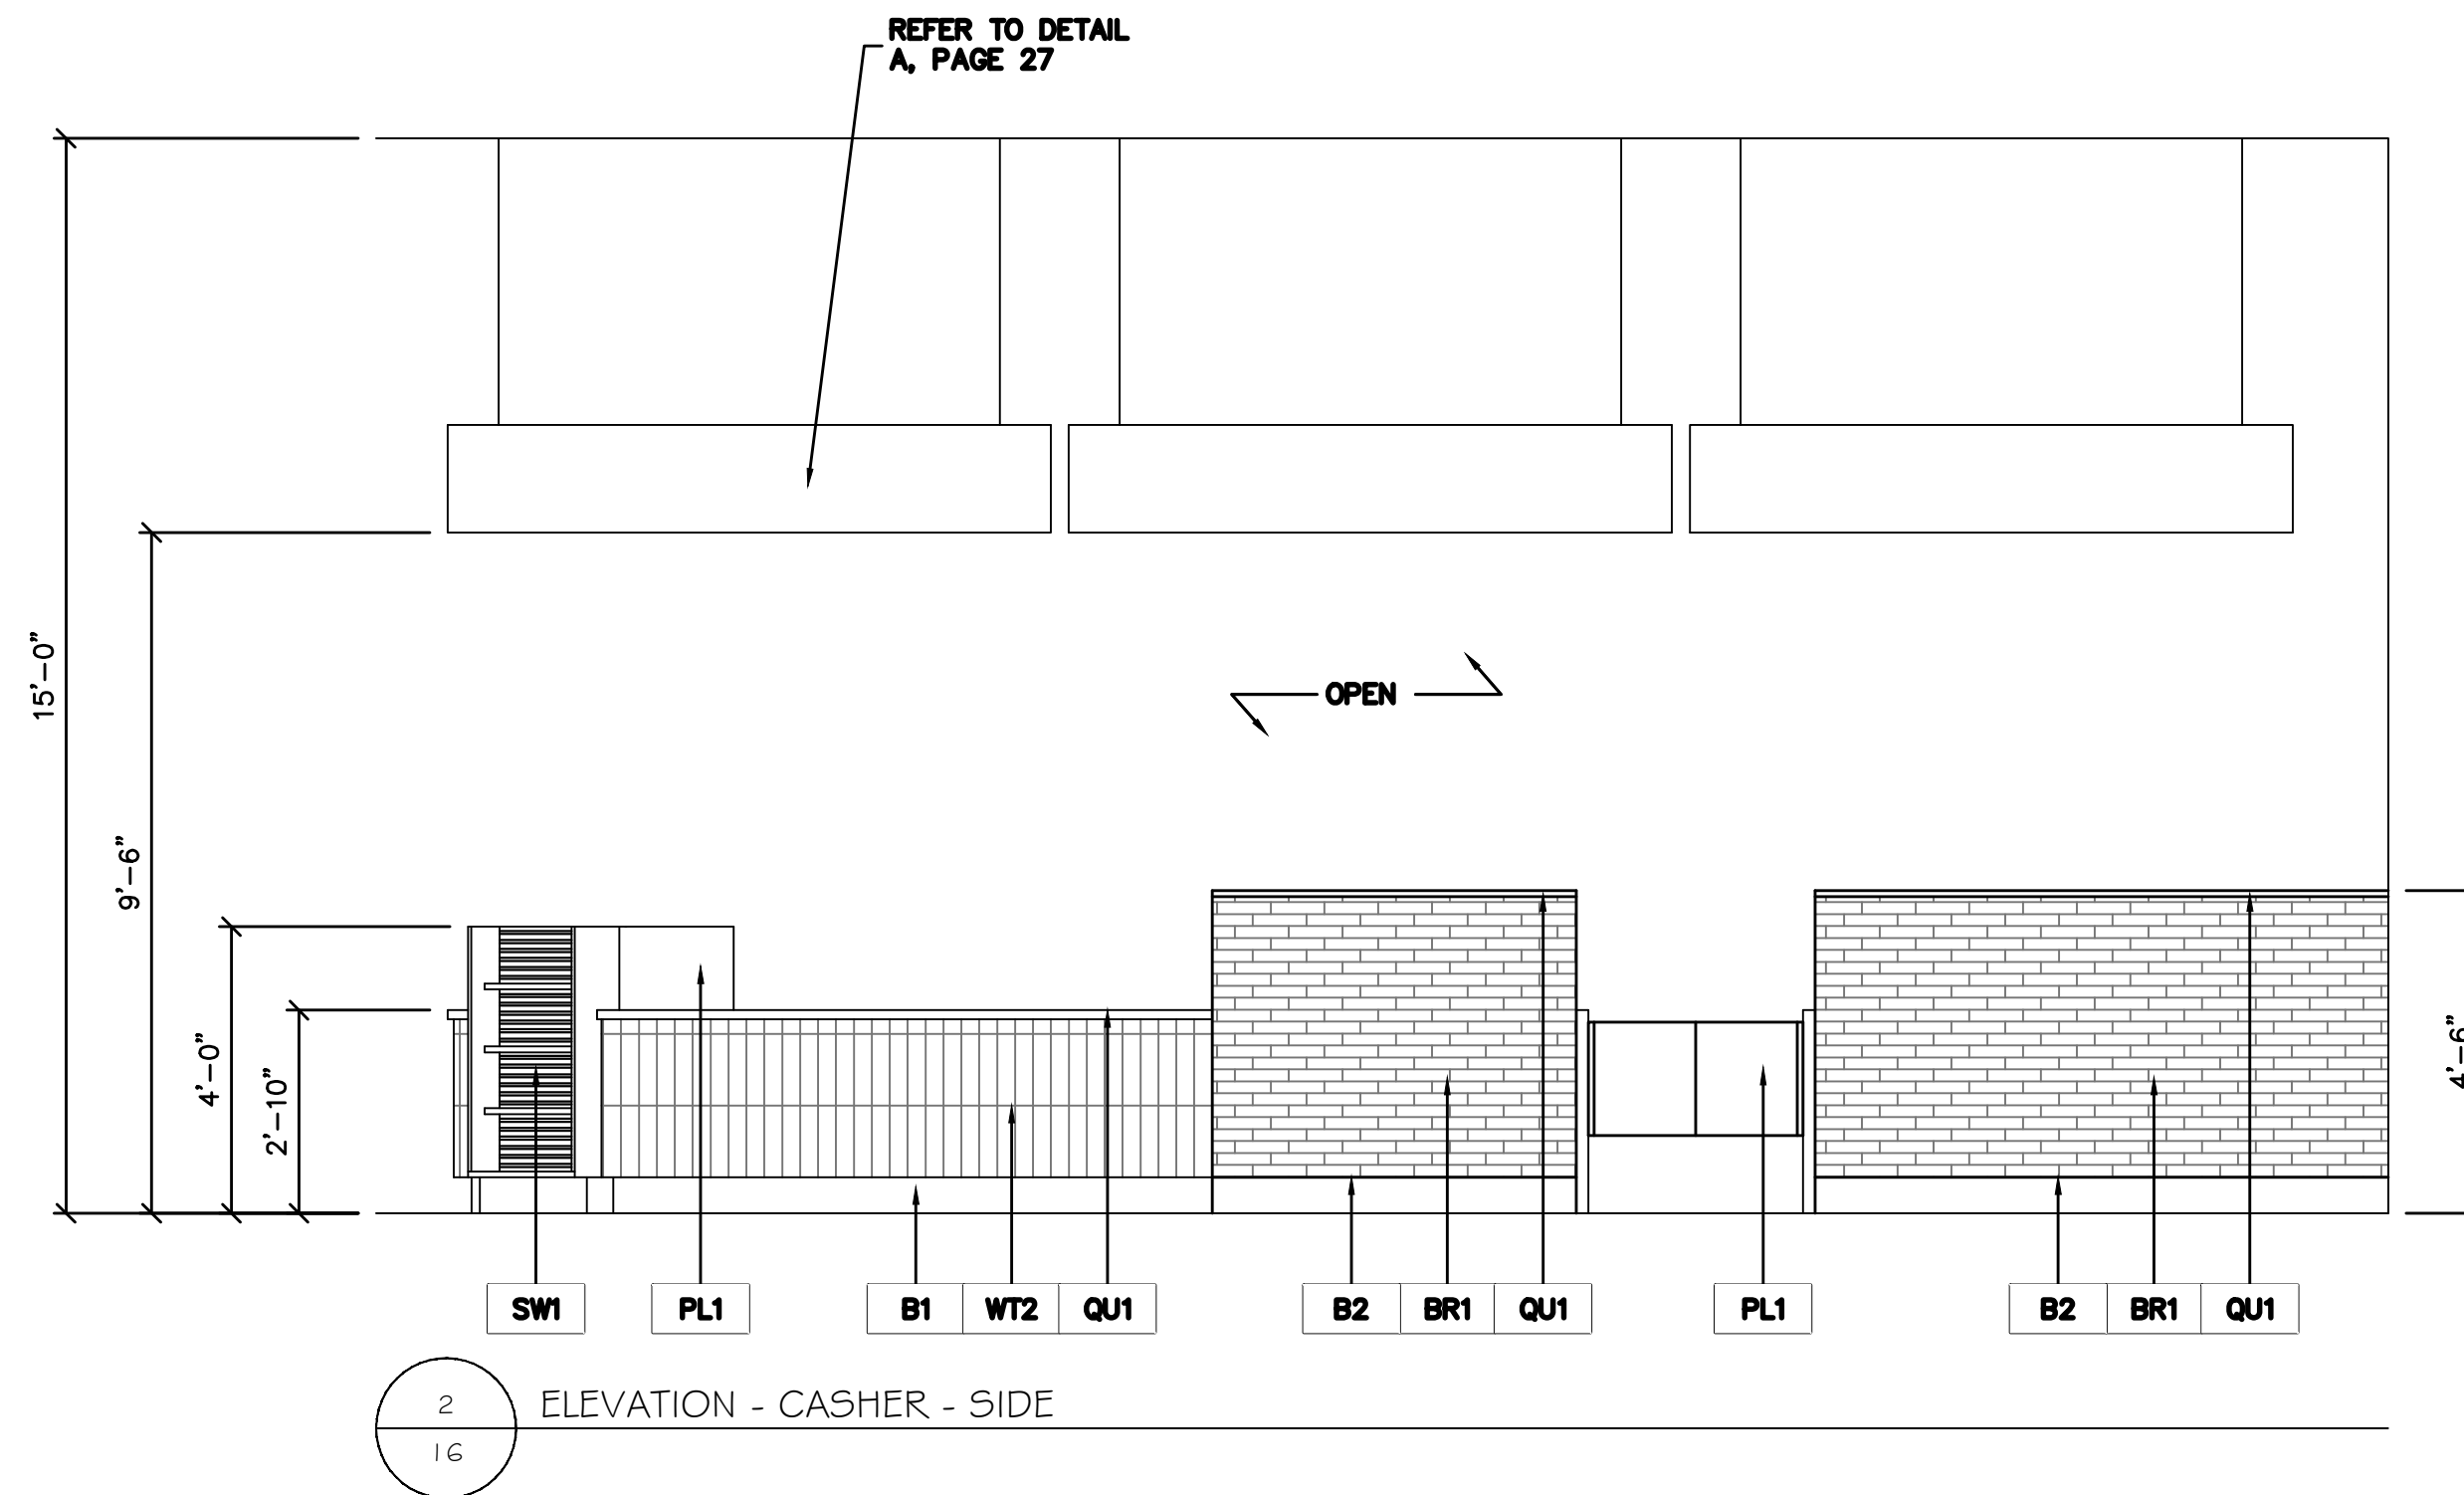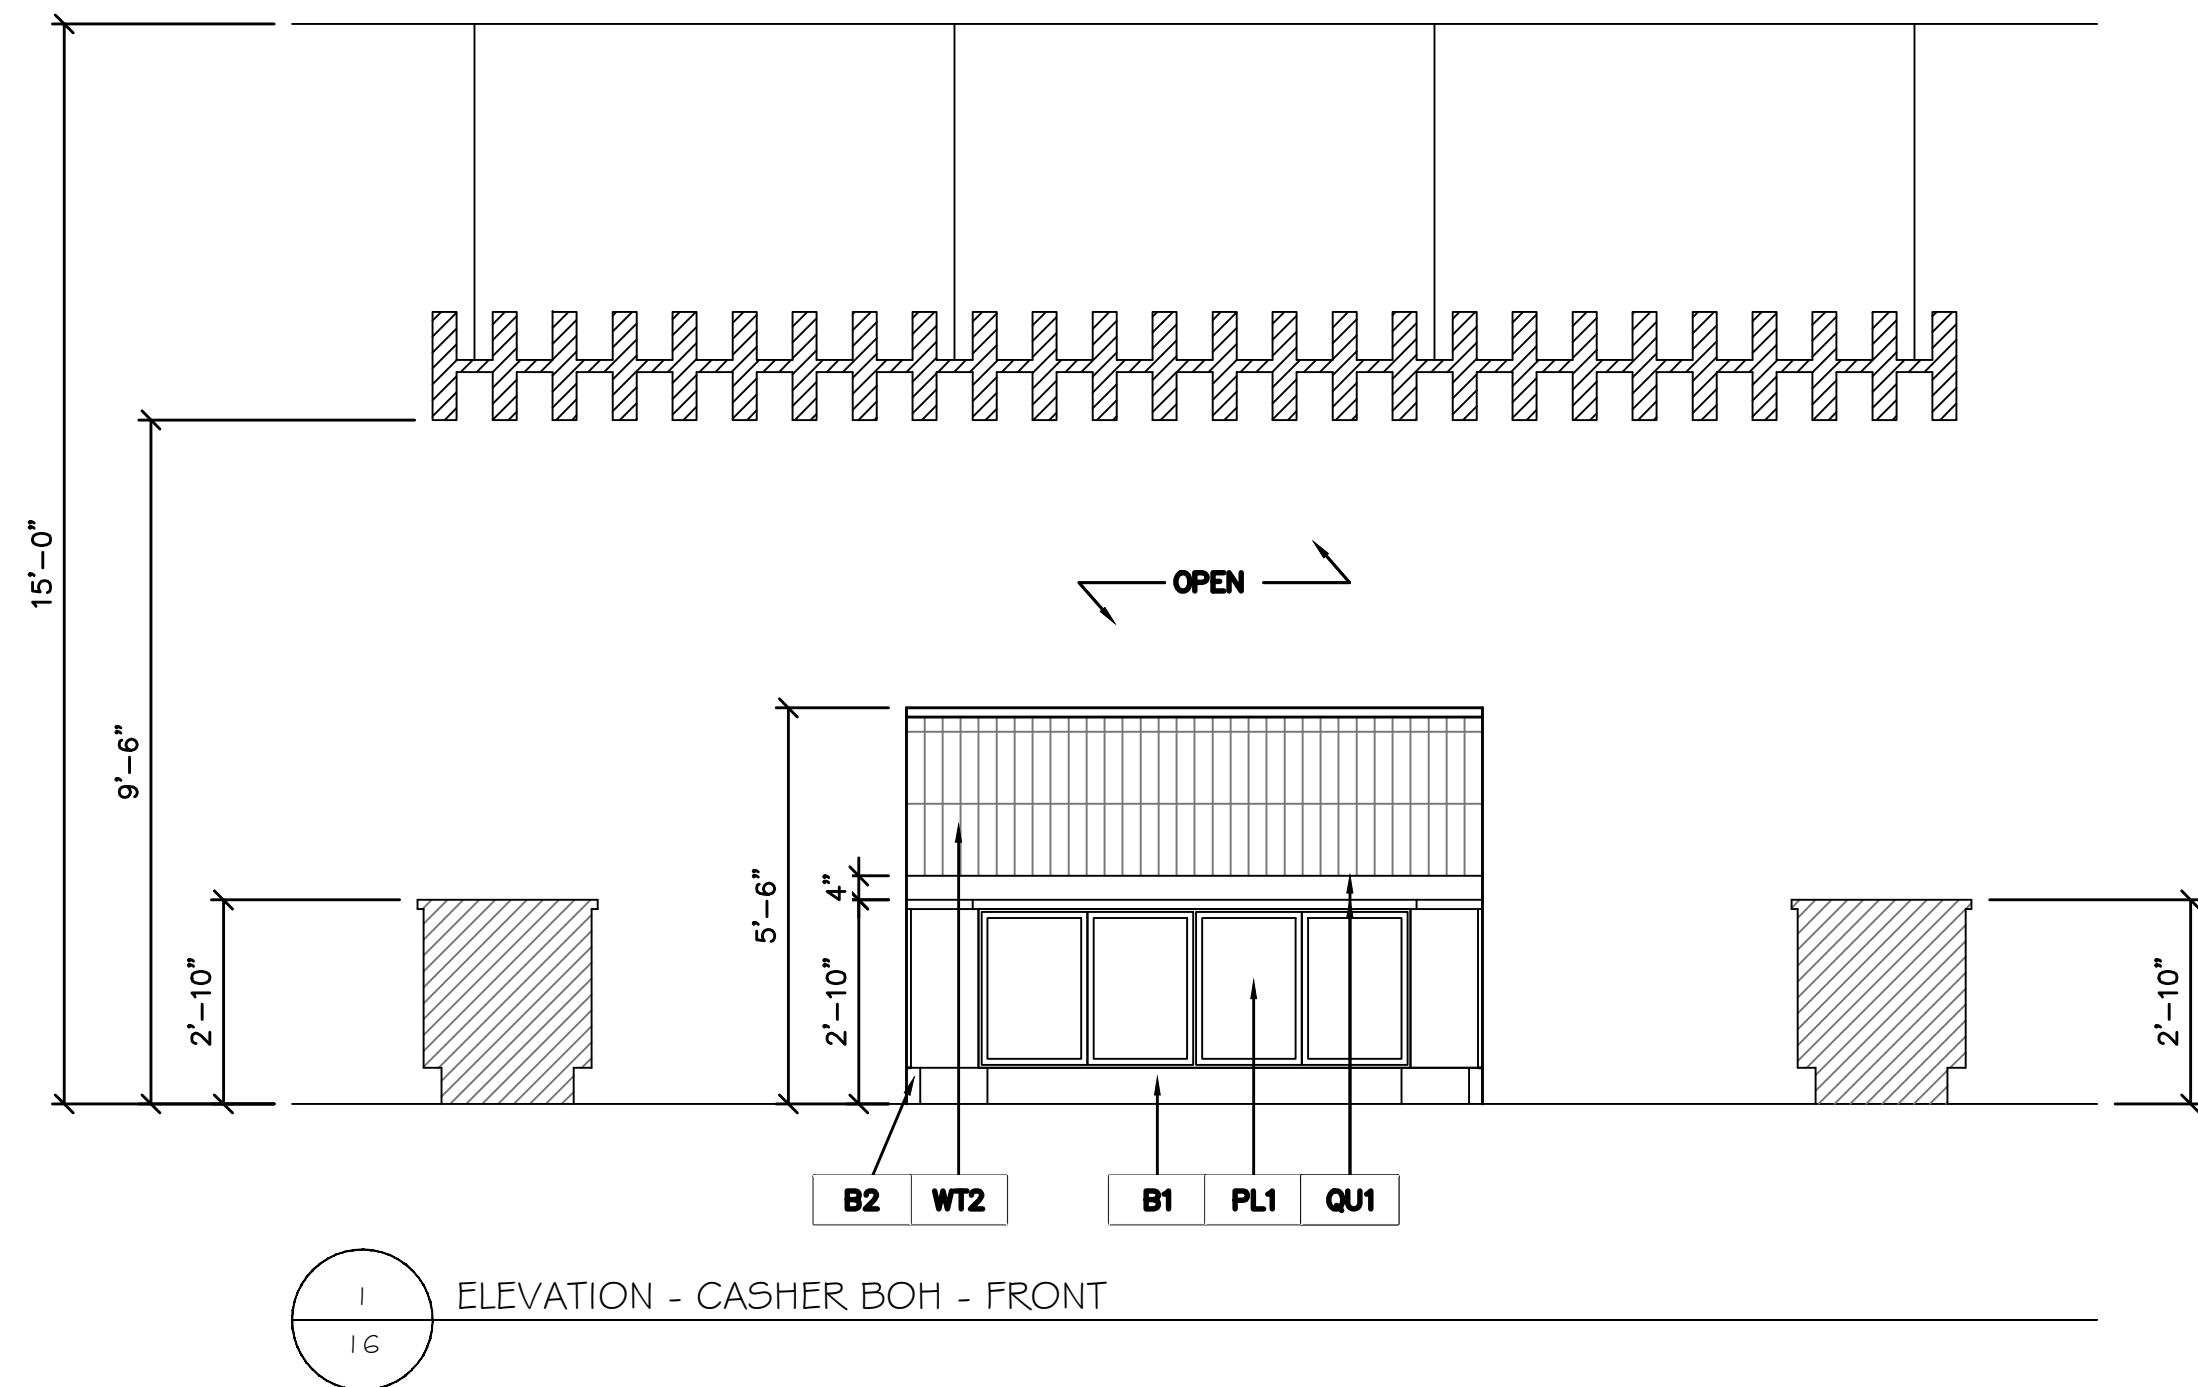

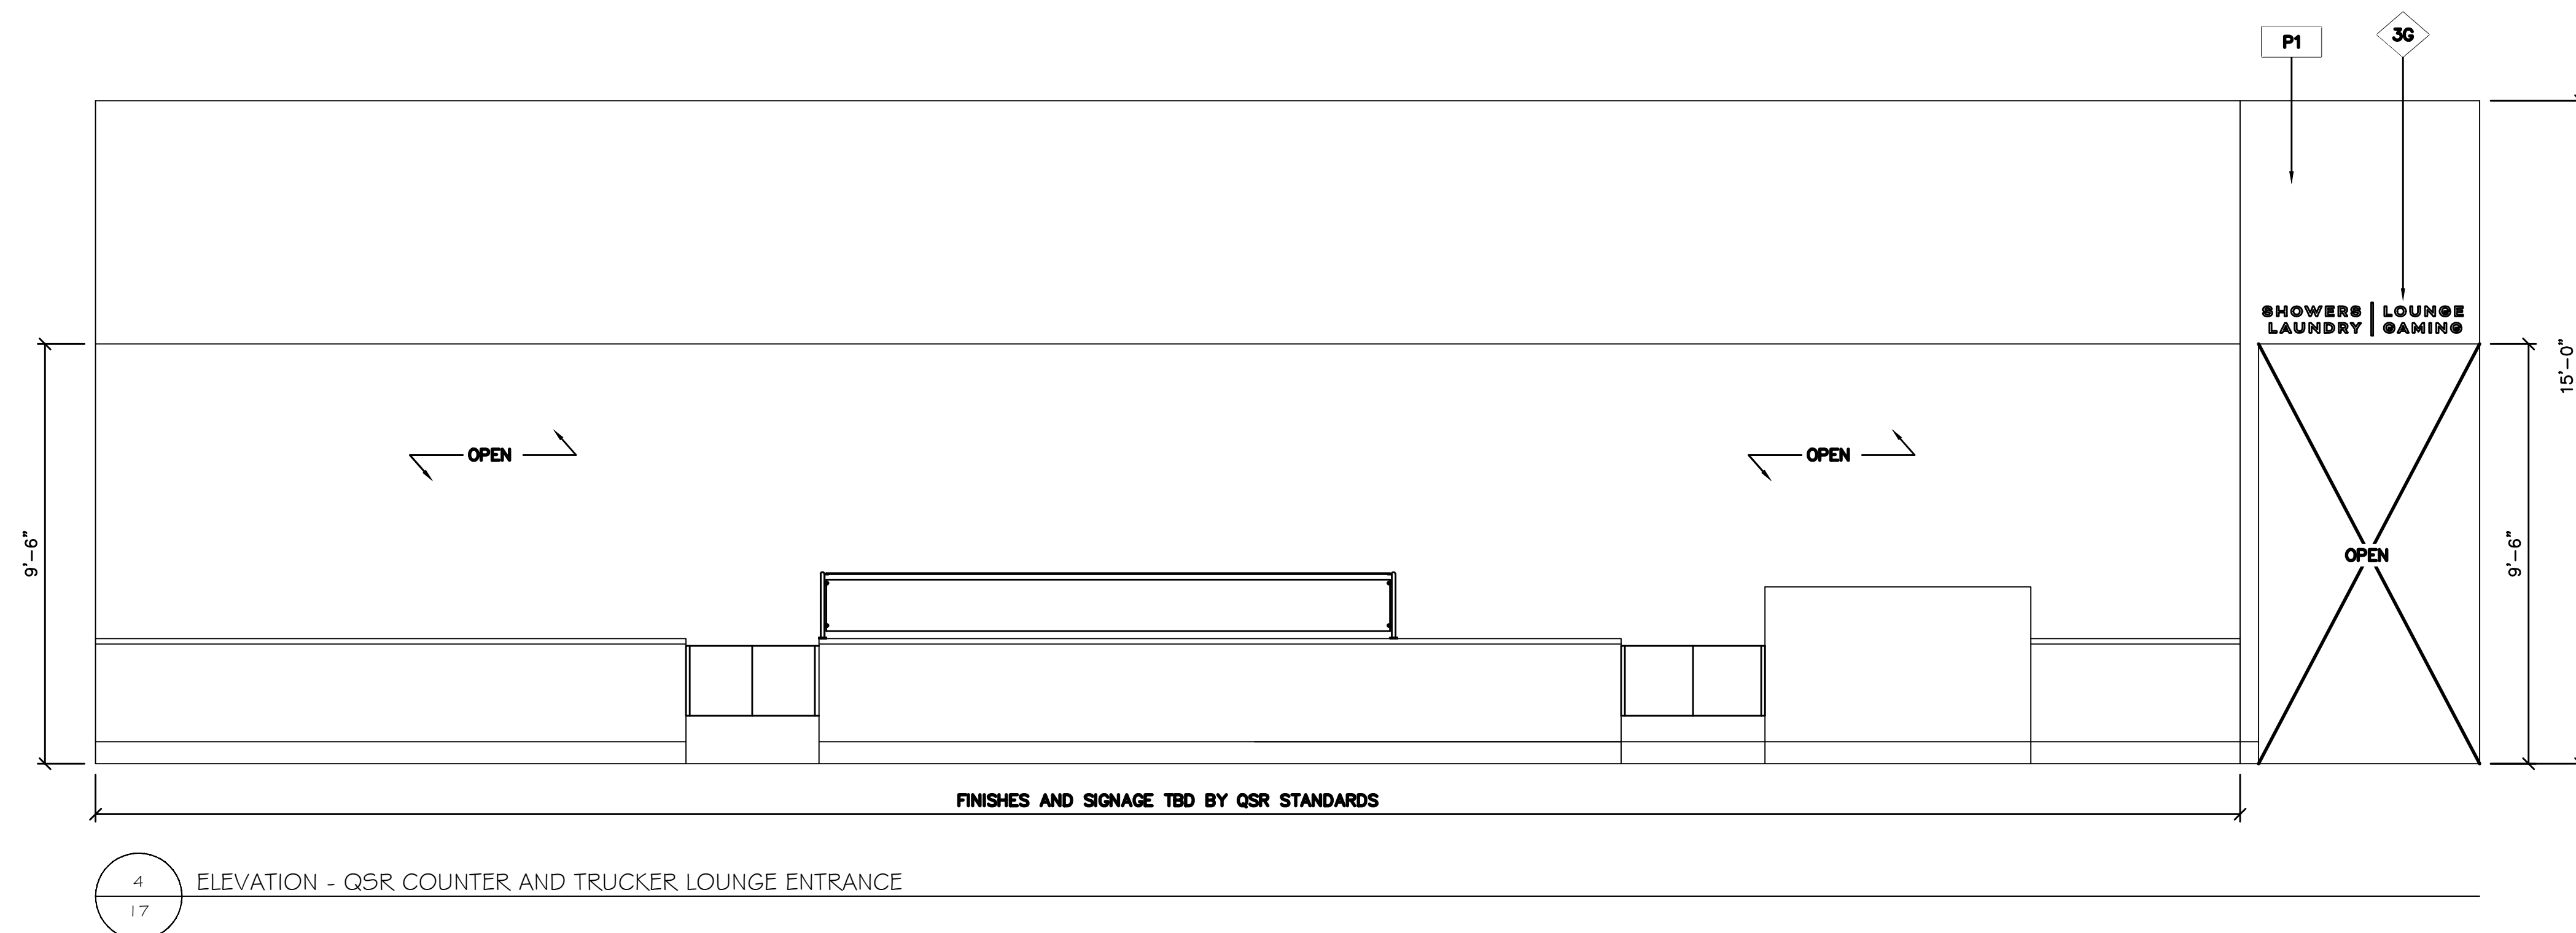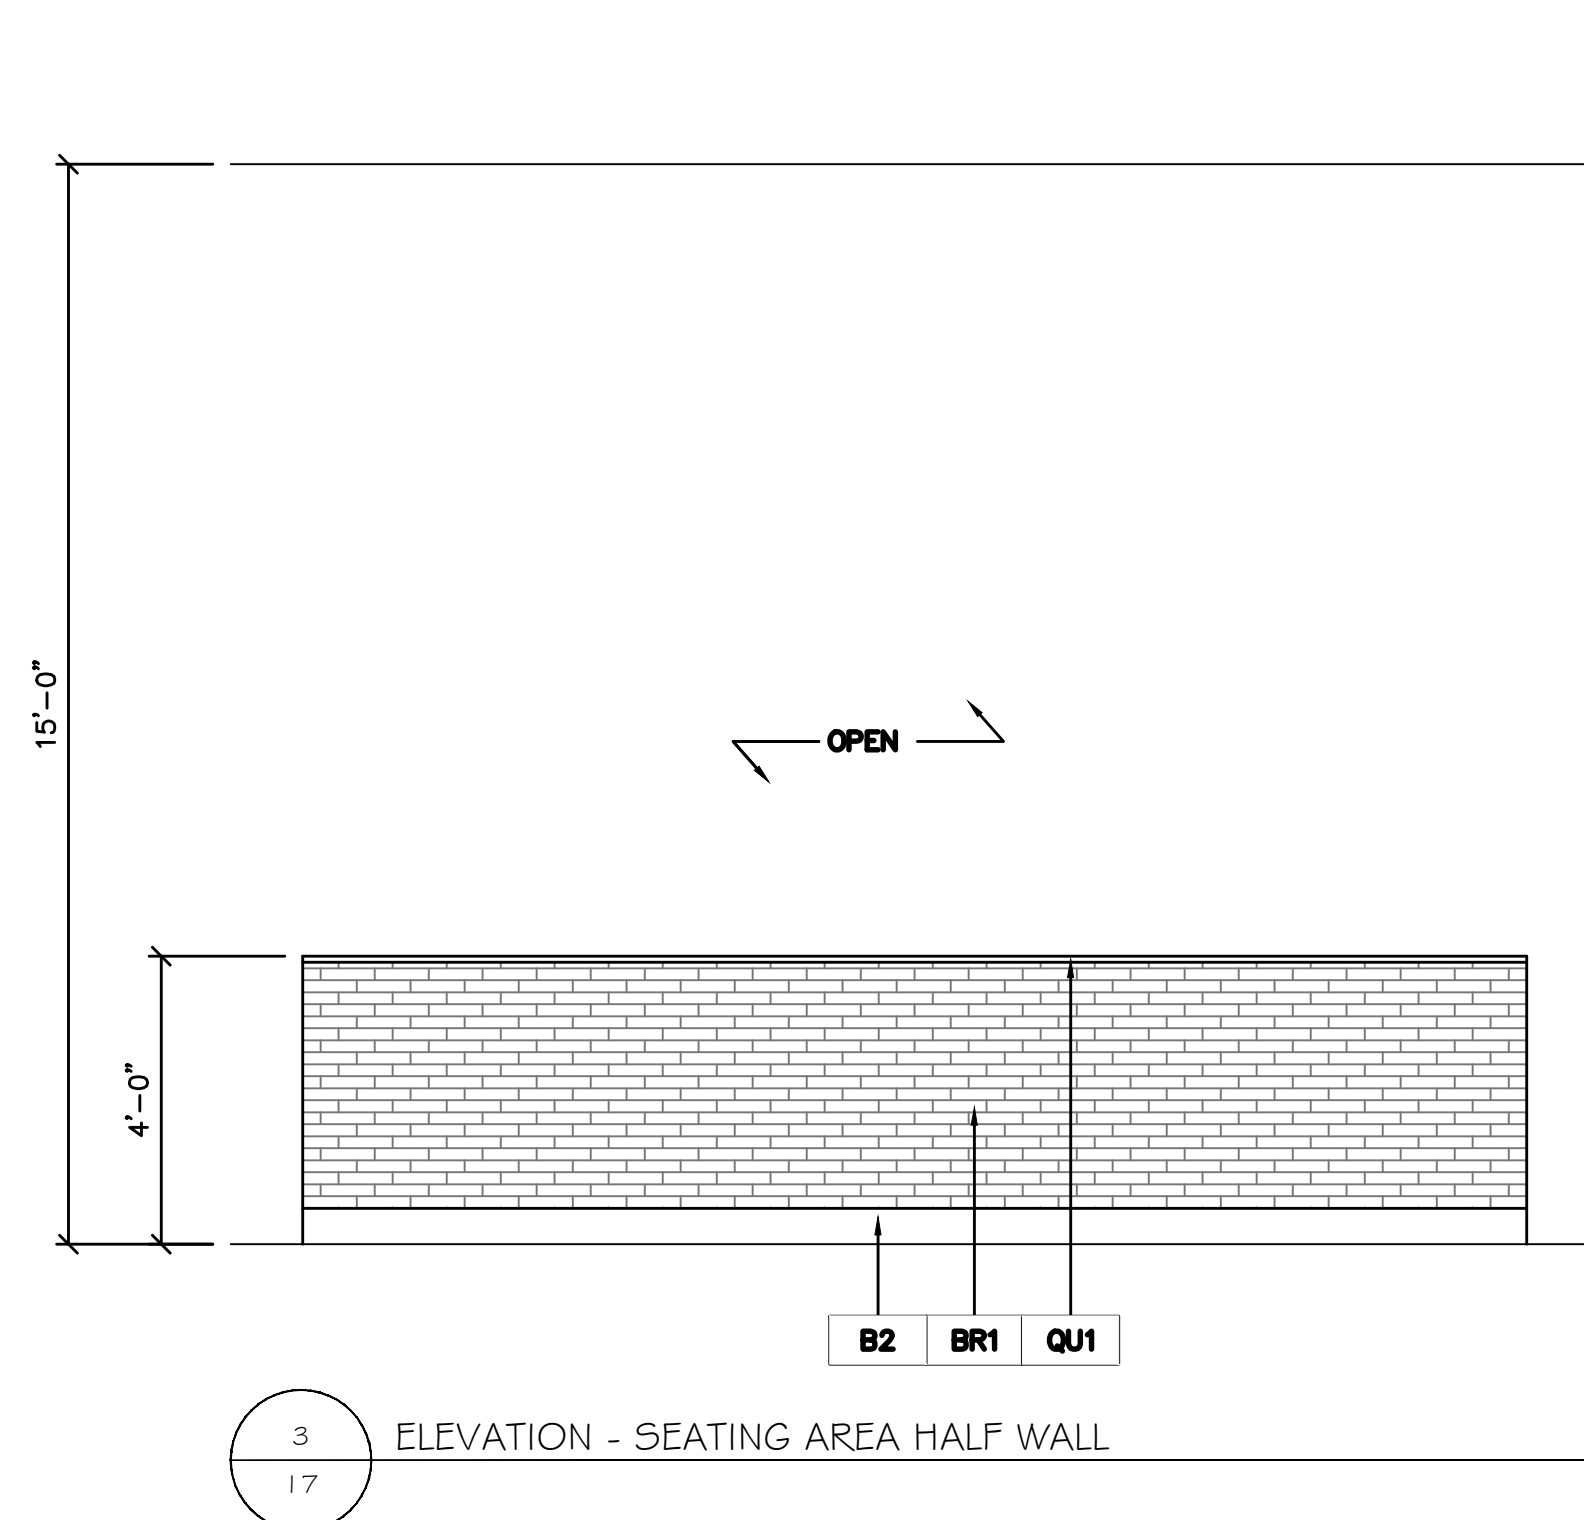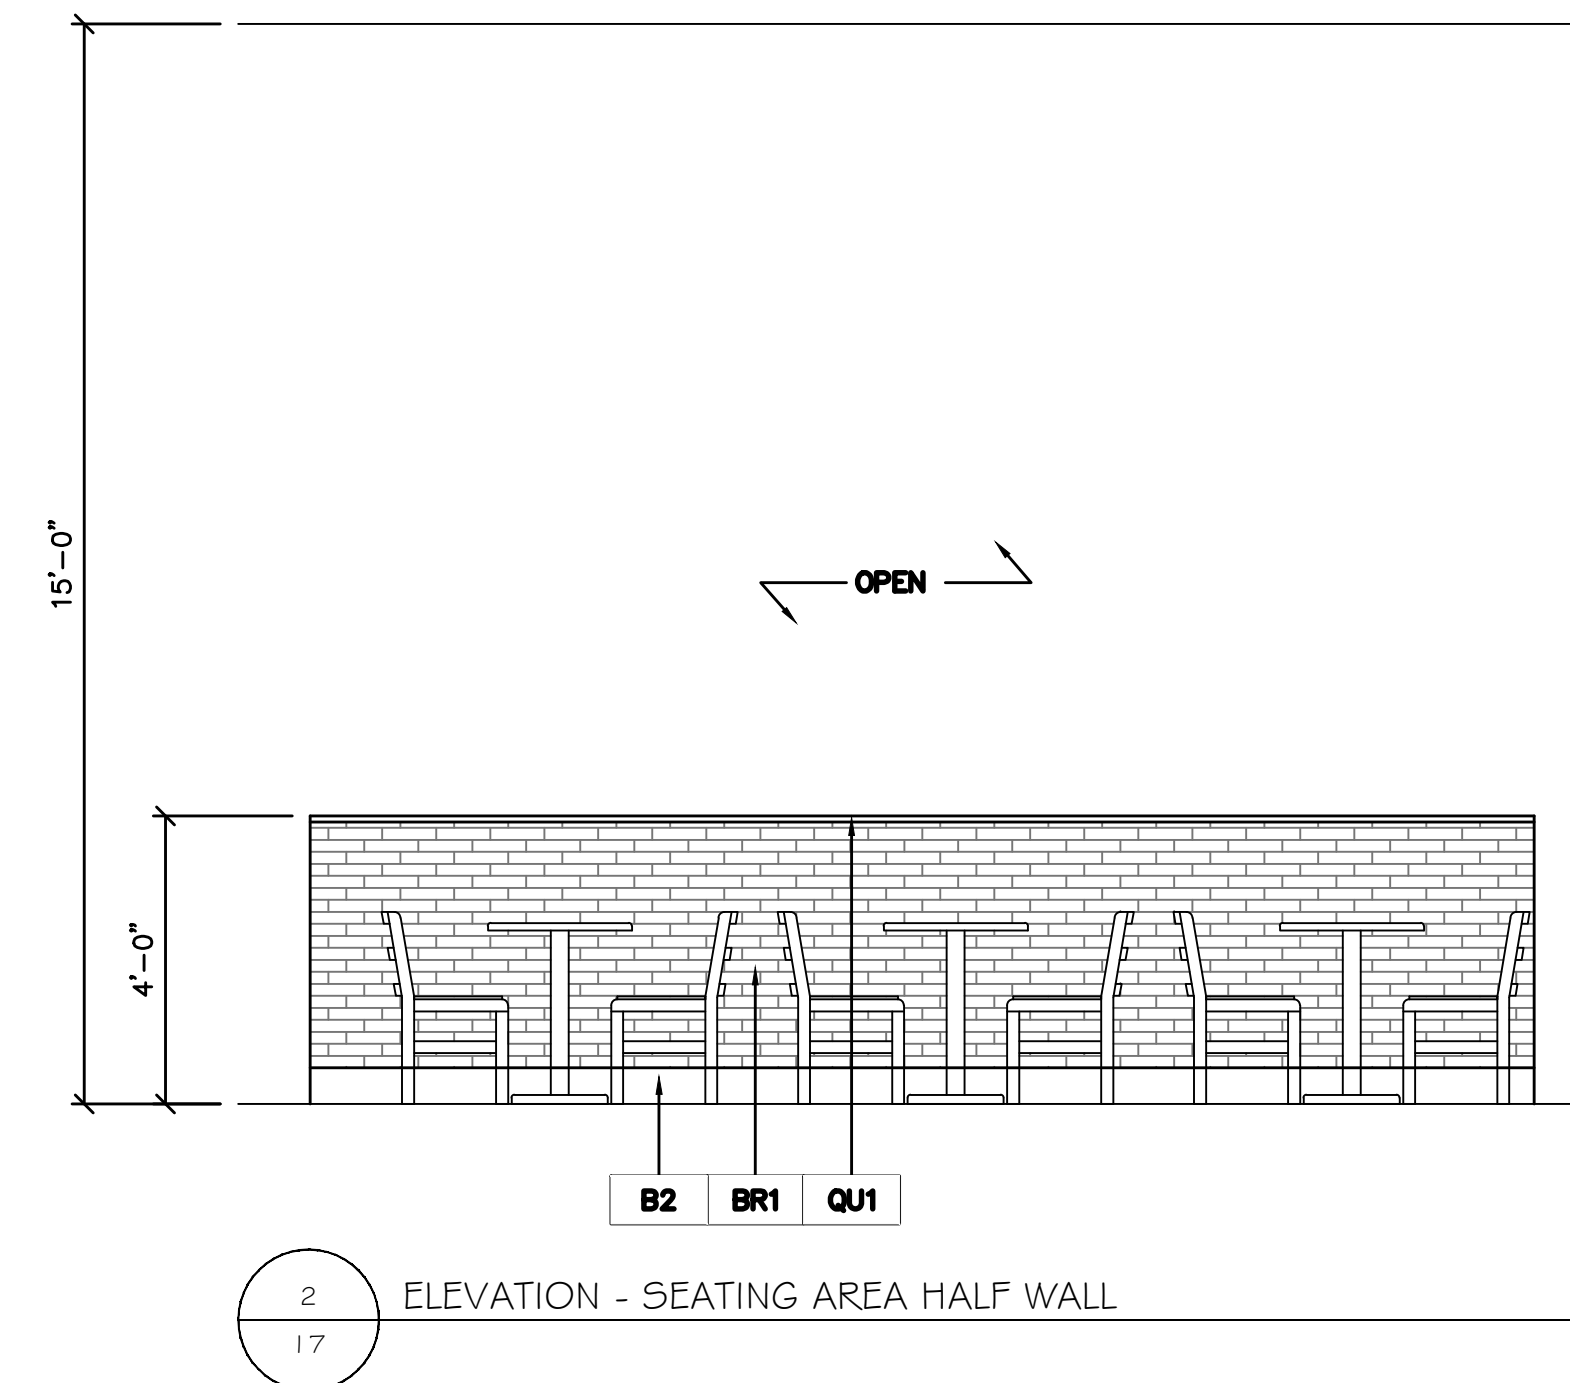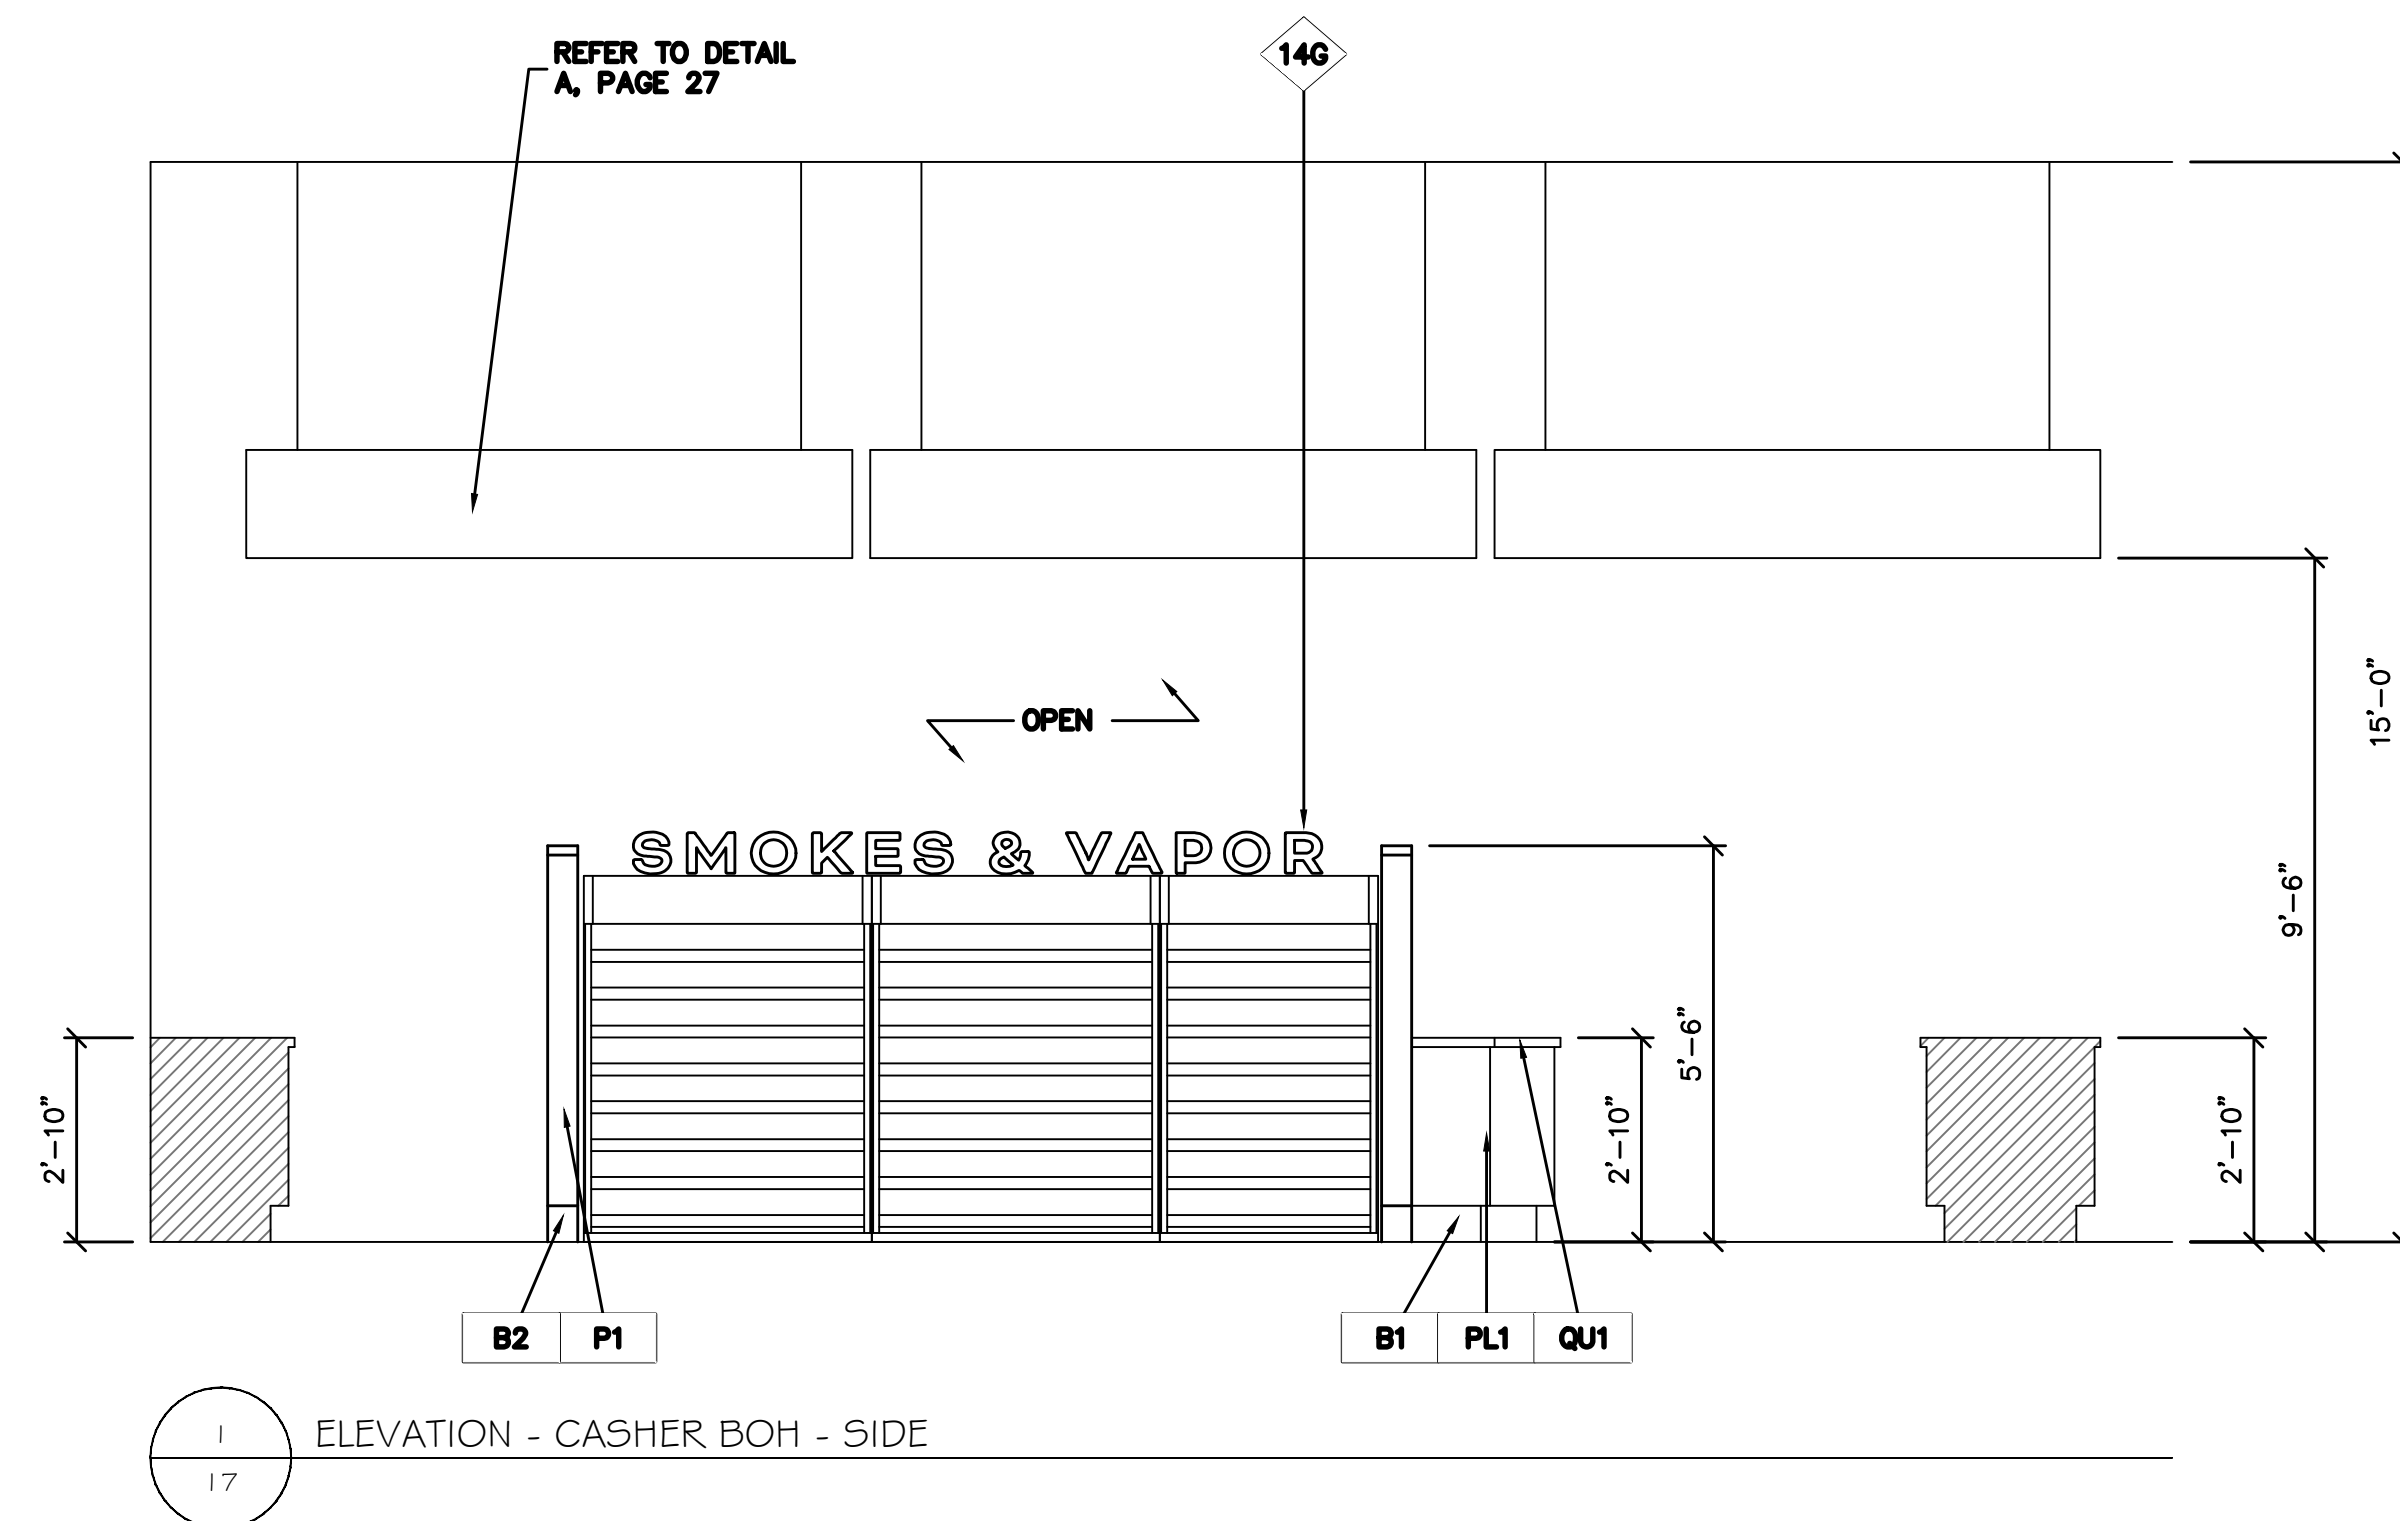


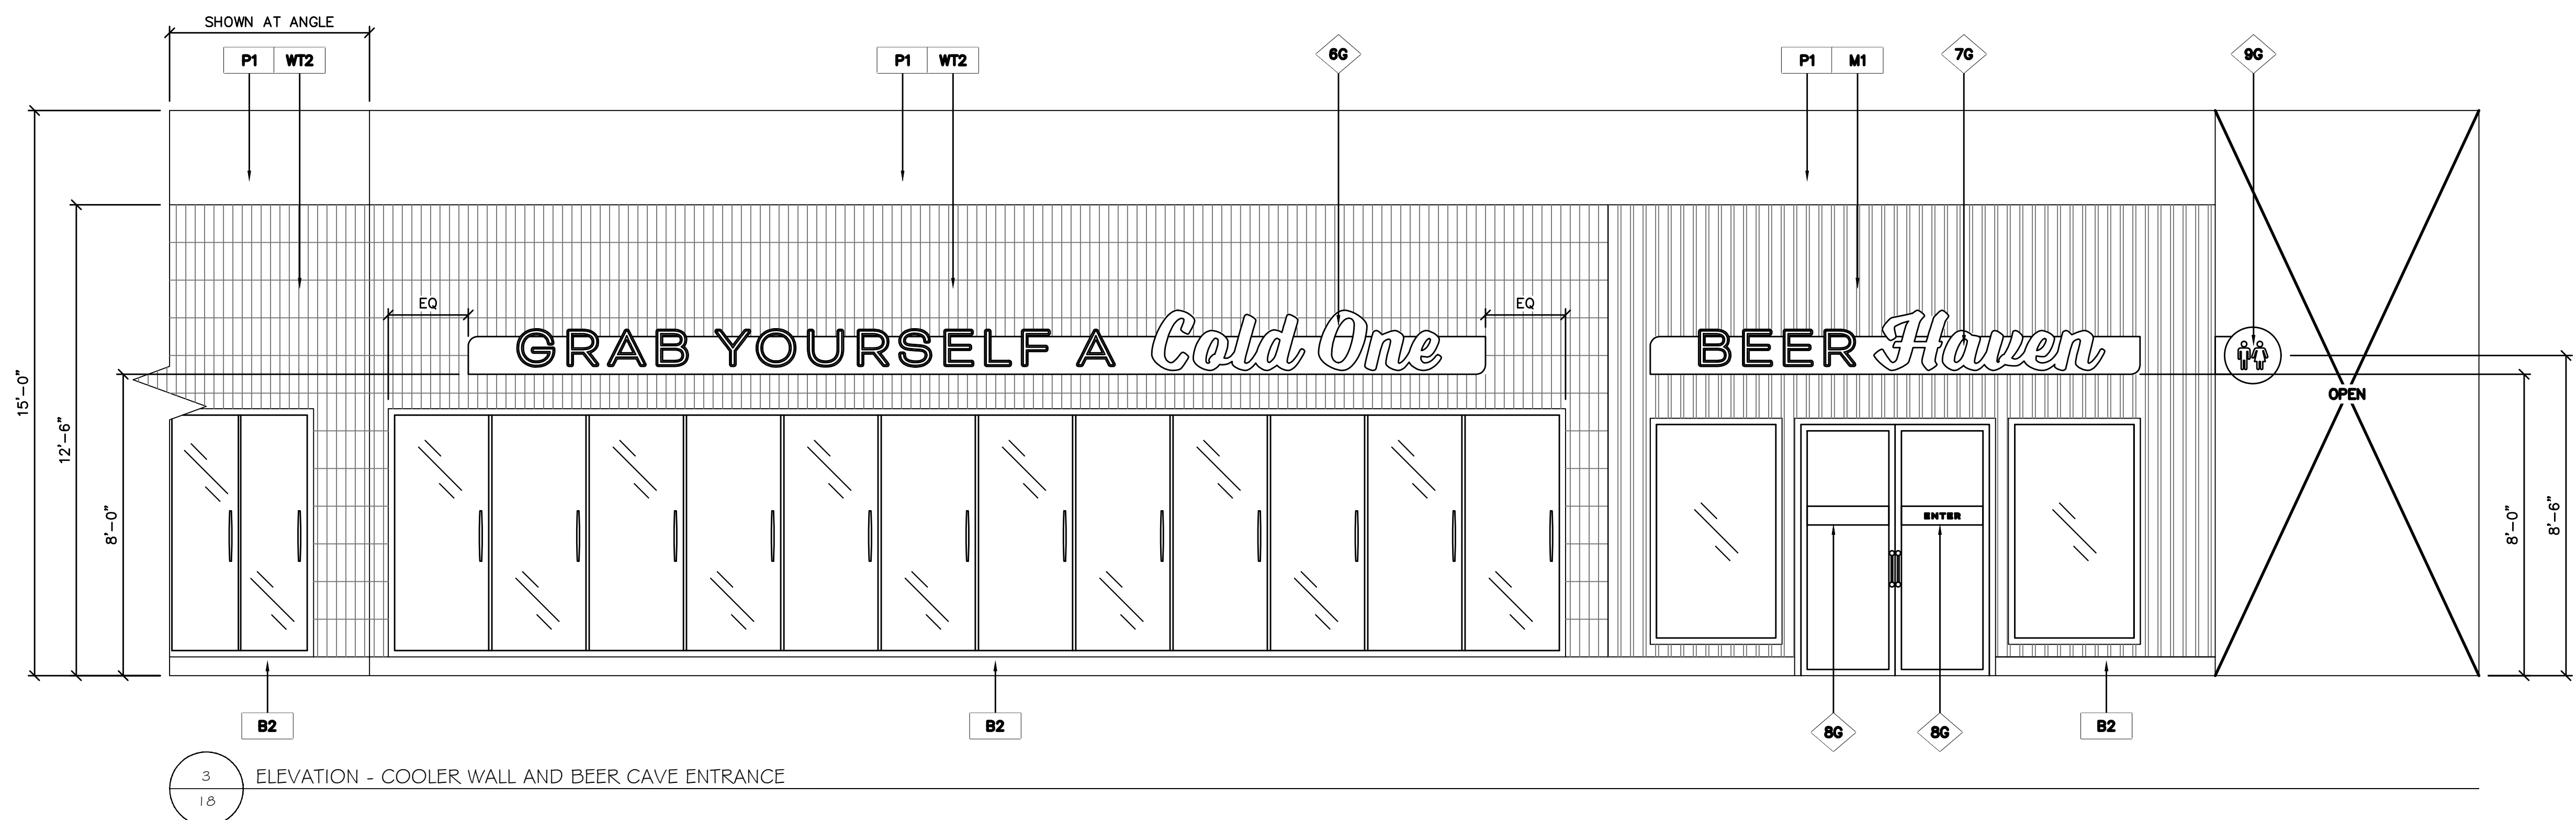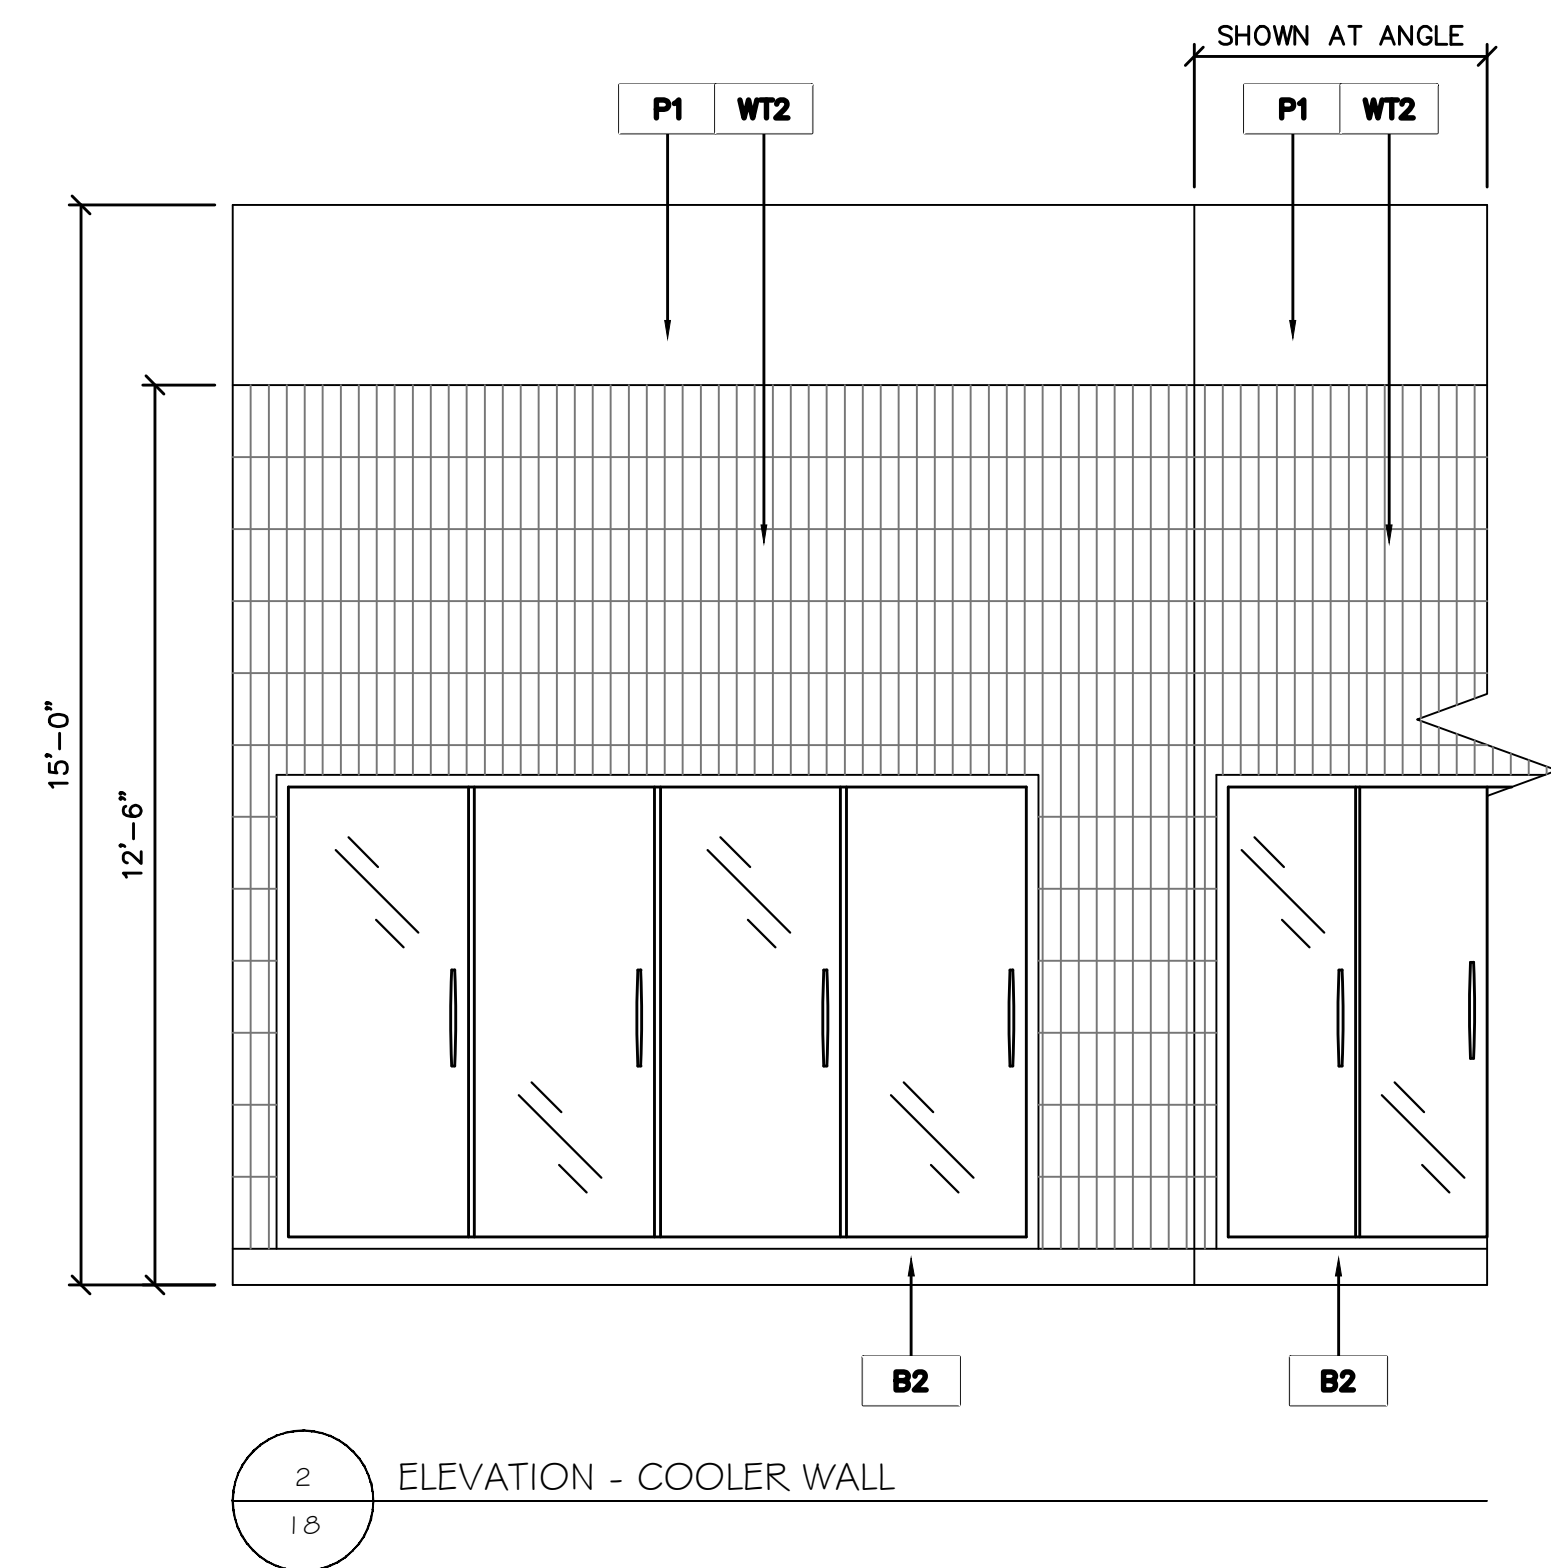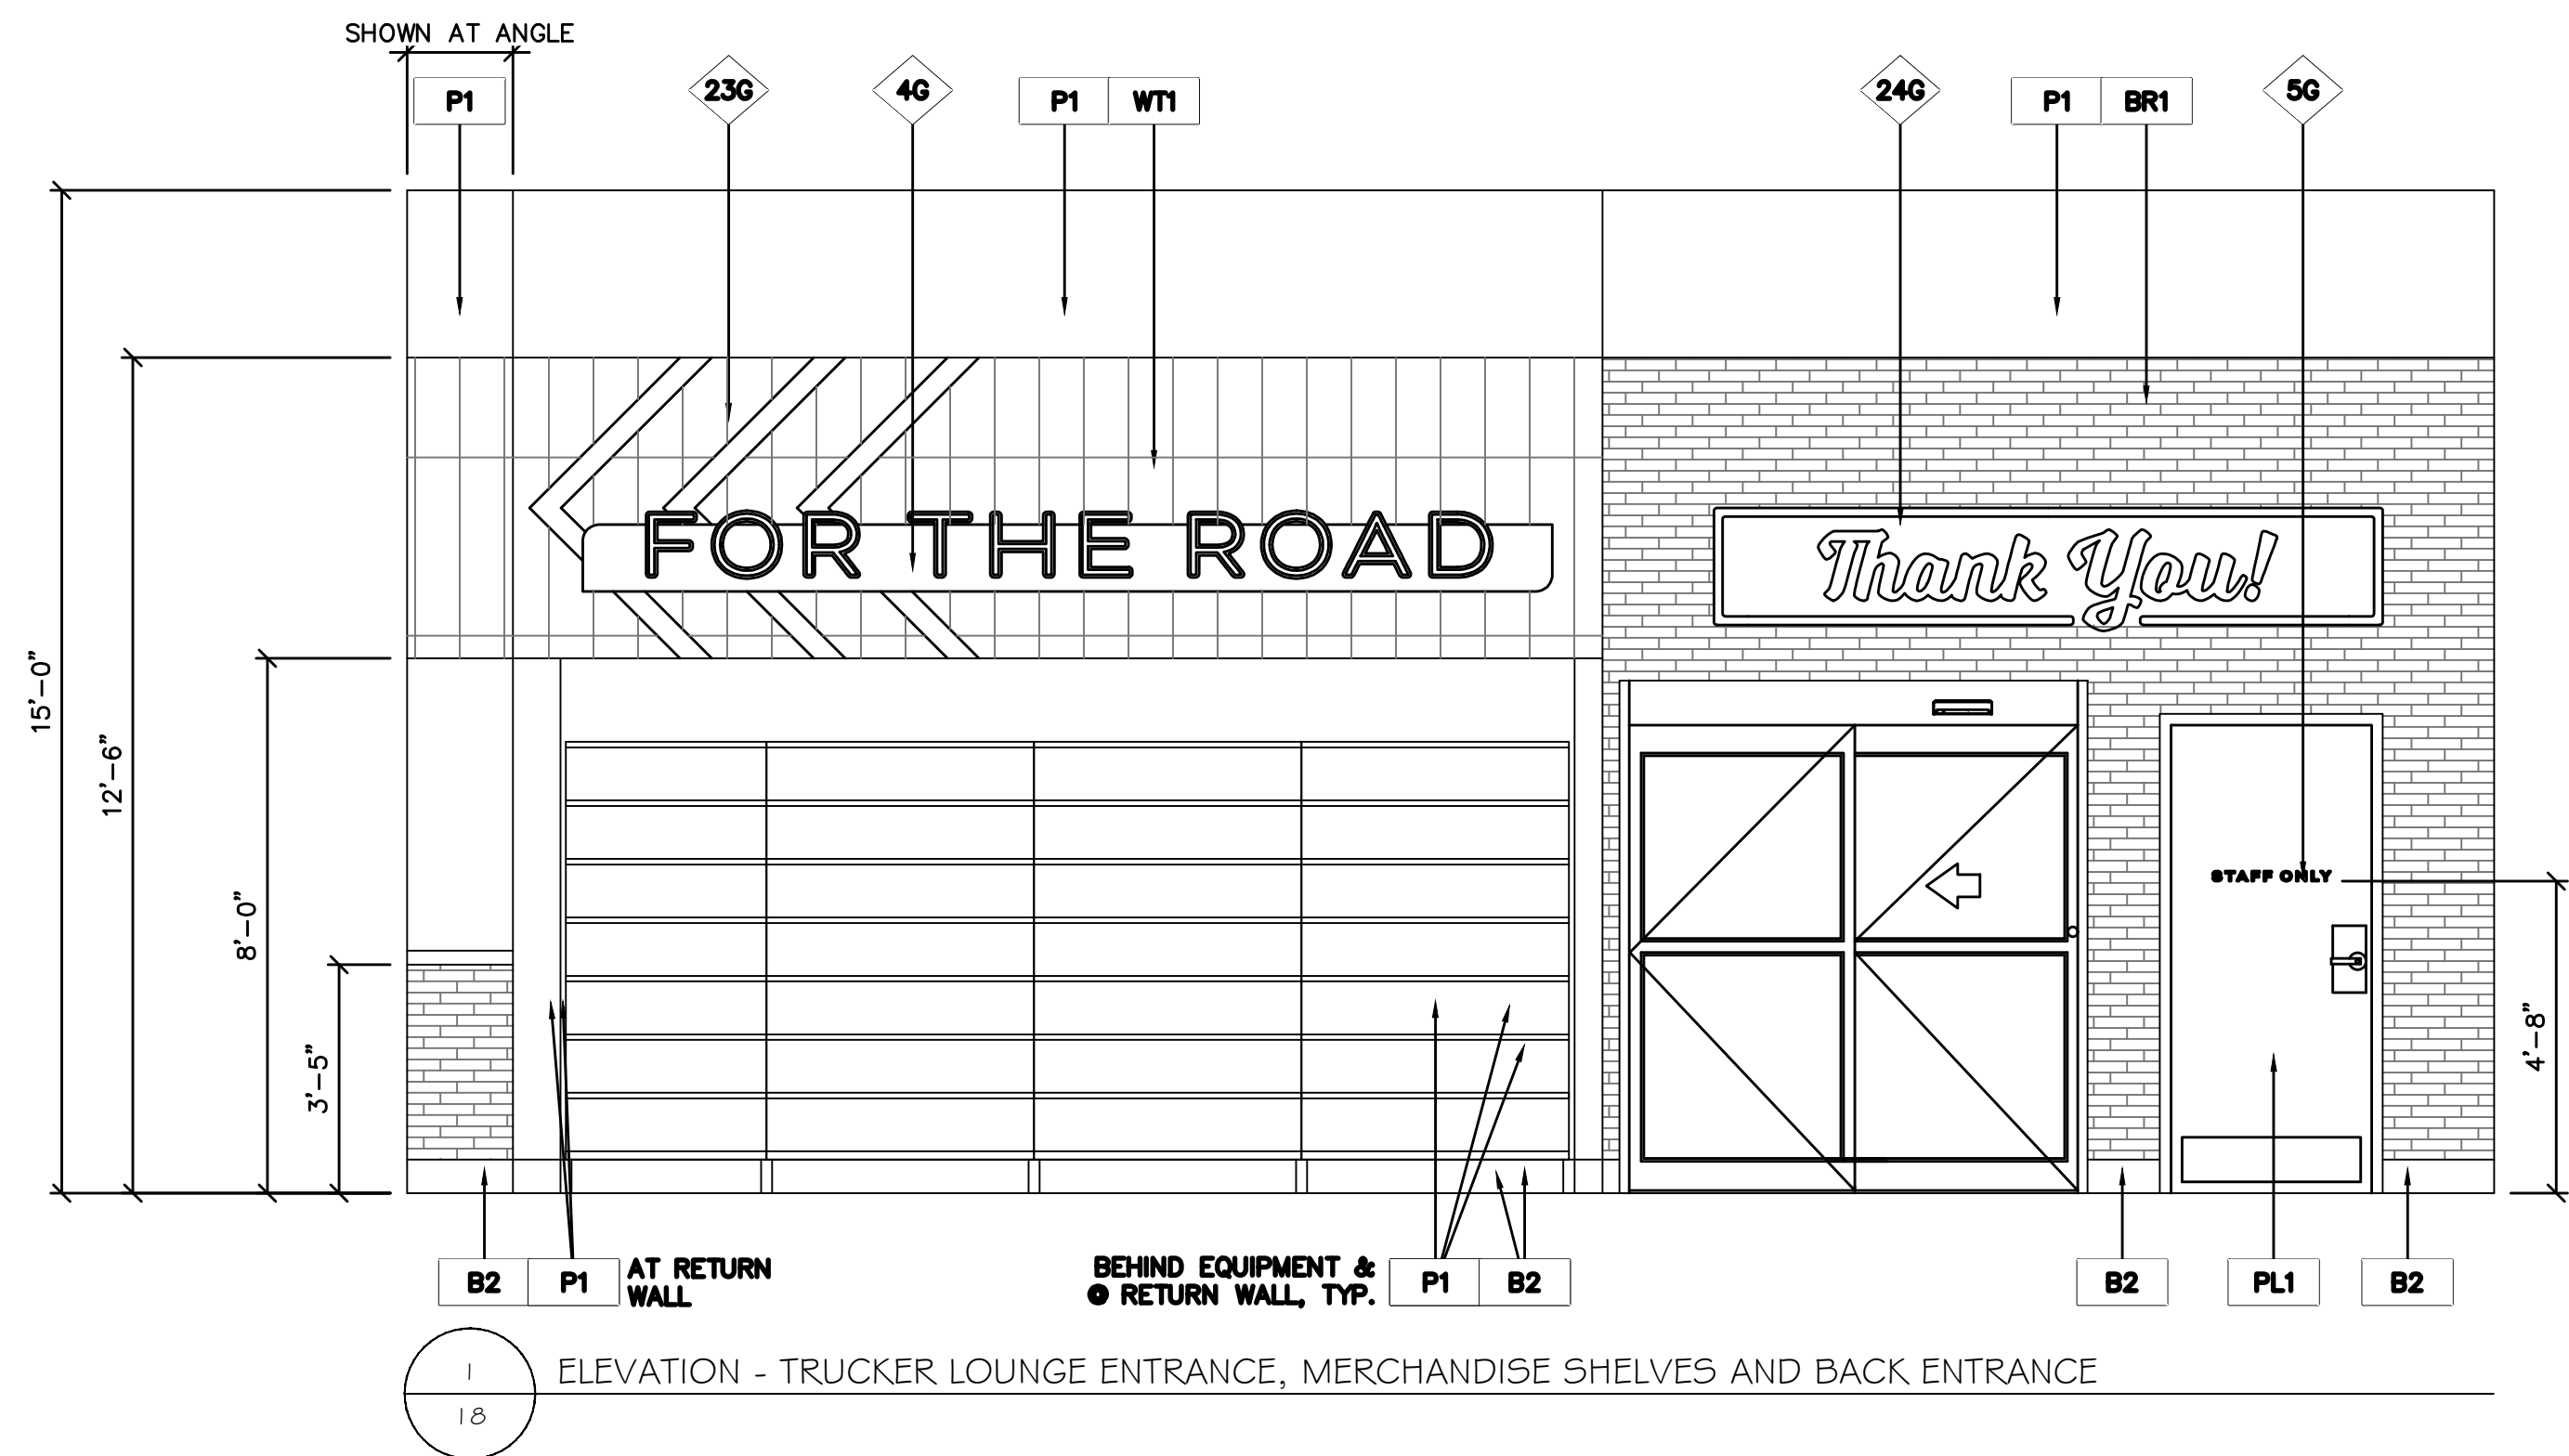

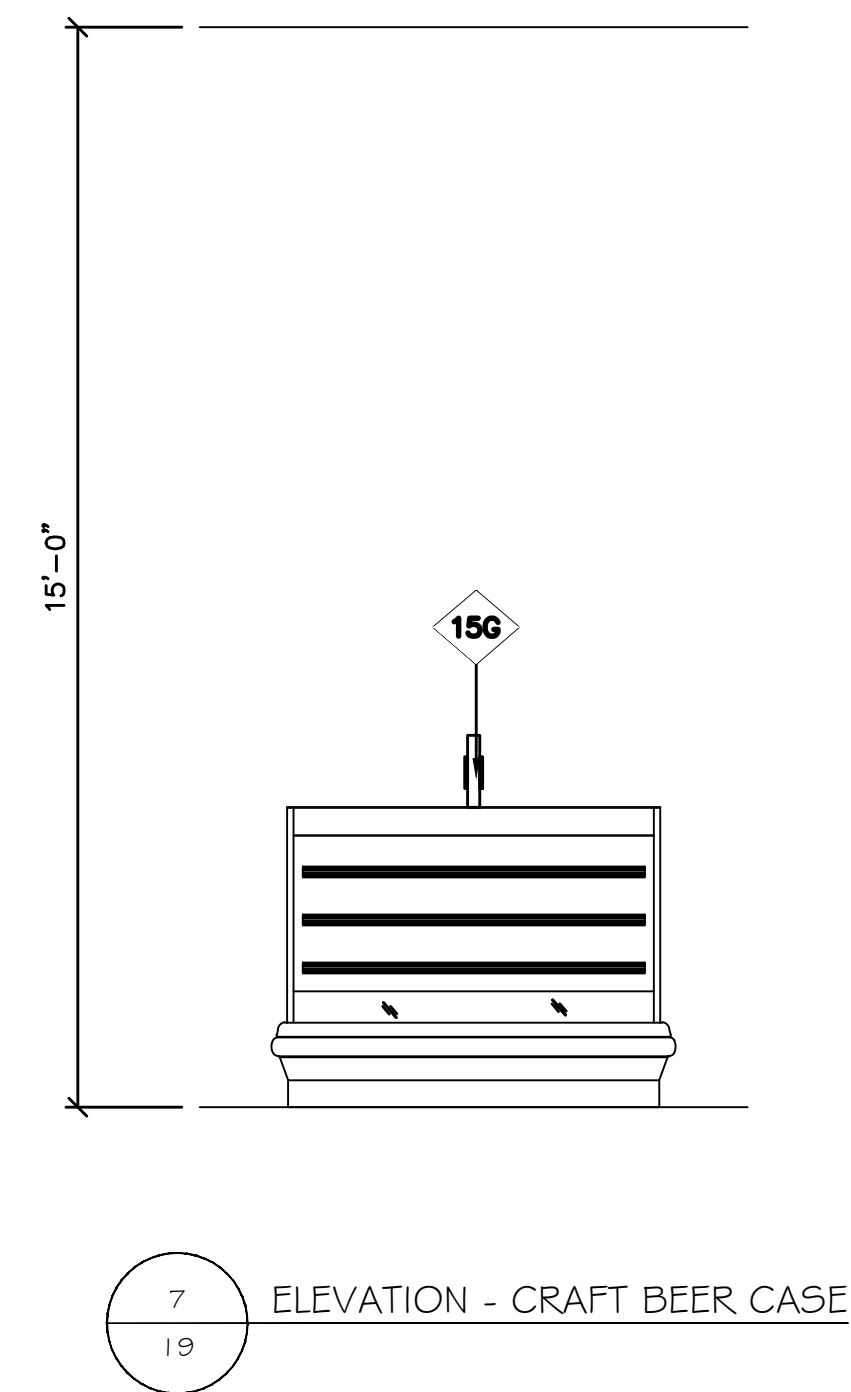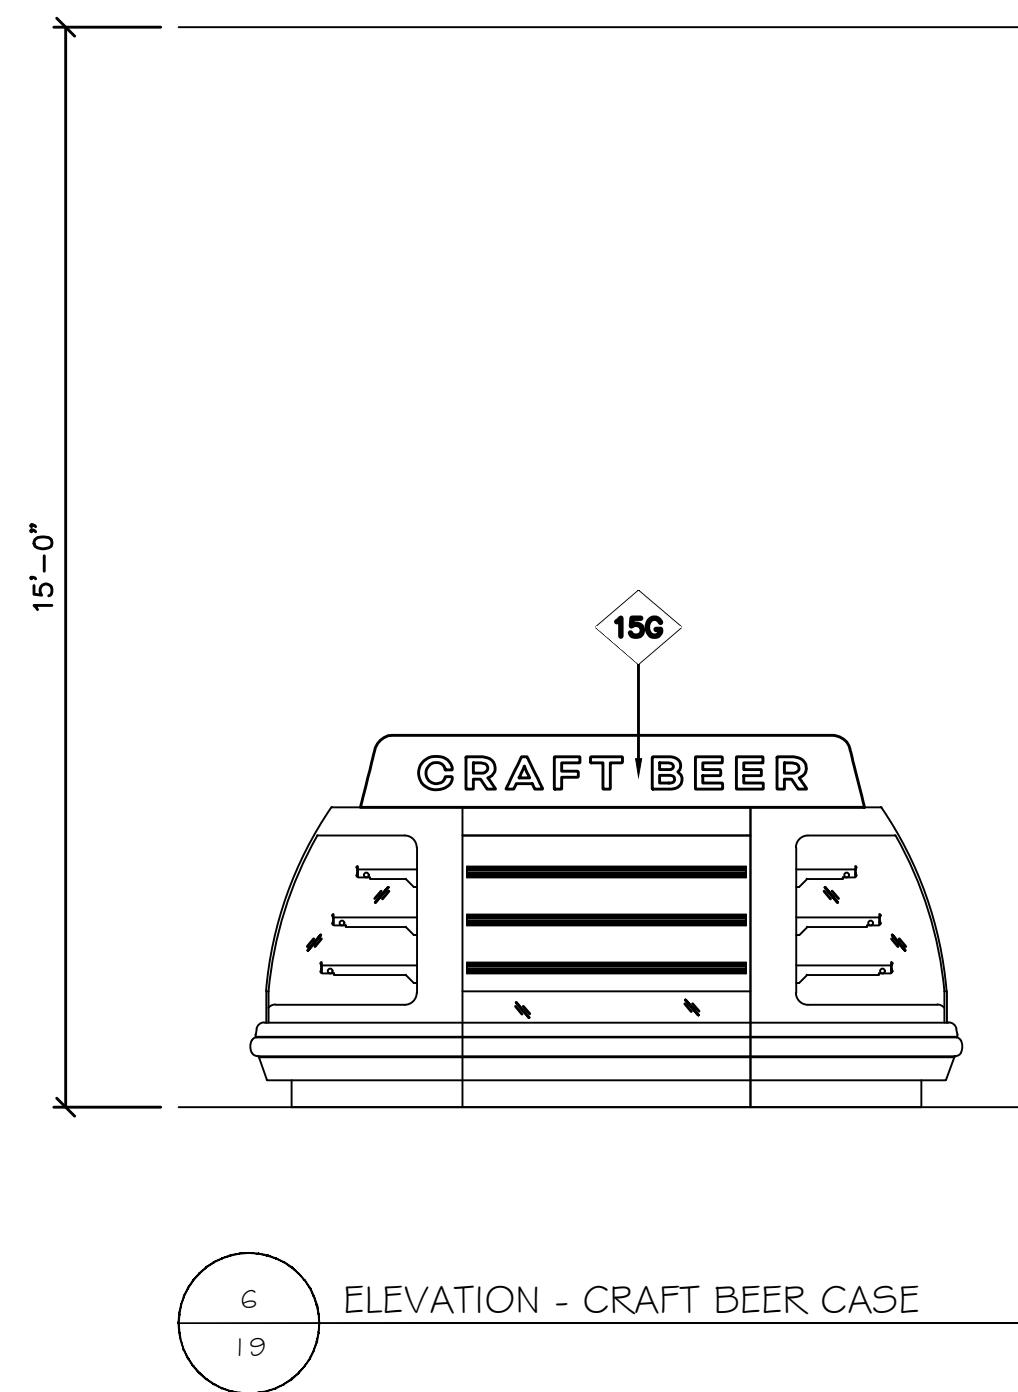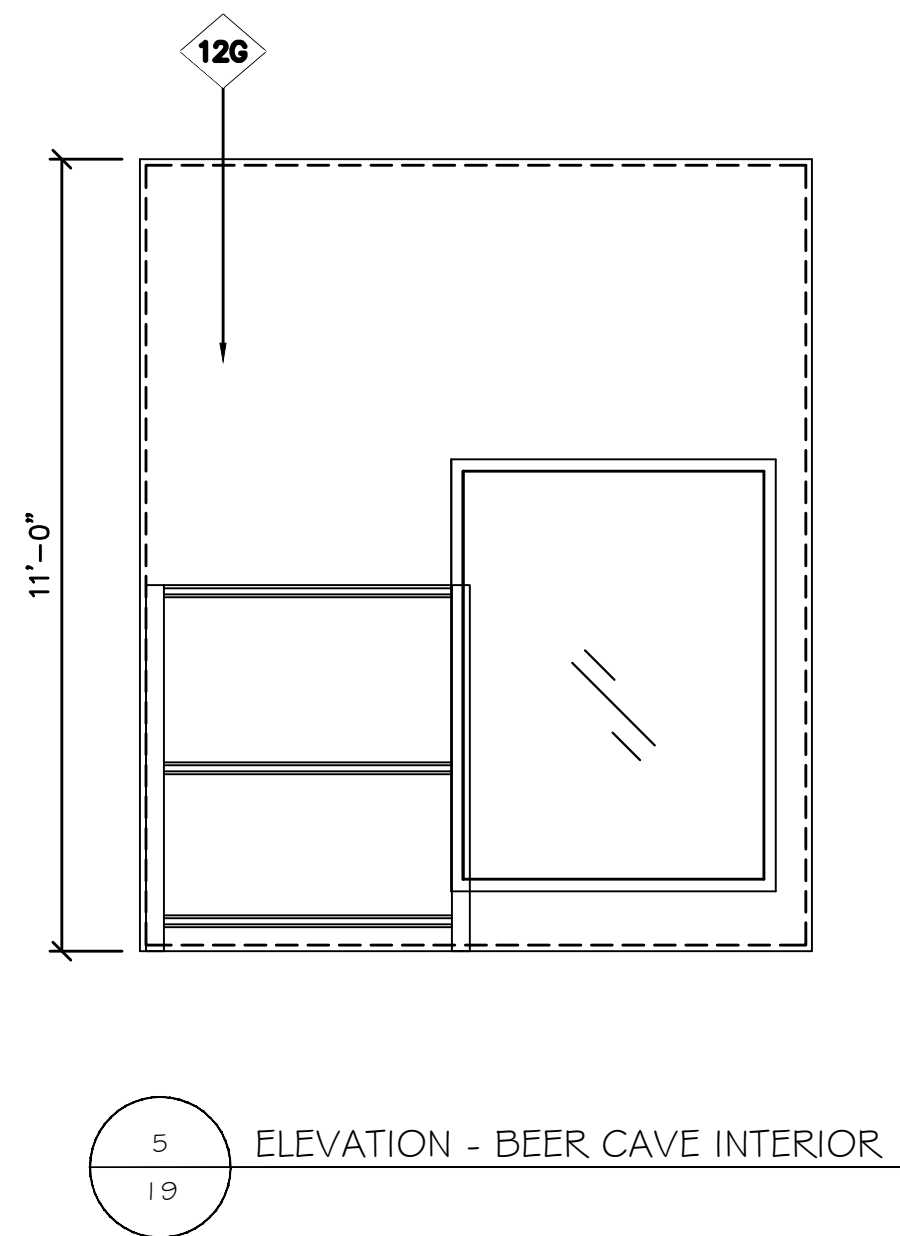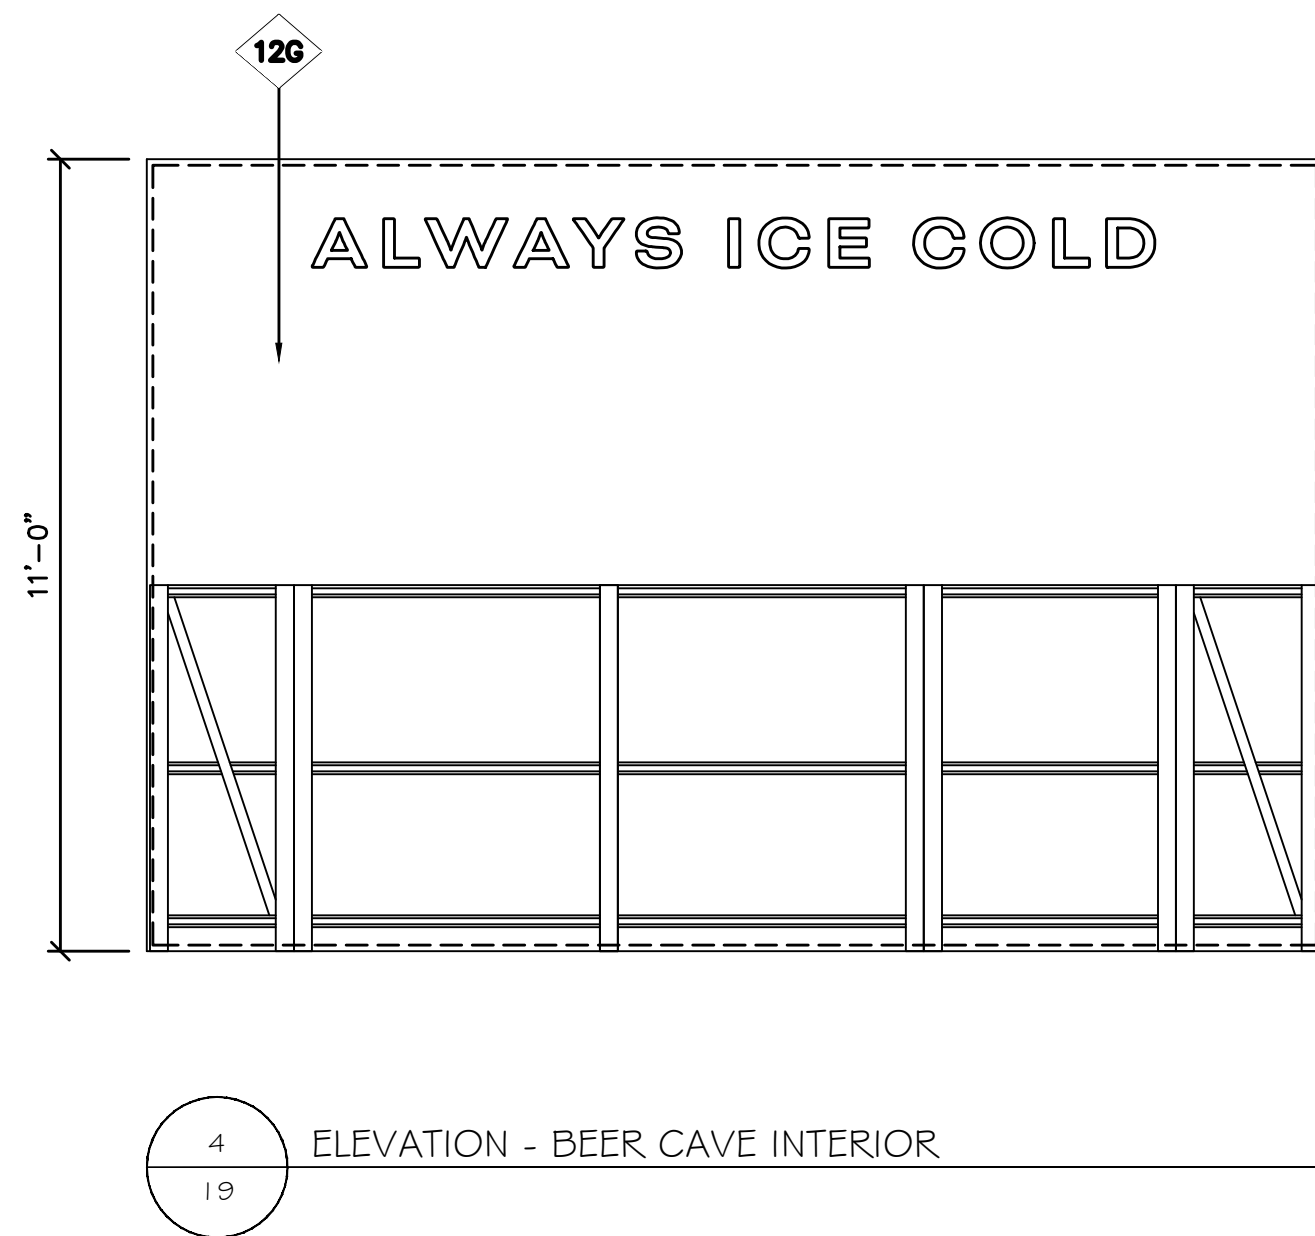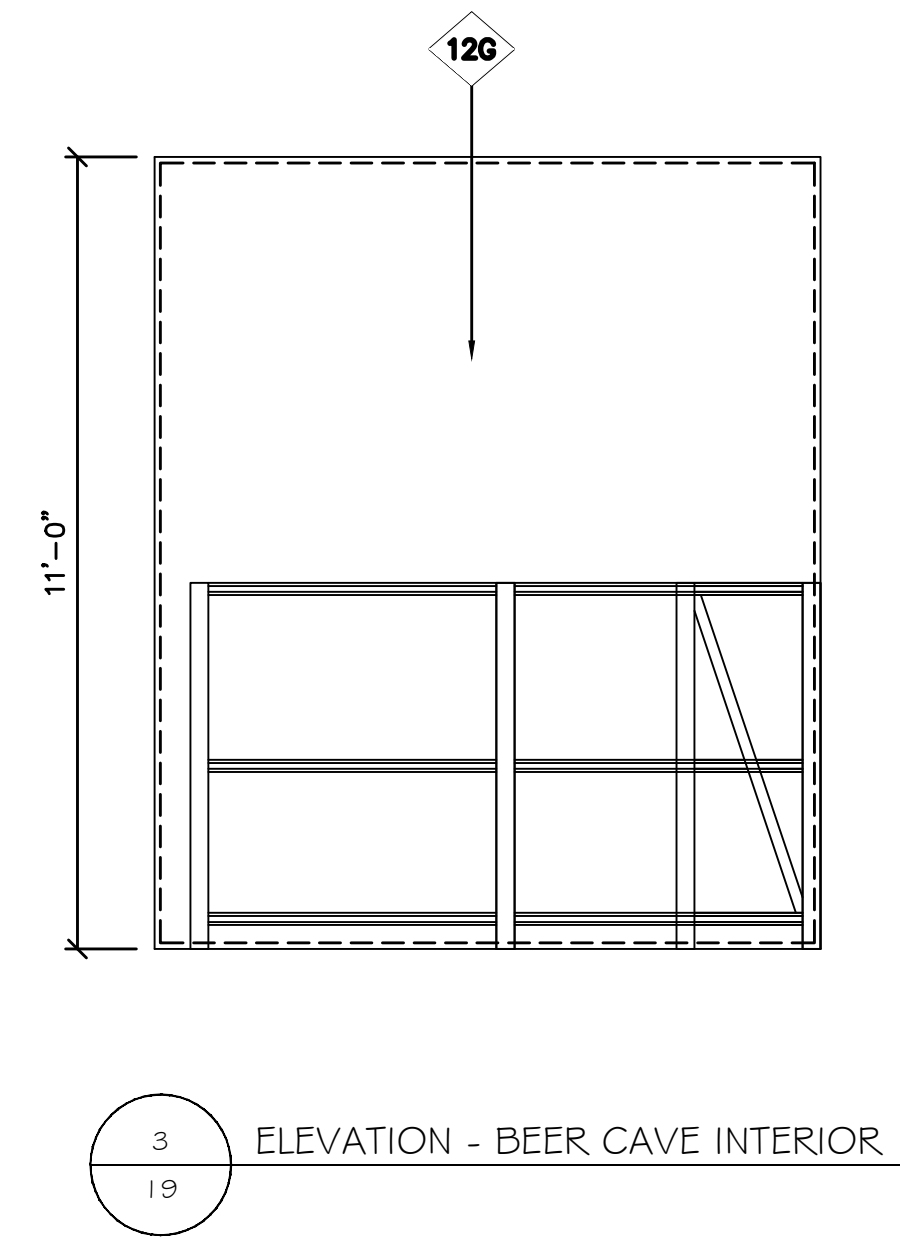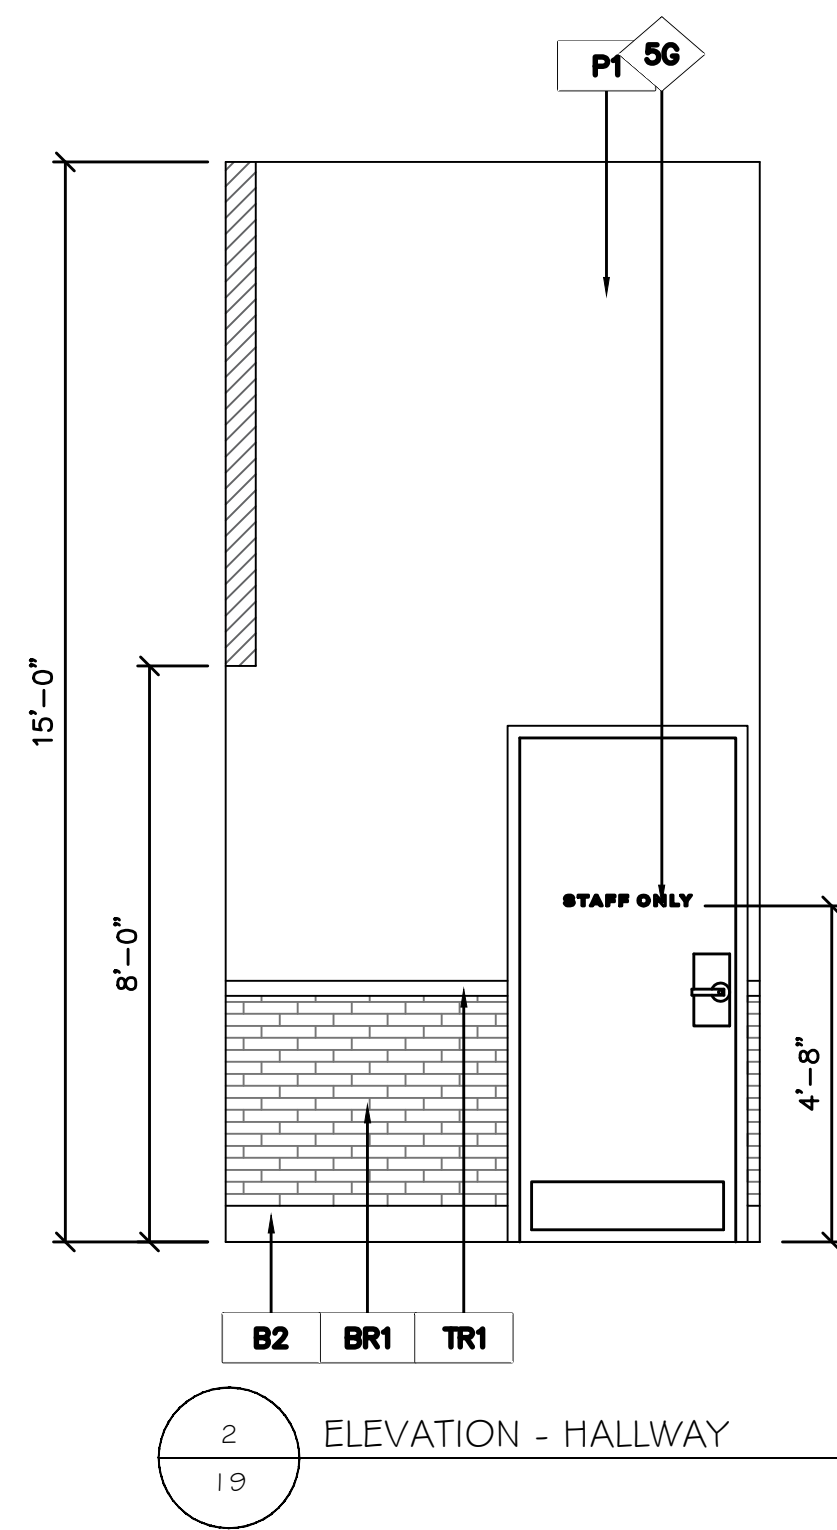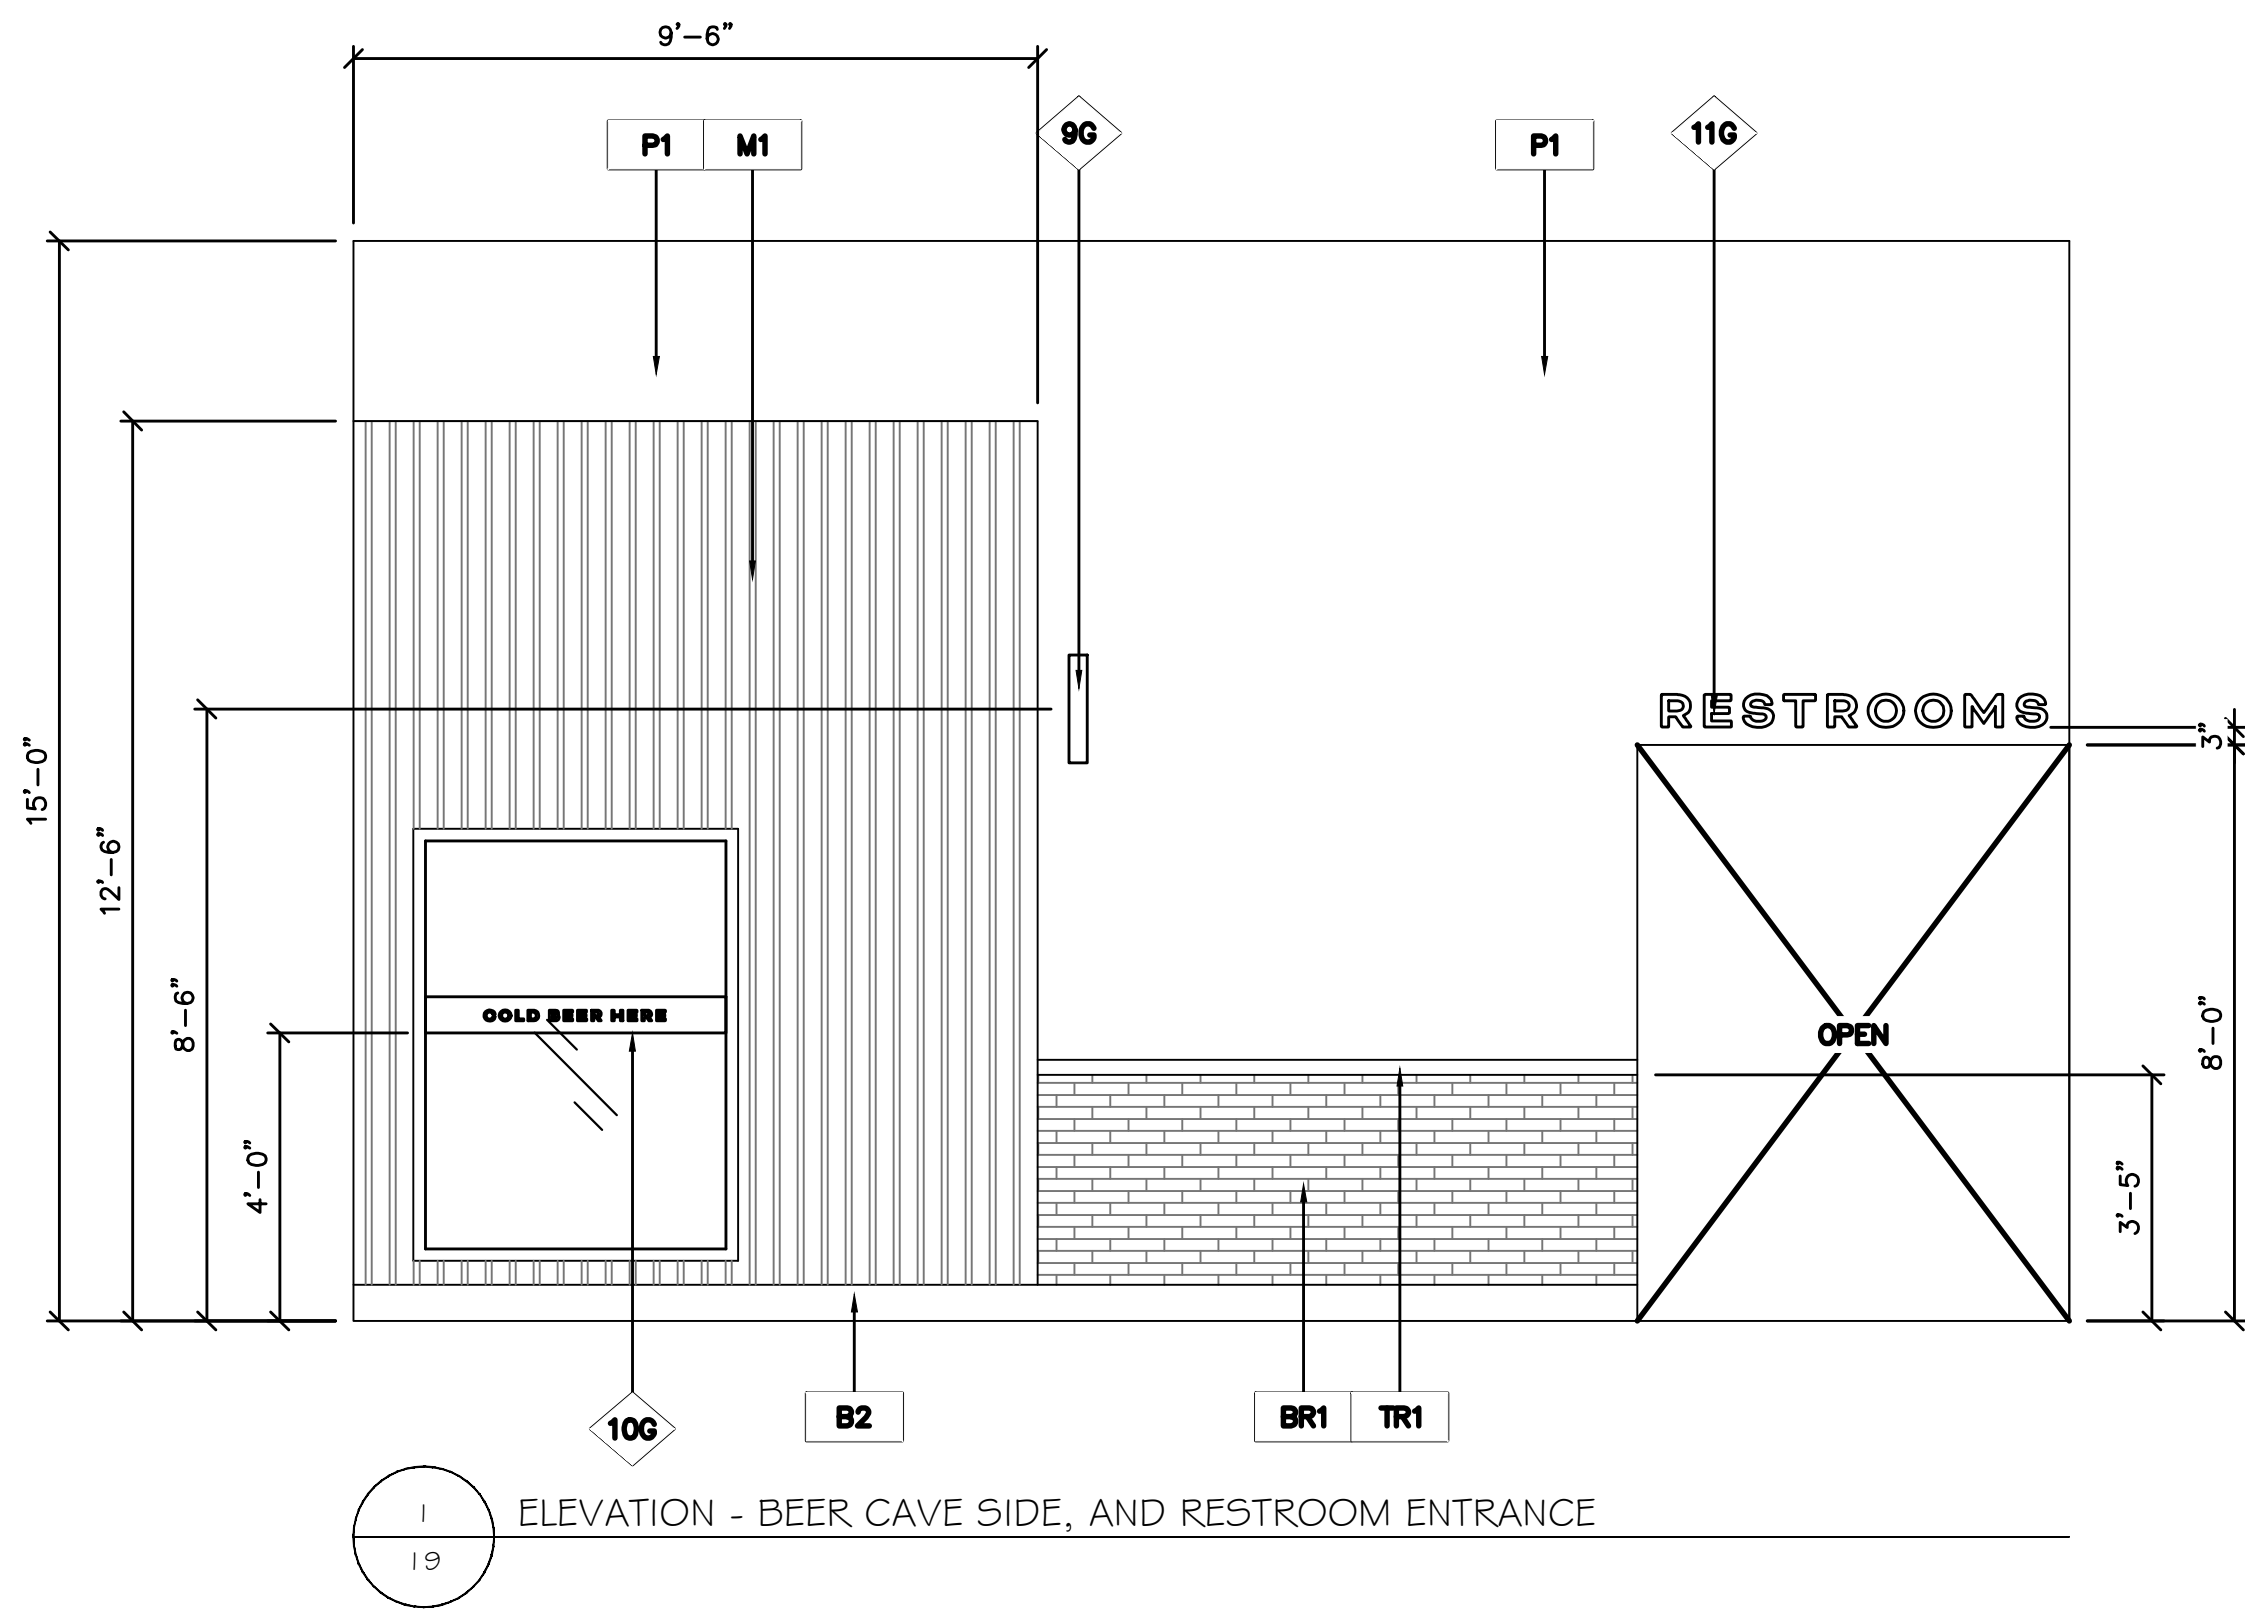


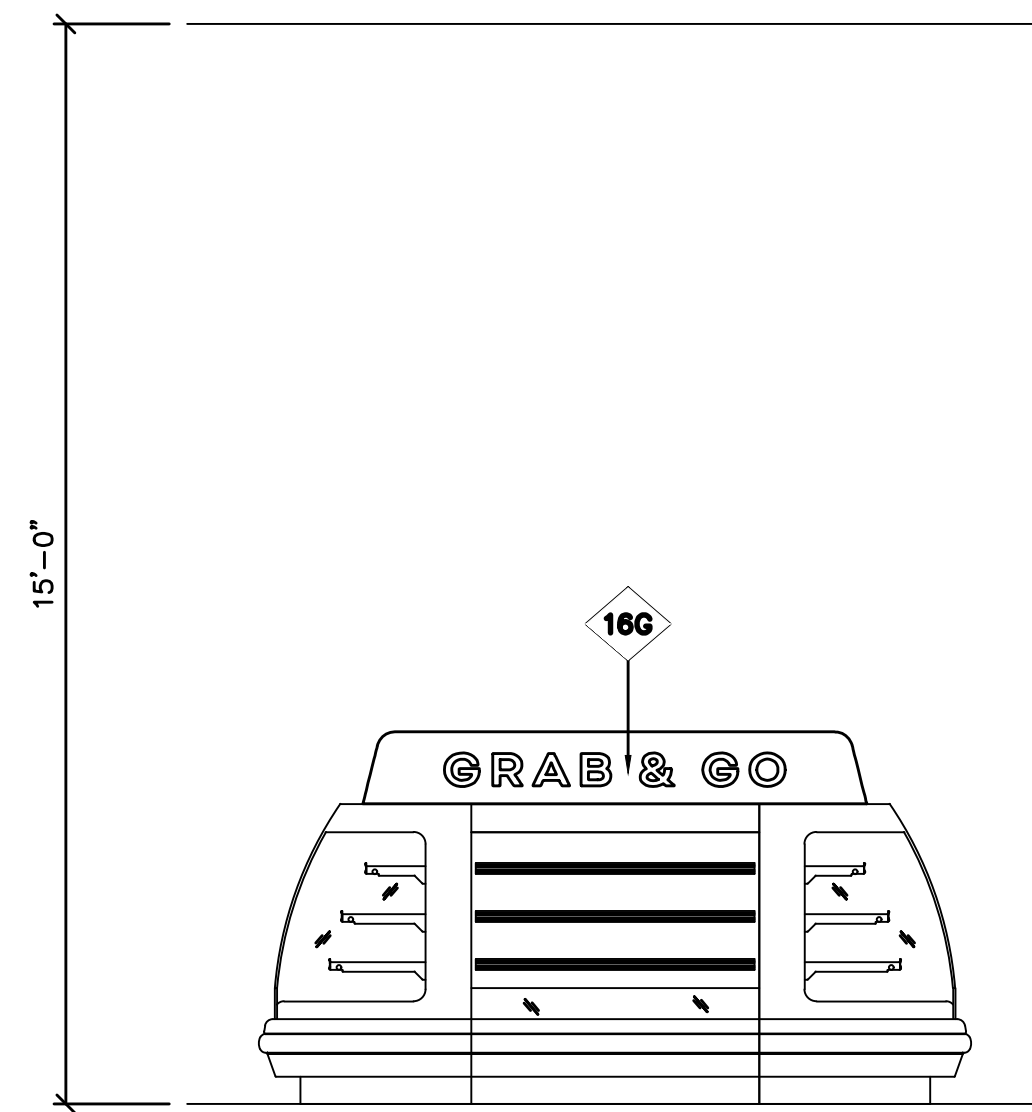


1
20 ELEVATION - GRAB N GO CASE

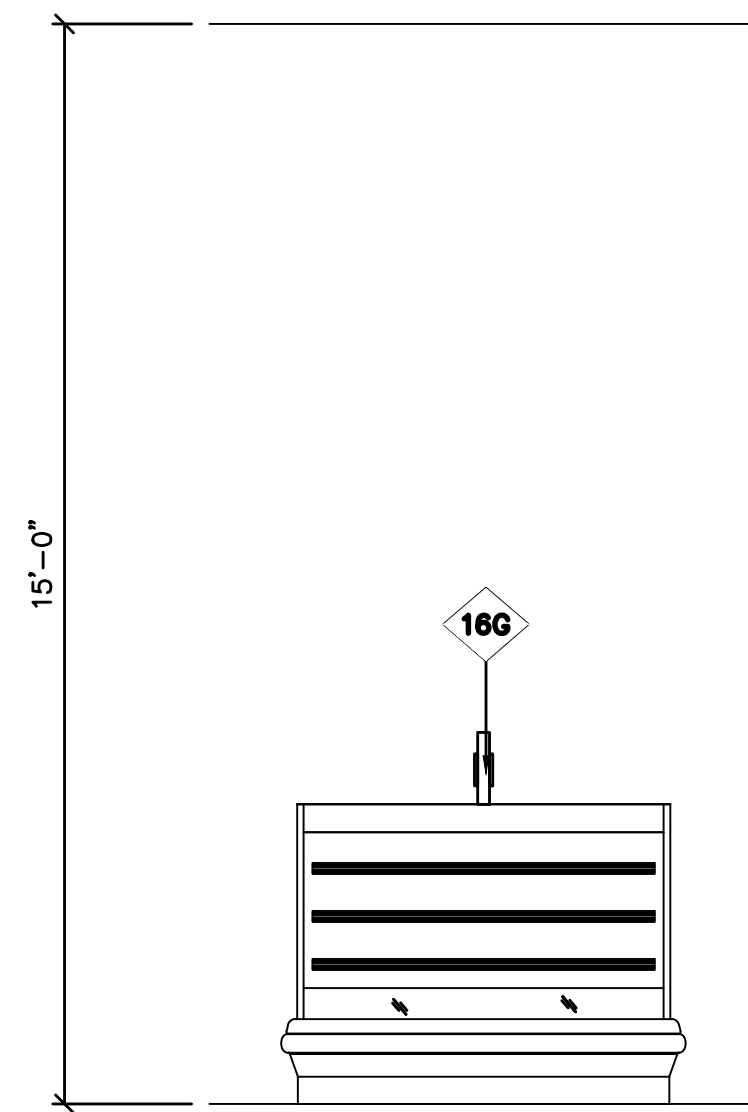


2
20 ELEVATION - GRAB N GO CASE

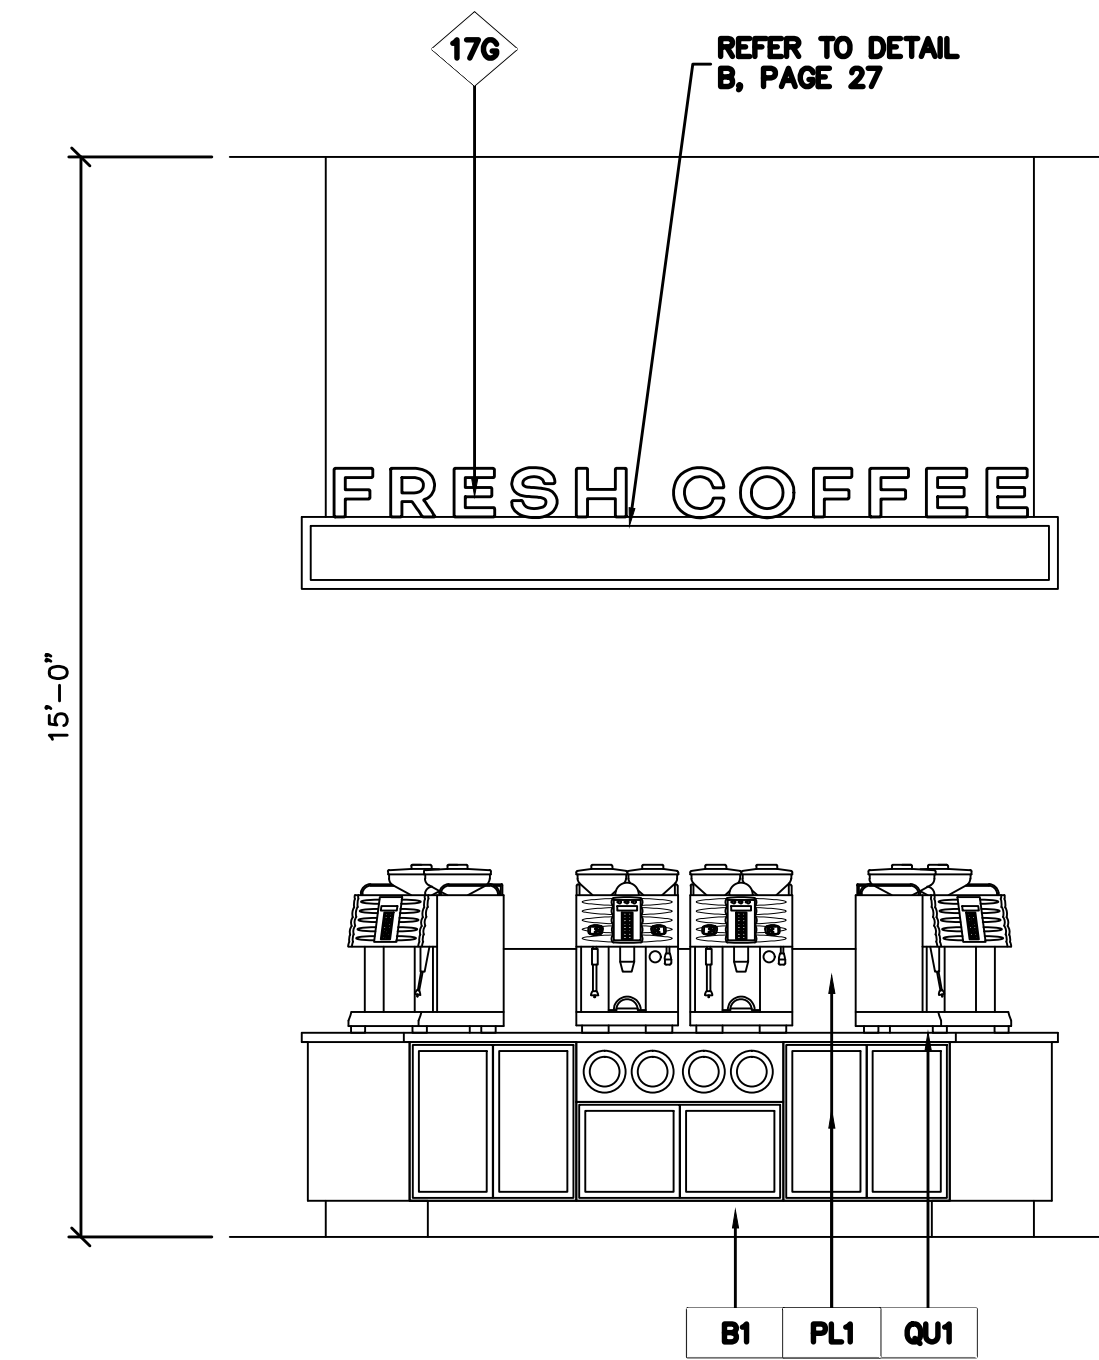


3
20 ELEVATION - COFFEE ISLAND

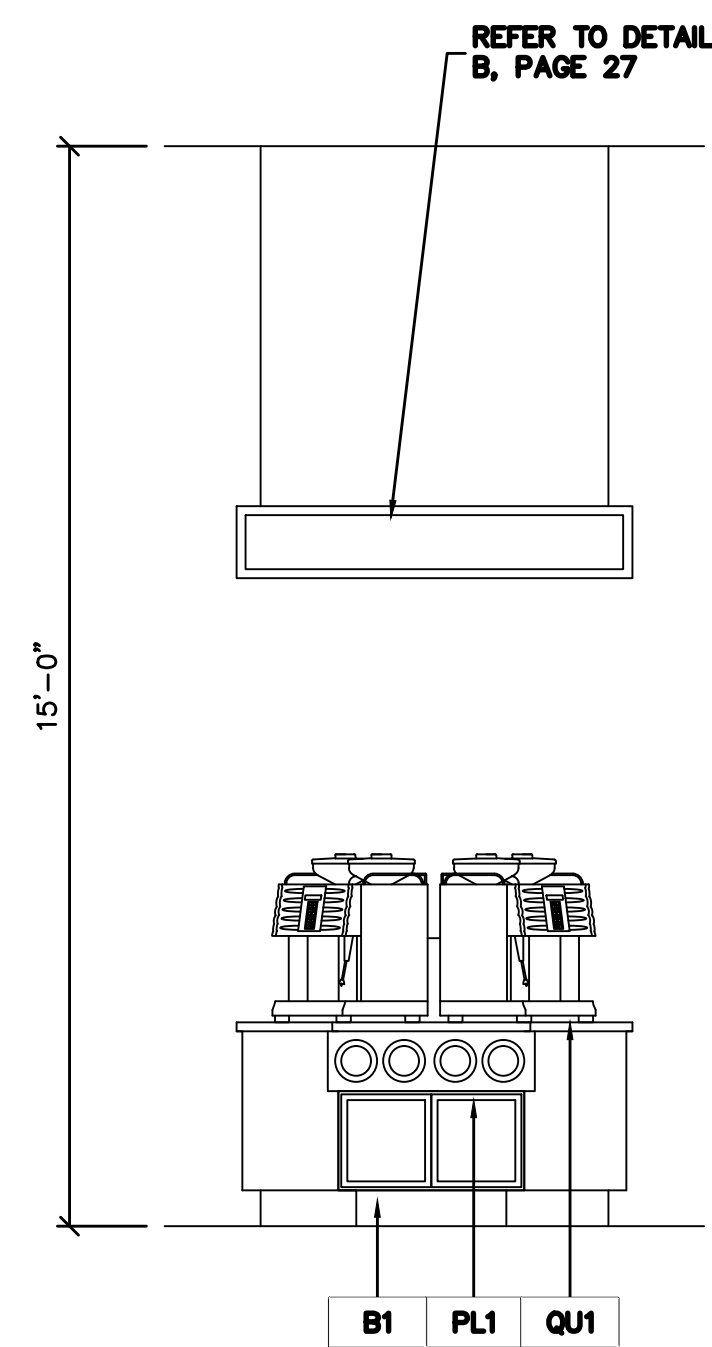

4
20 ELEVATION - COFFEE ISLAND

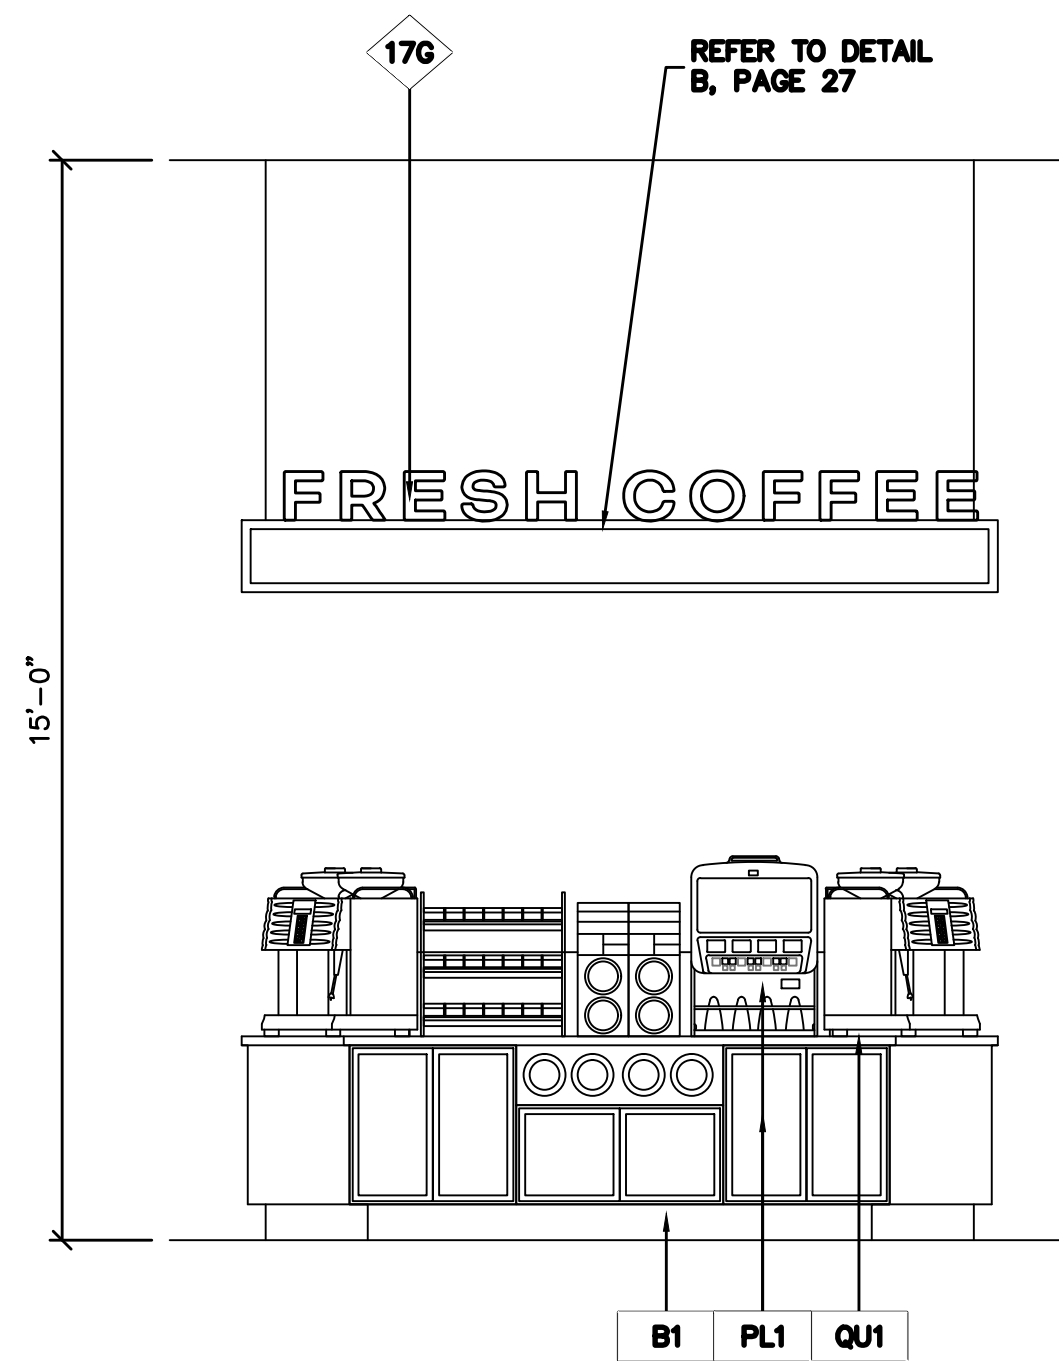

5
20 ELEVATION - COFFEE ISLAND

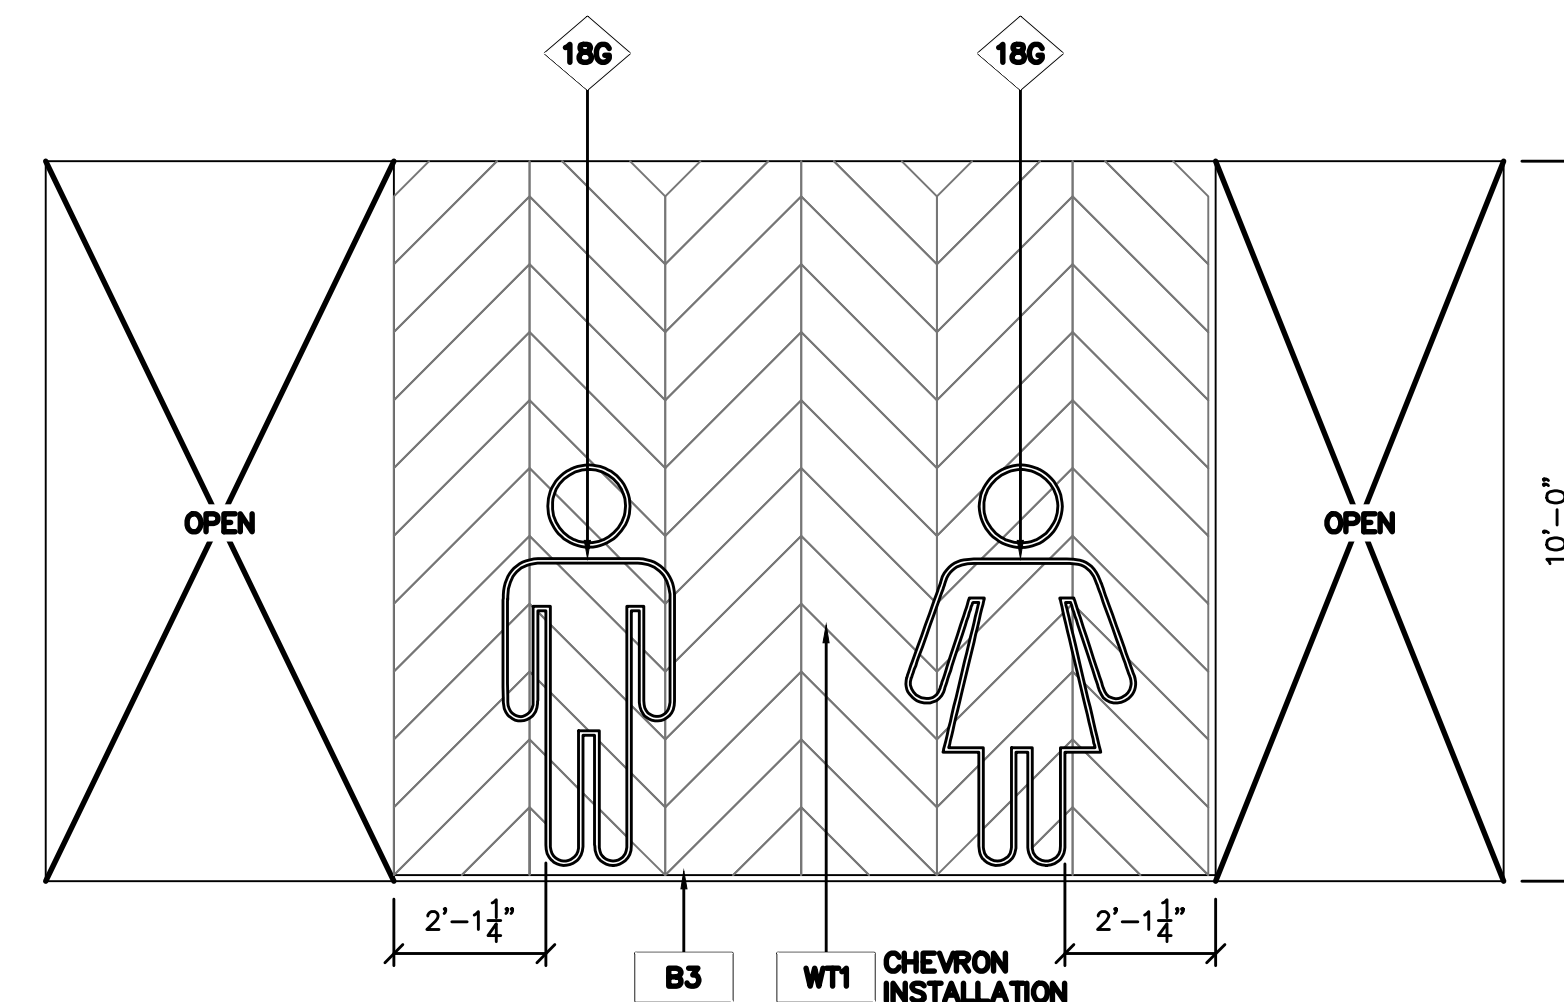

6
20 ELEVATION - RESTROOM ENTRANCE




STROUD
AND COMPANY


P A R A G O N
S O L U T I O N S




201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-827-7171

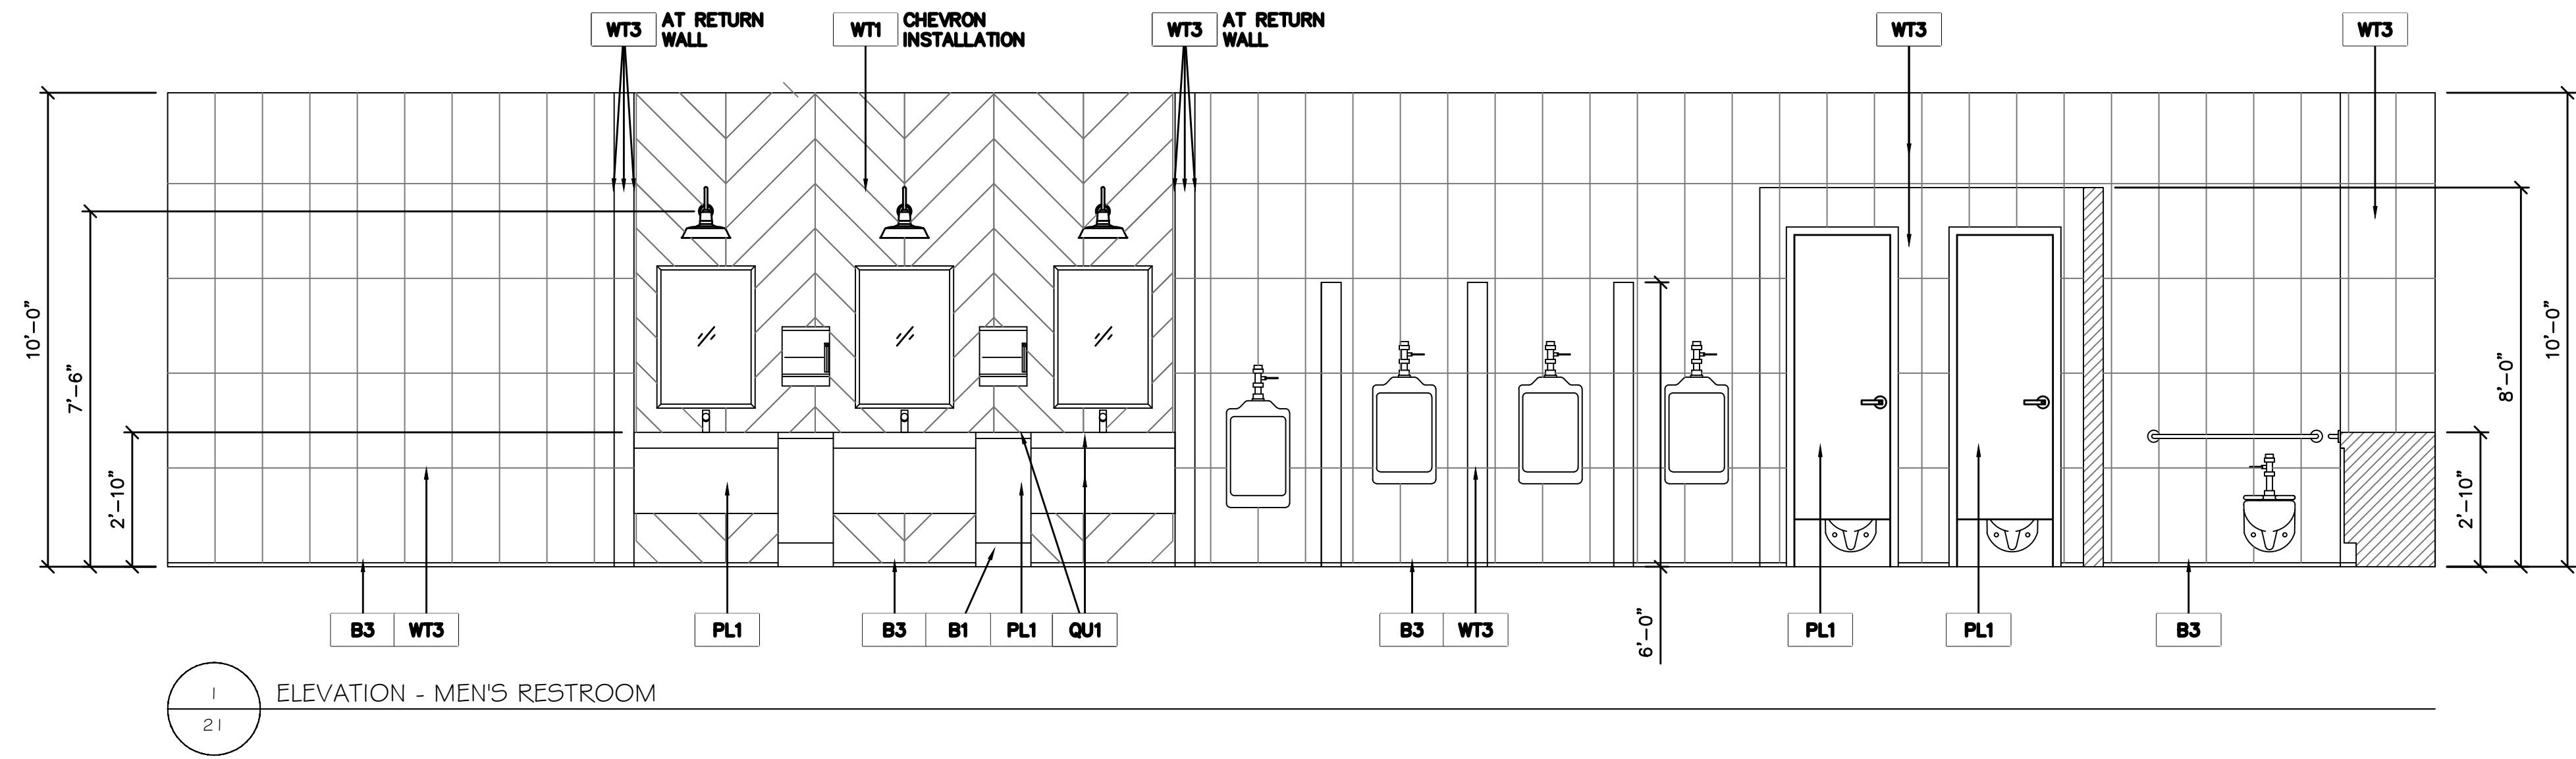


ELEVATION - MEN'S RESTROOM

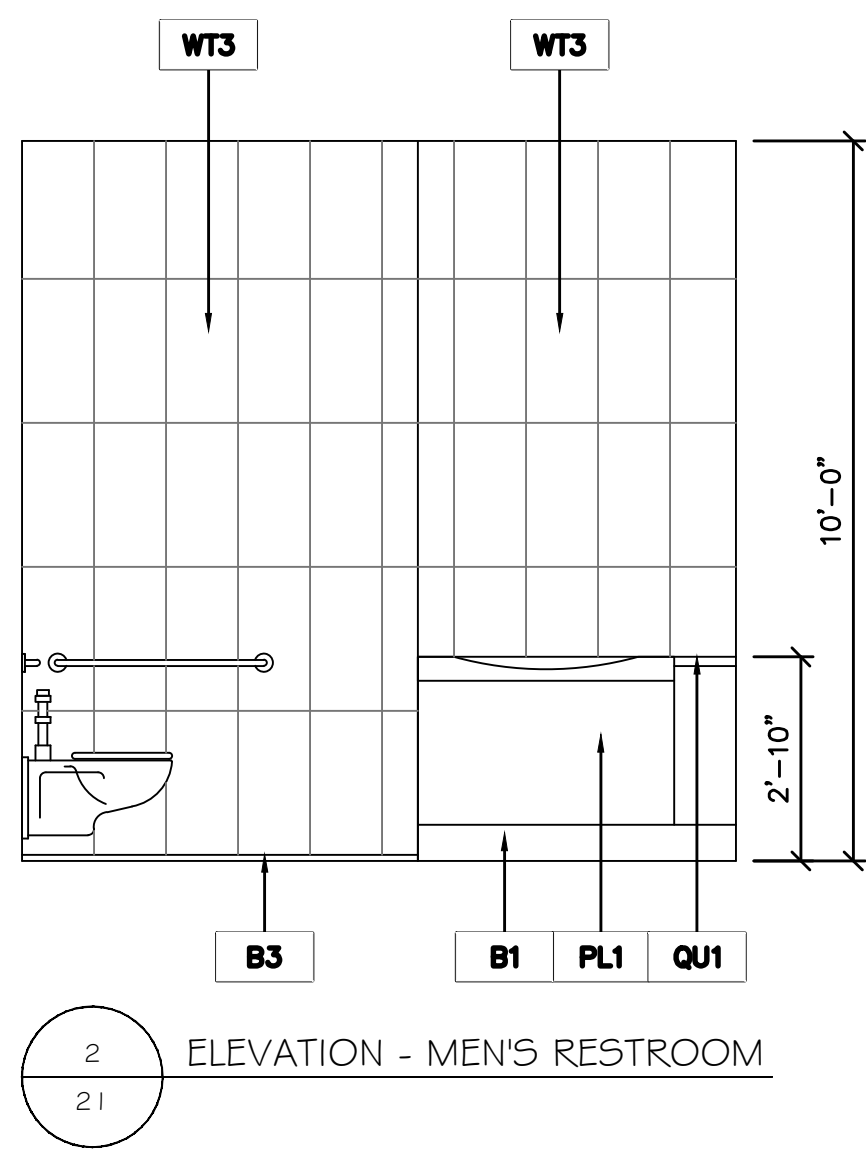

ELEVATION - MEN'S RESTROOM

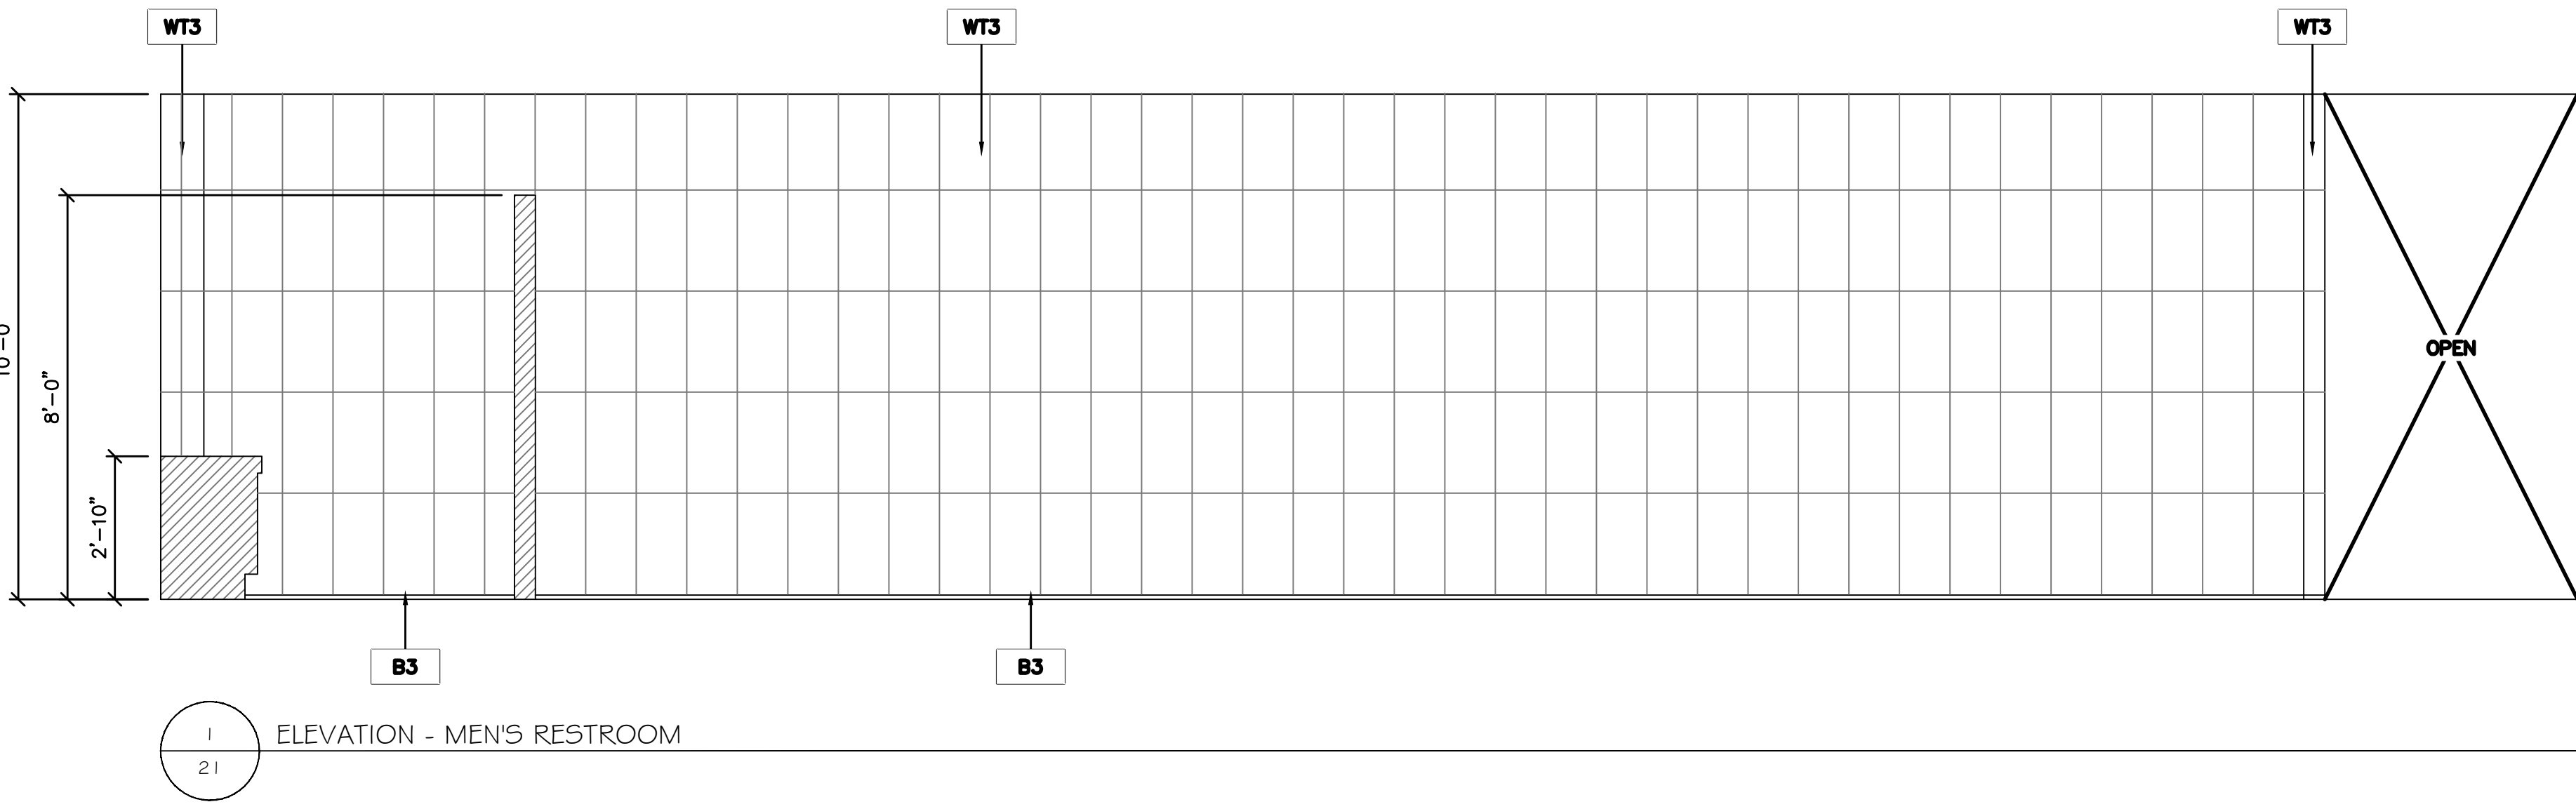

ELEVATION - MEN'S RESTROOM

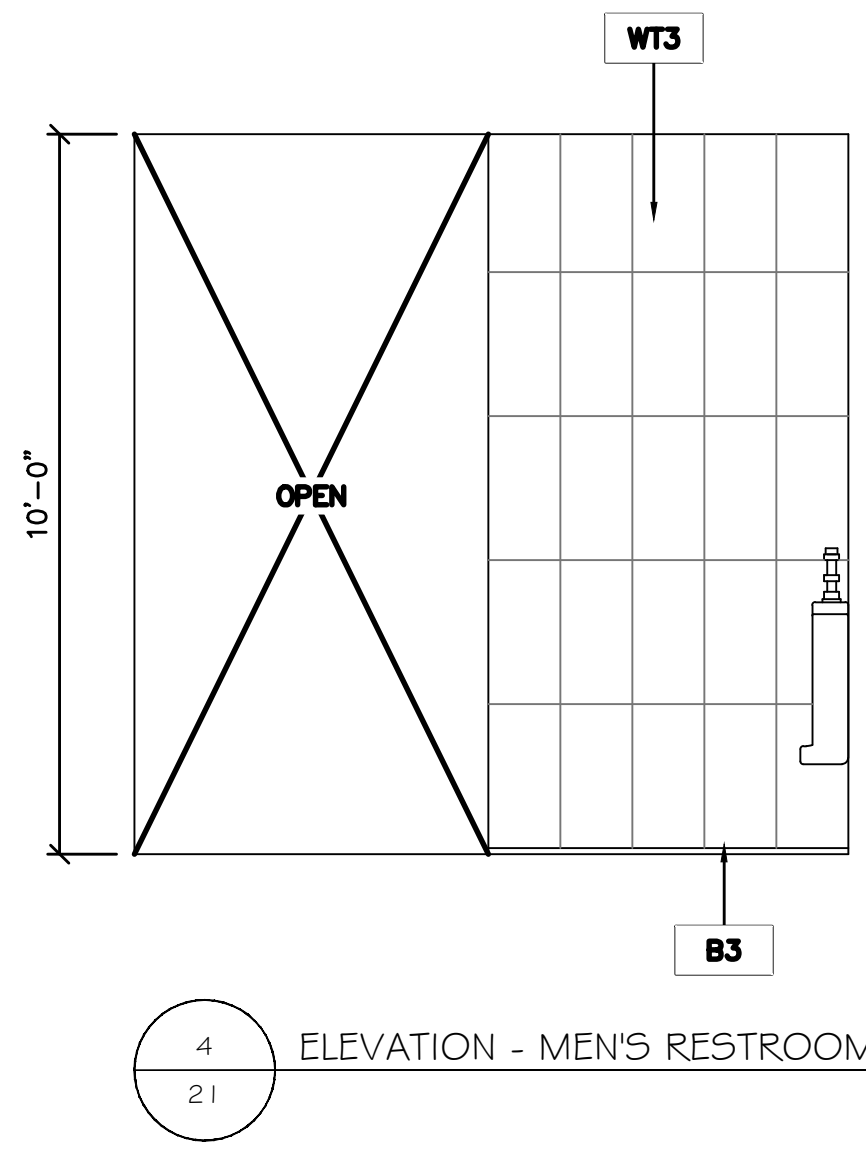

ELEVATION - MEN'S RESTROOM




STROUD
AND COMPANY


PARAGON
SOLUTIONS




201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-827-7171

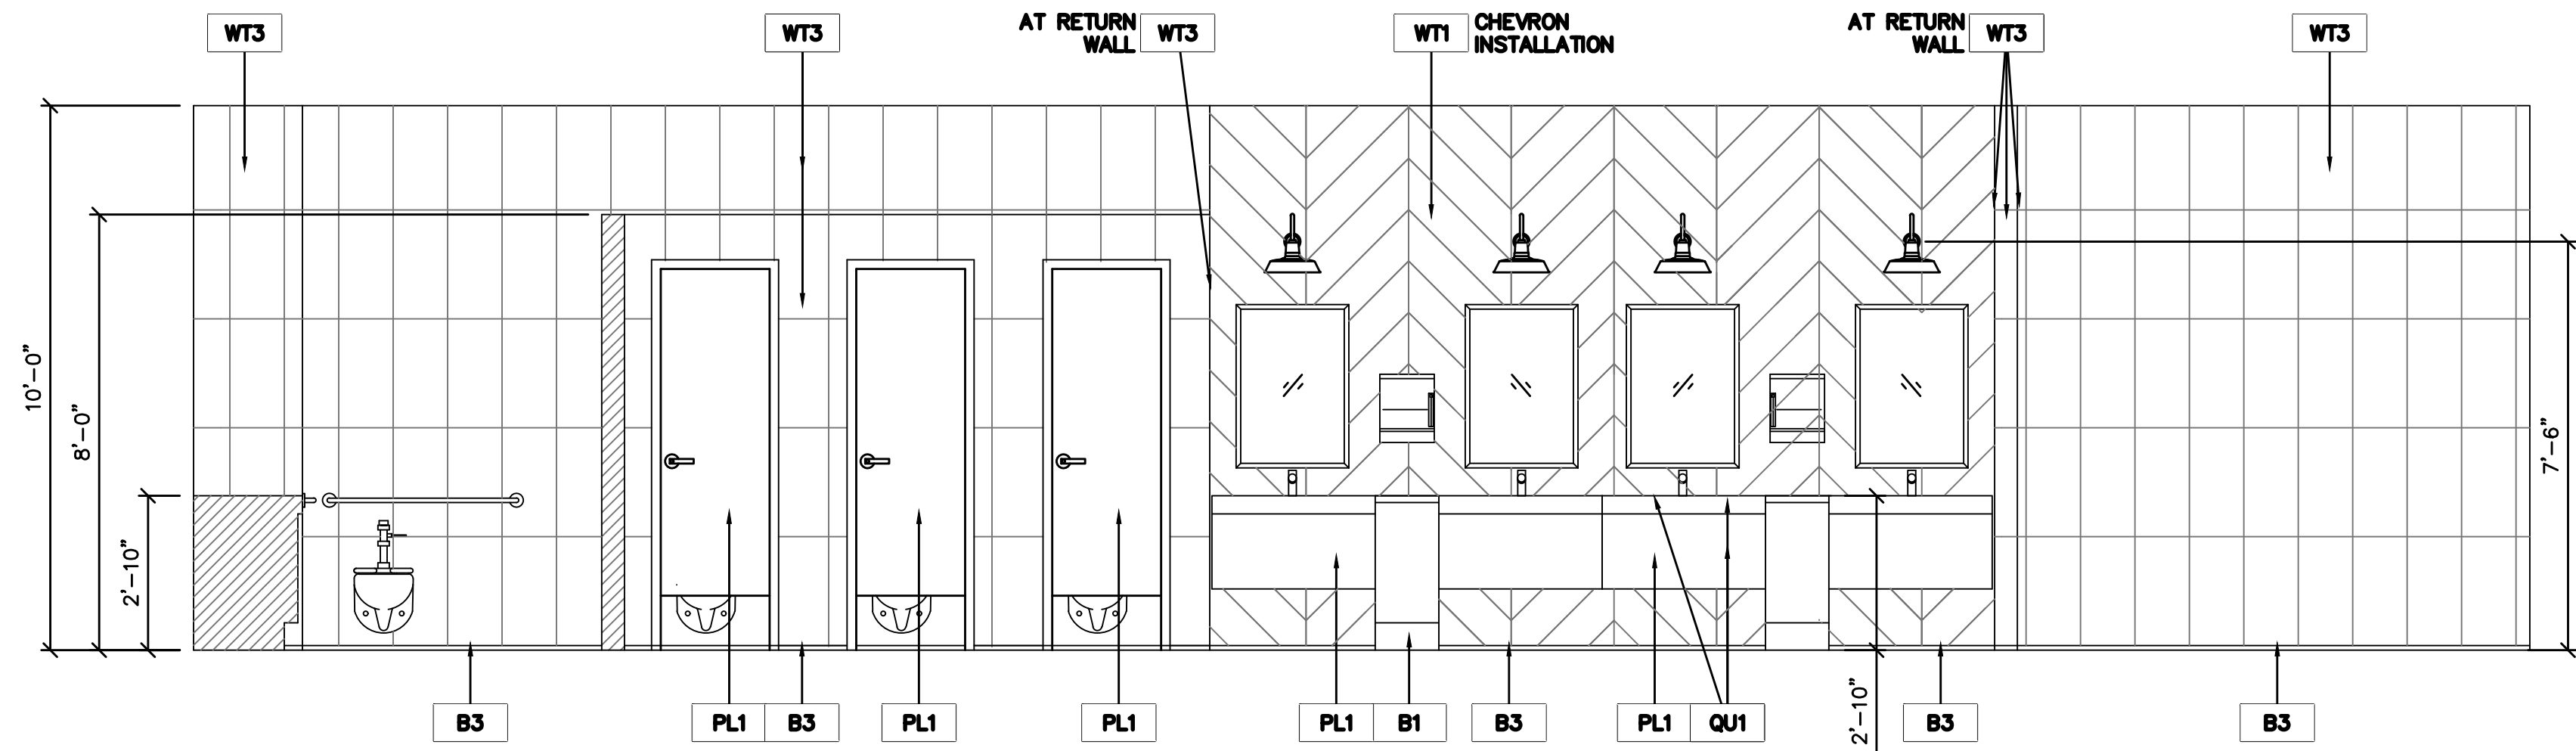


1
22
ELEVATION - WOMEN'S RESTROOM

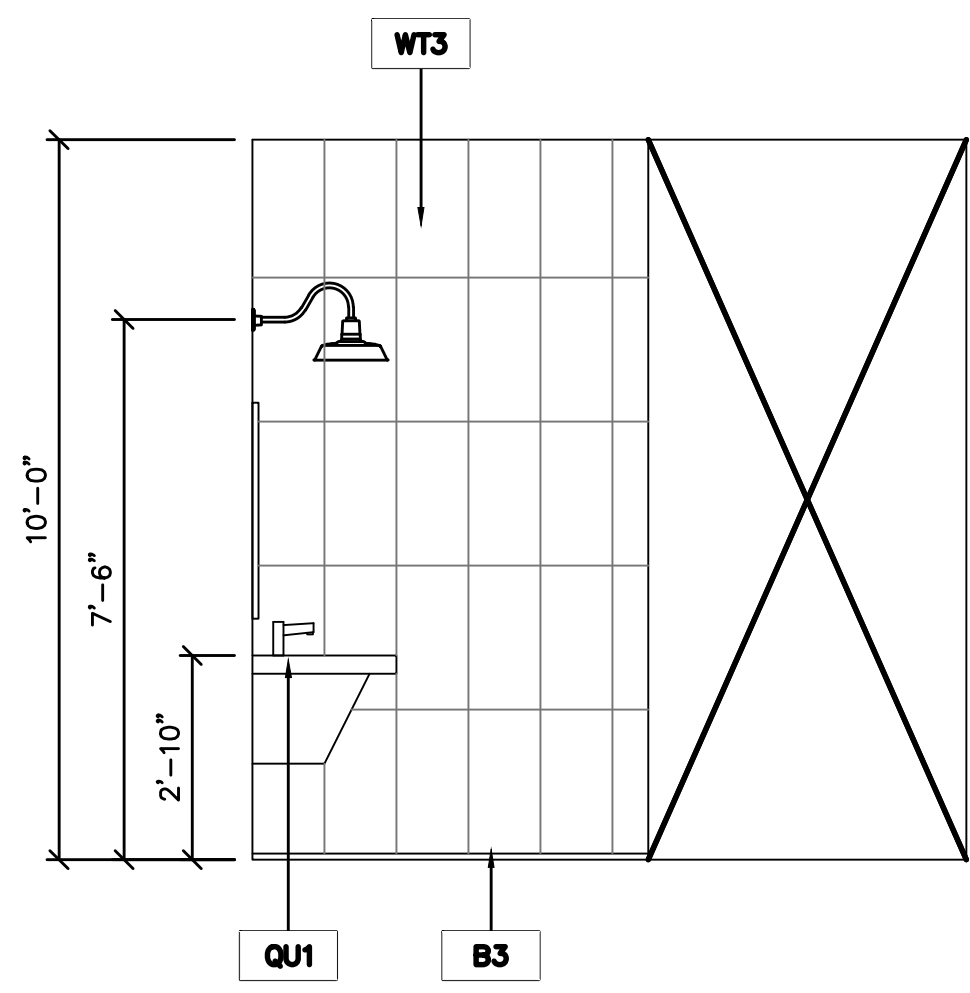





2
22
ELEVATION - WOMEN'S RESTROOM

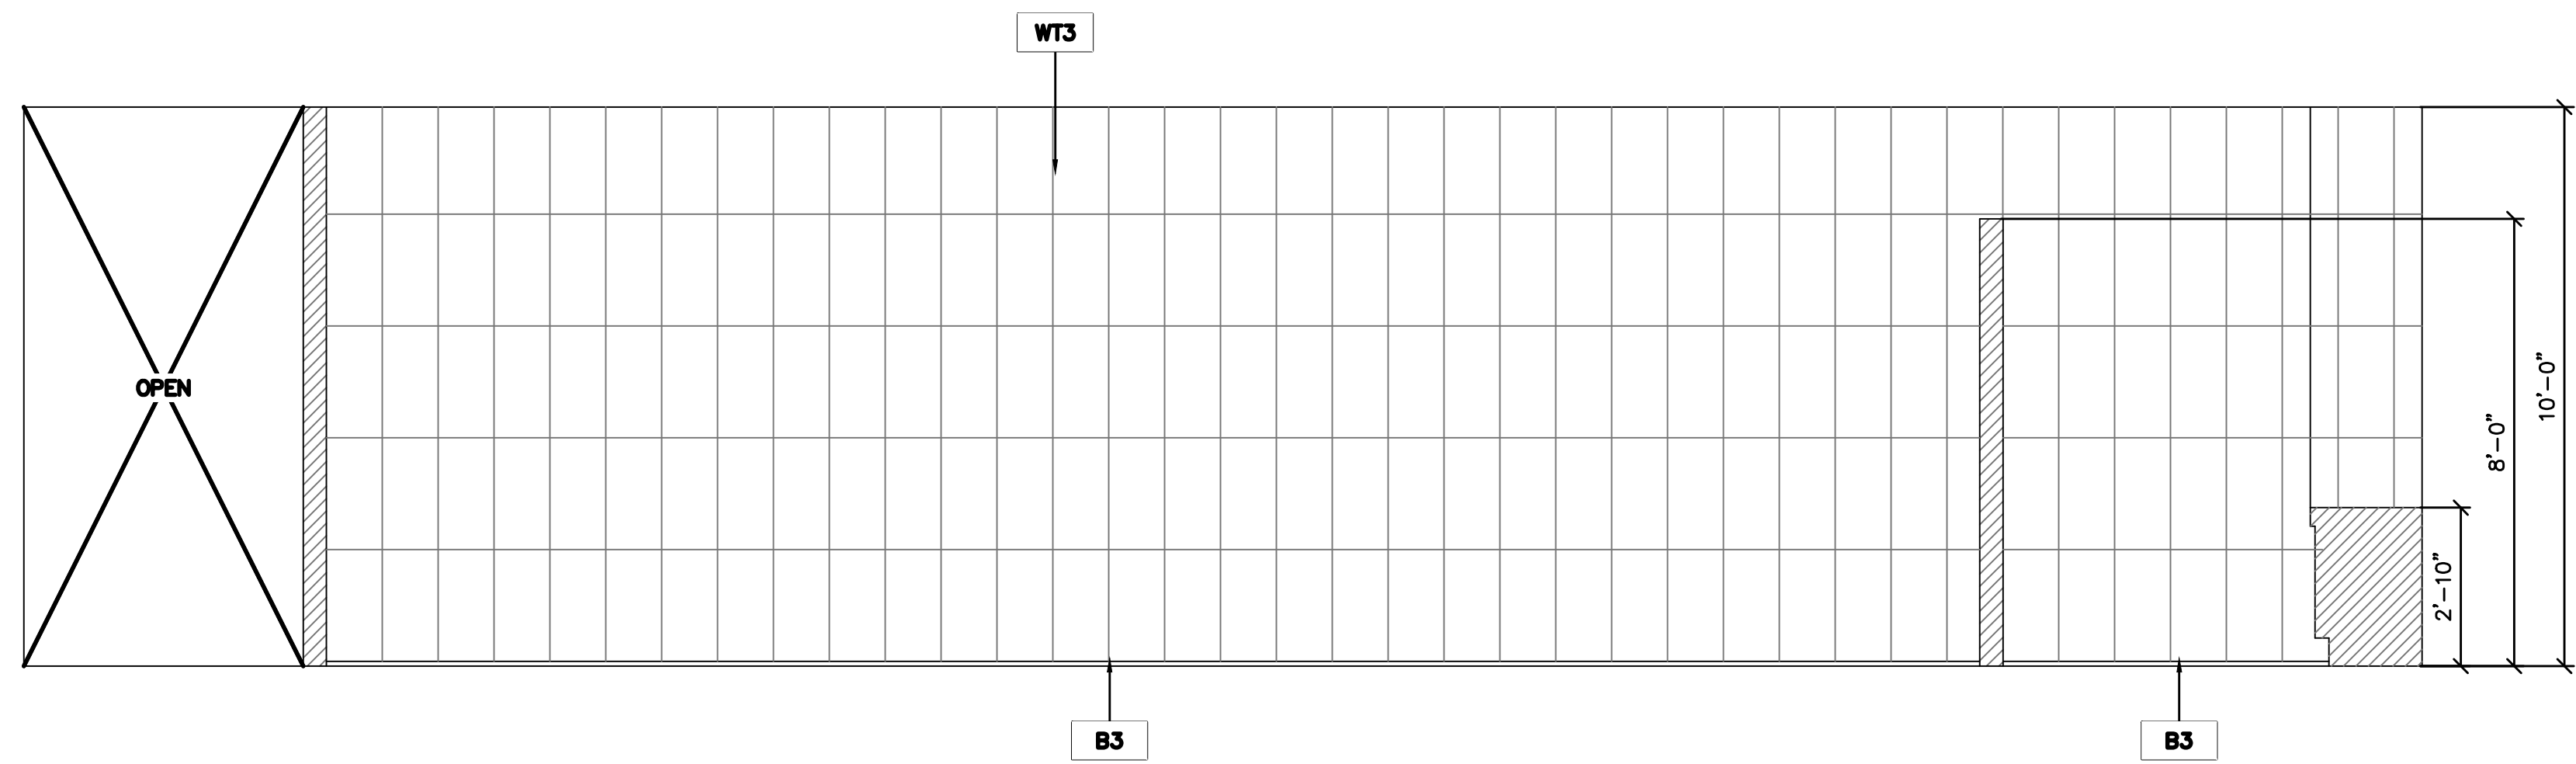

3
22
ELEVATION - WOMEN'S RESTROOM

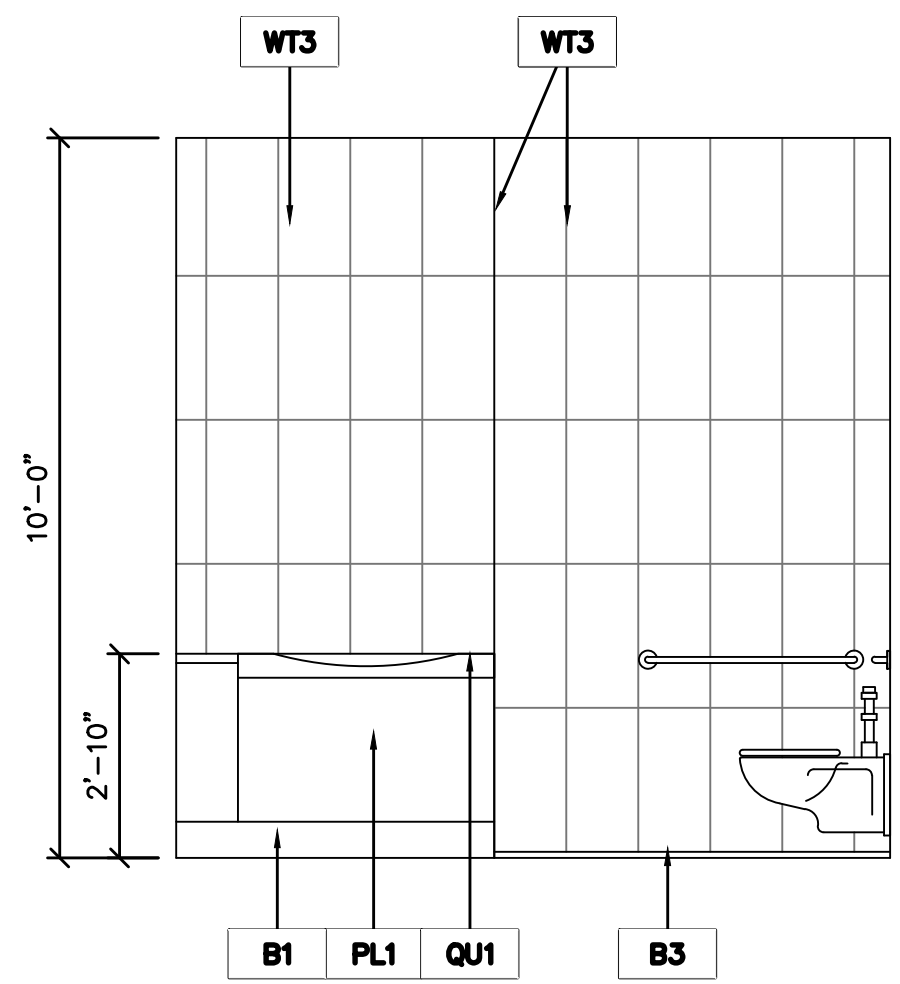


4
22
ELEVATION - WOMEN'S RESTROOM



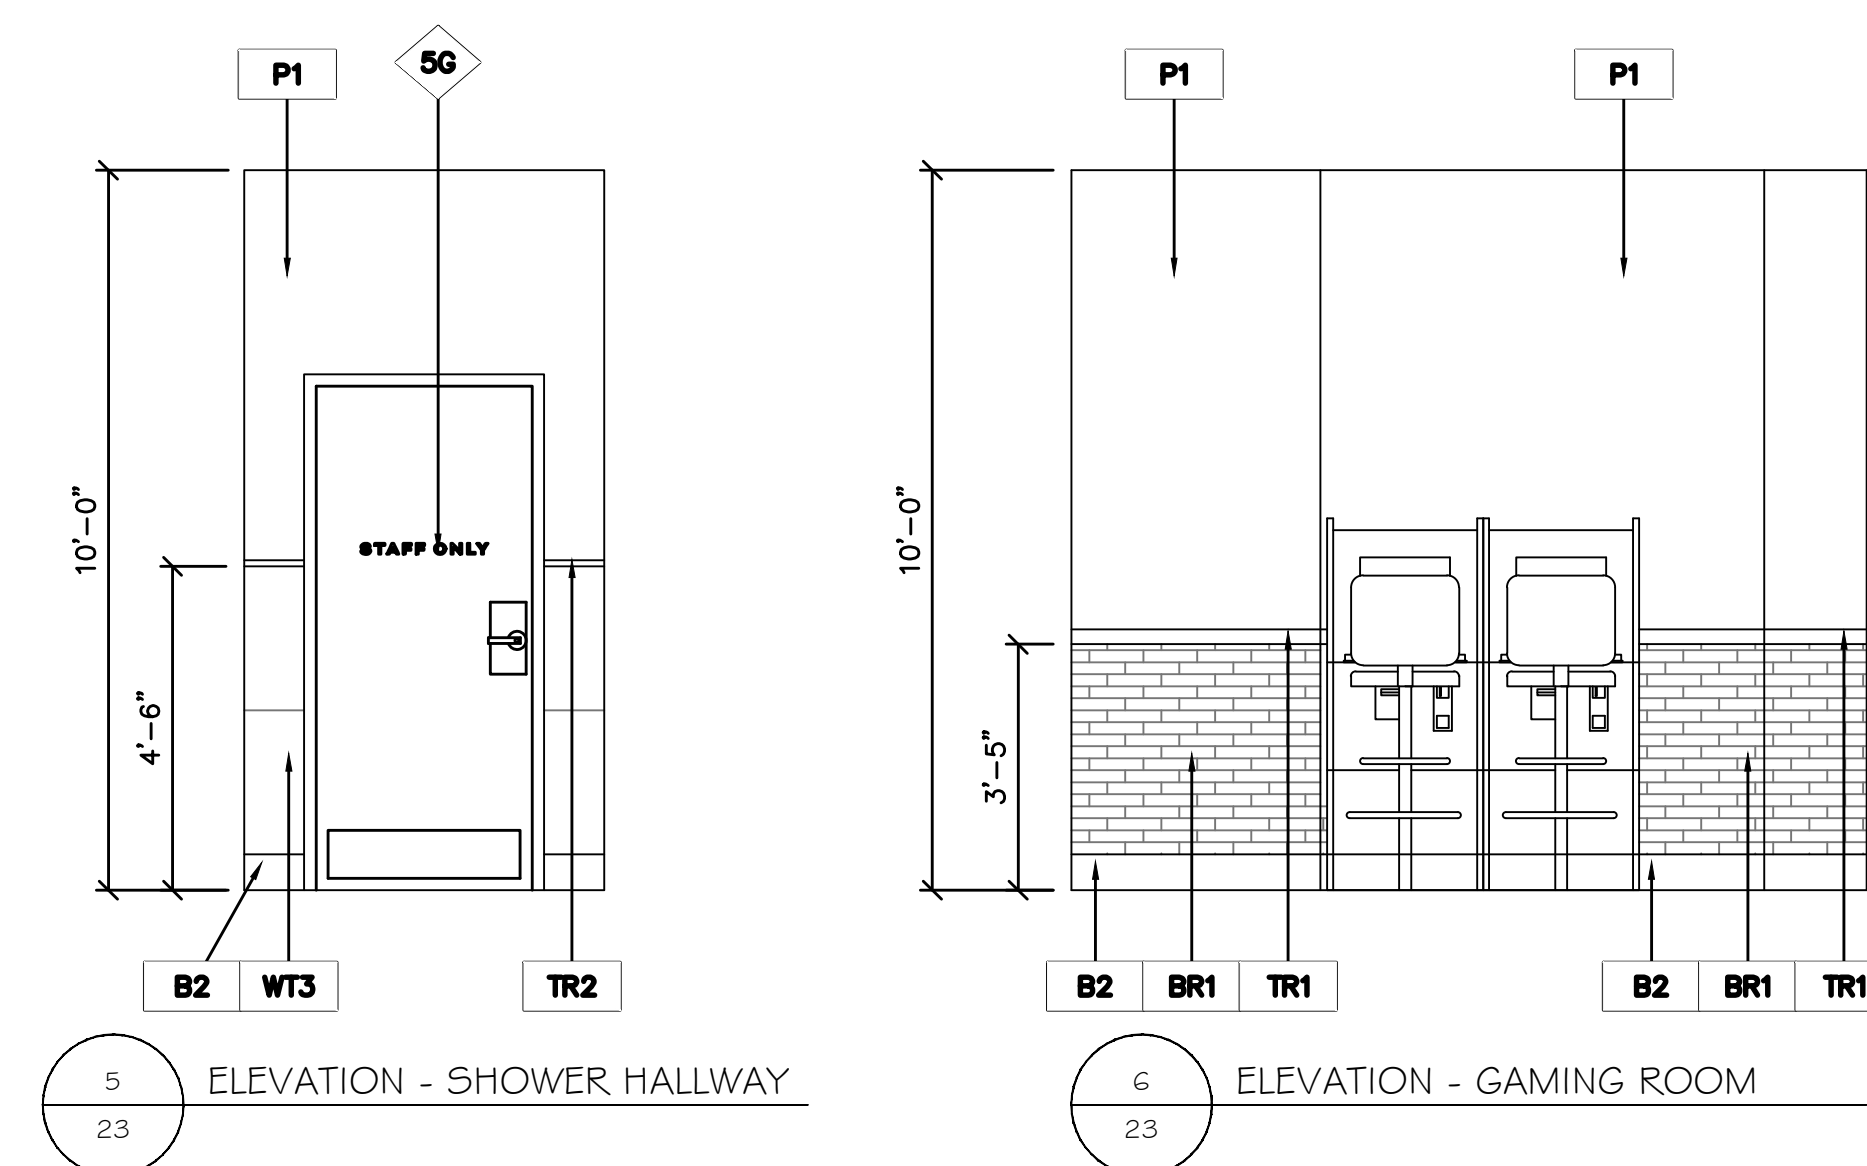
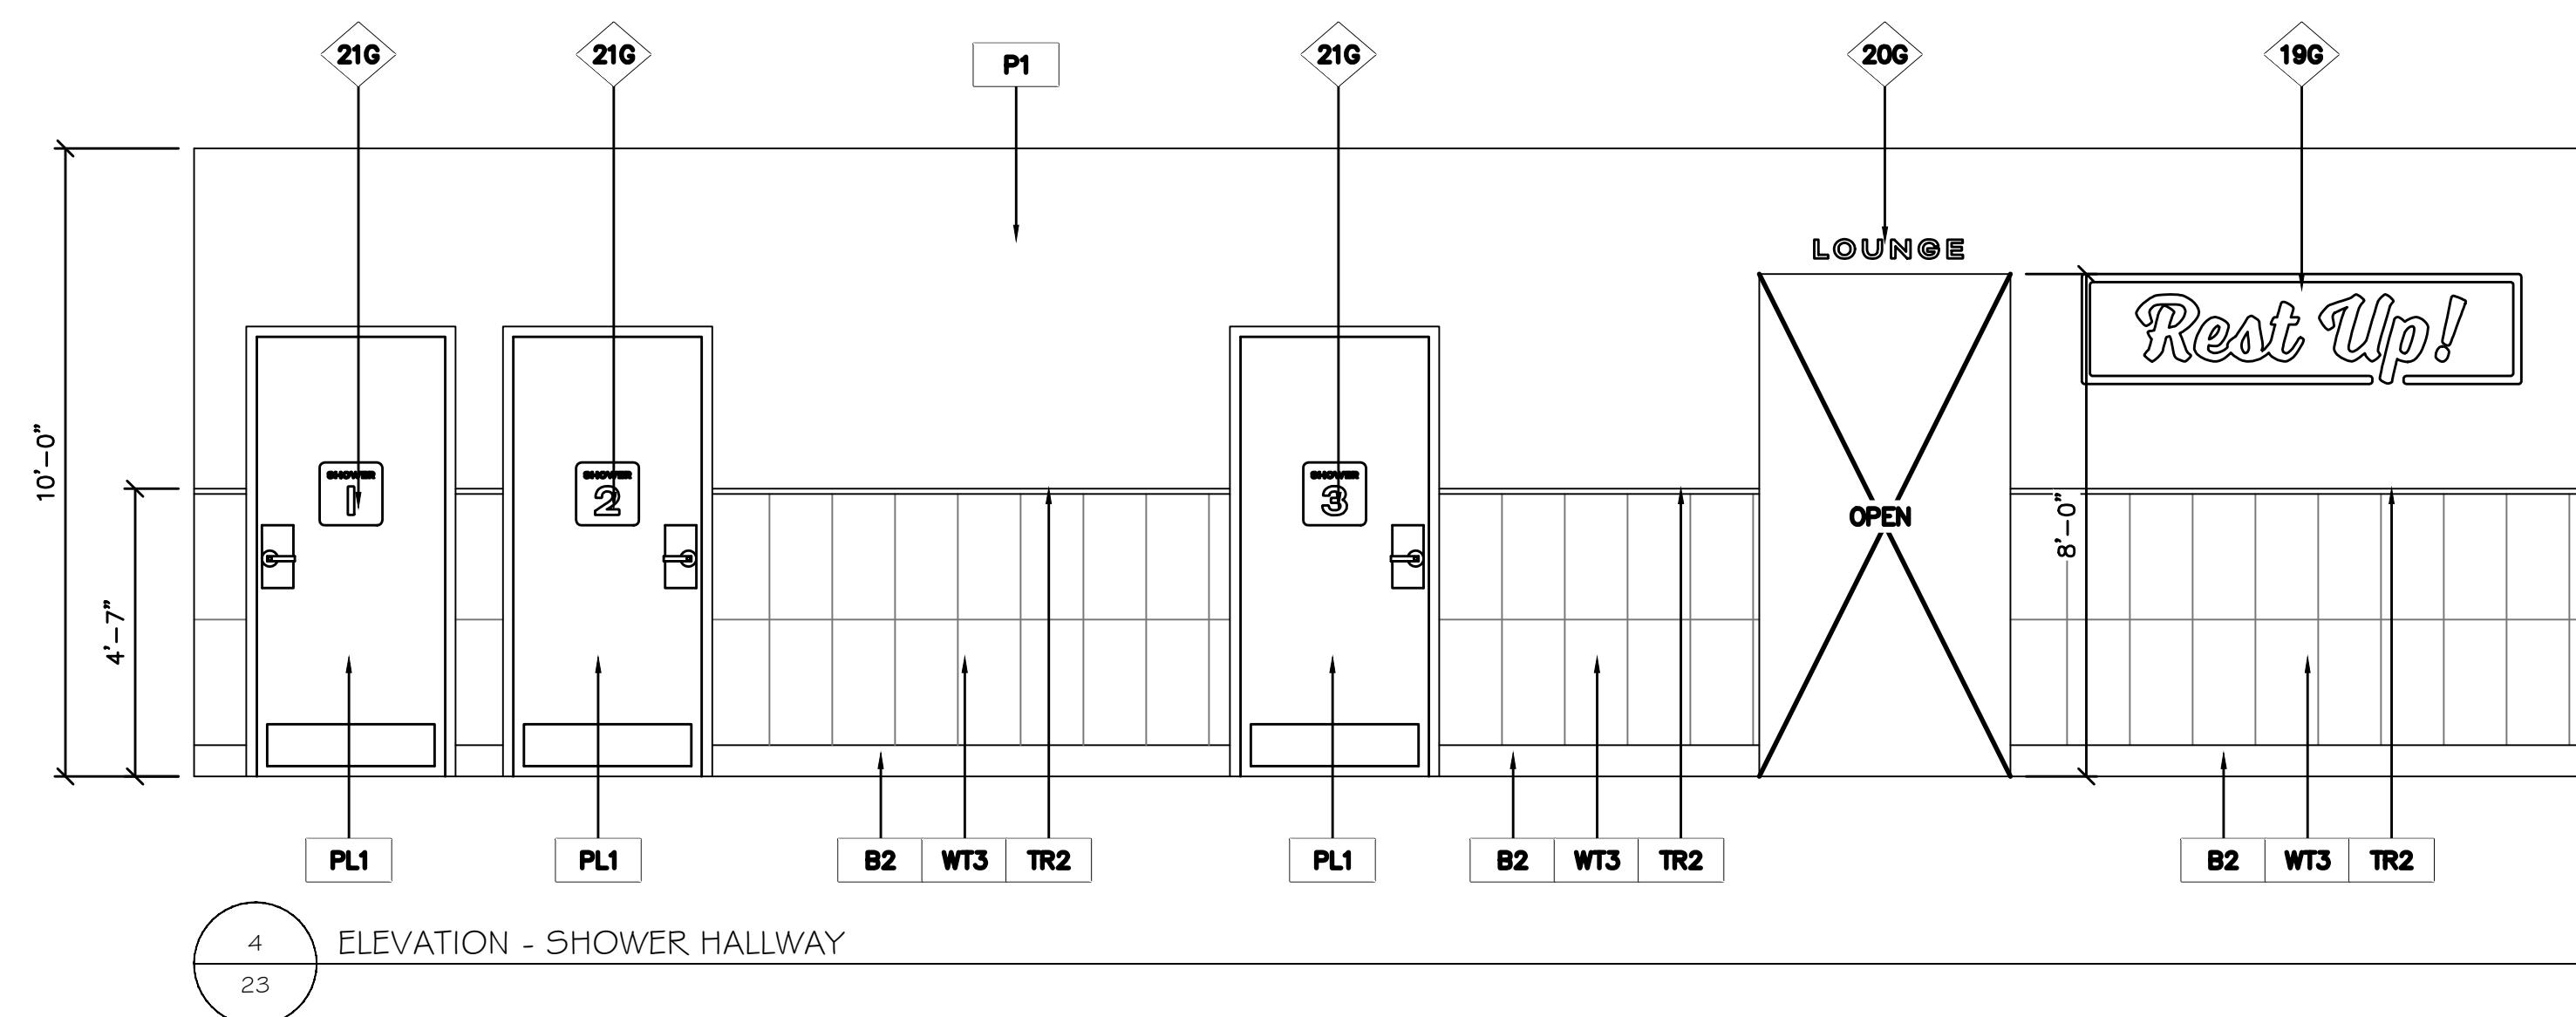
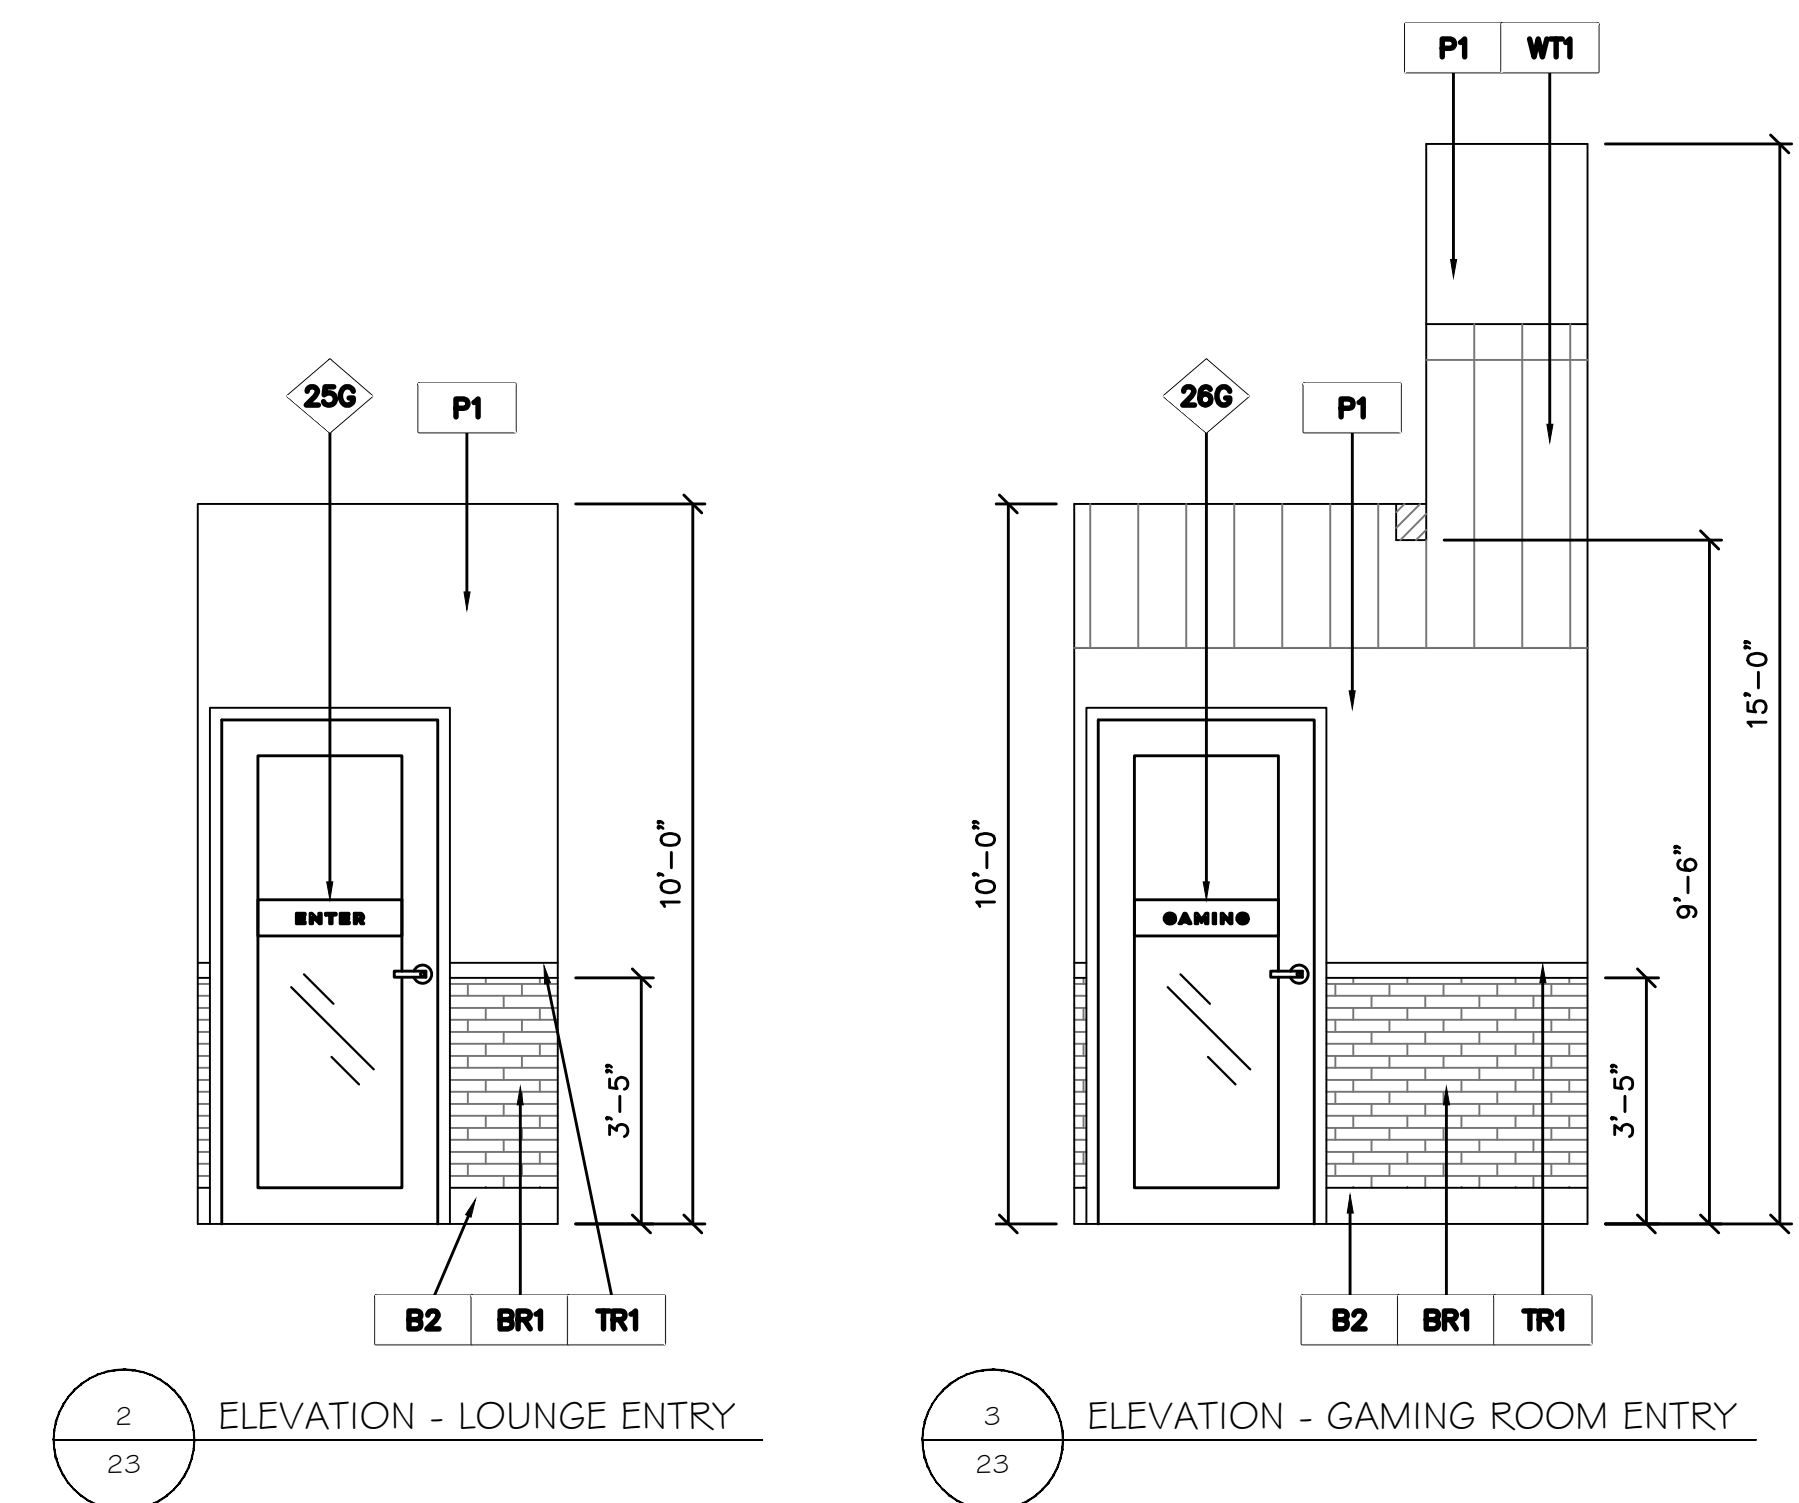
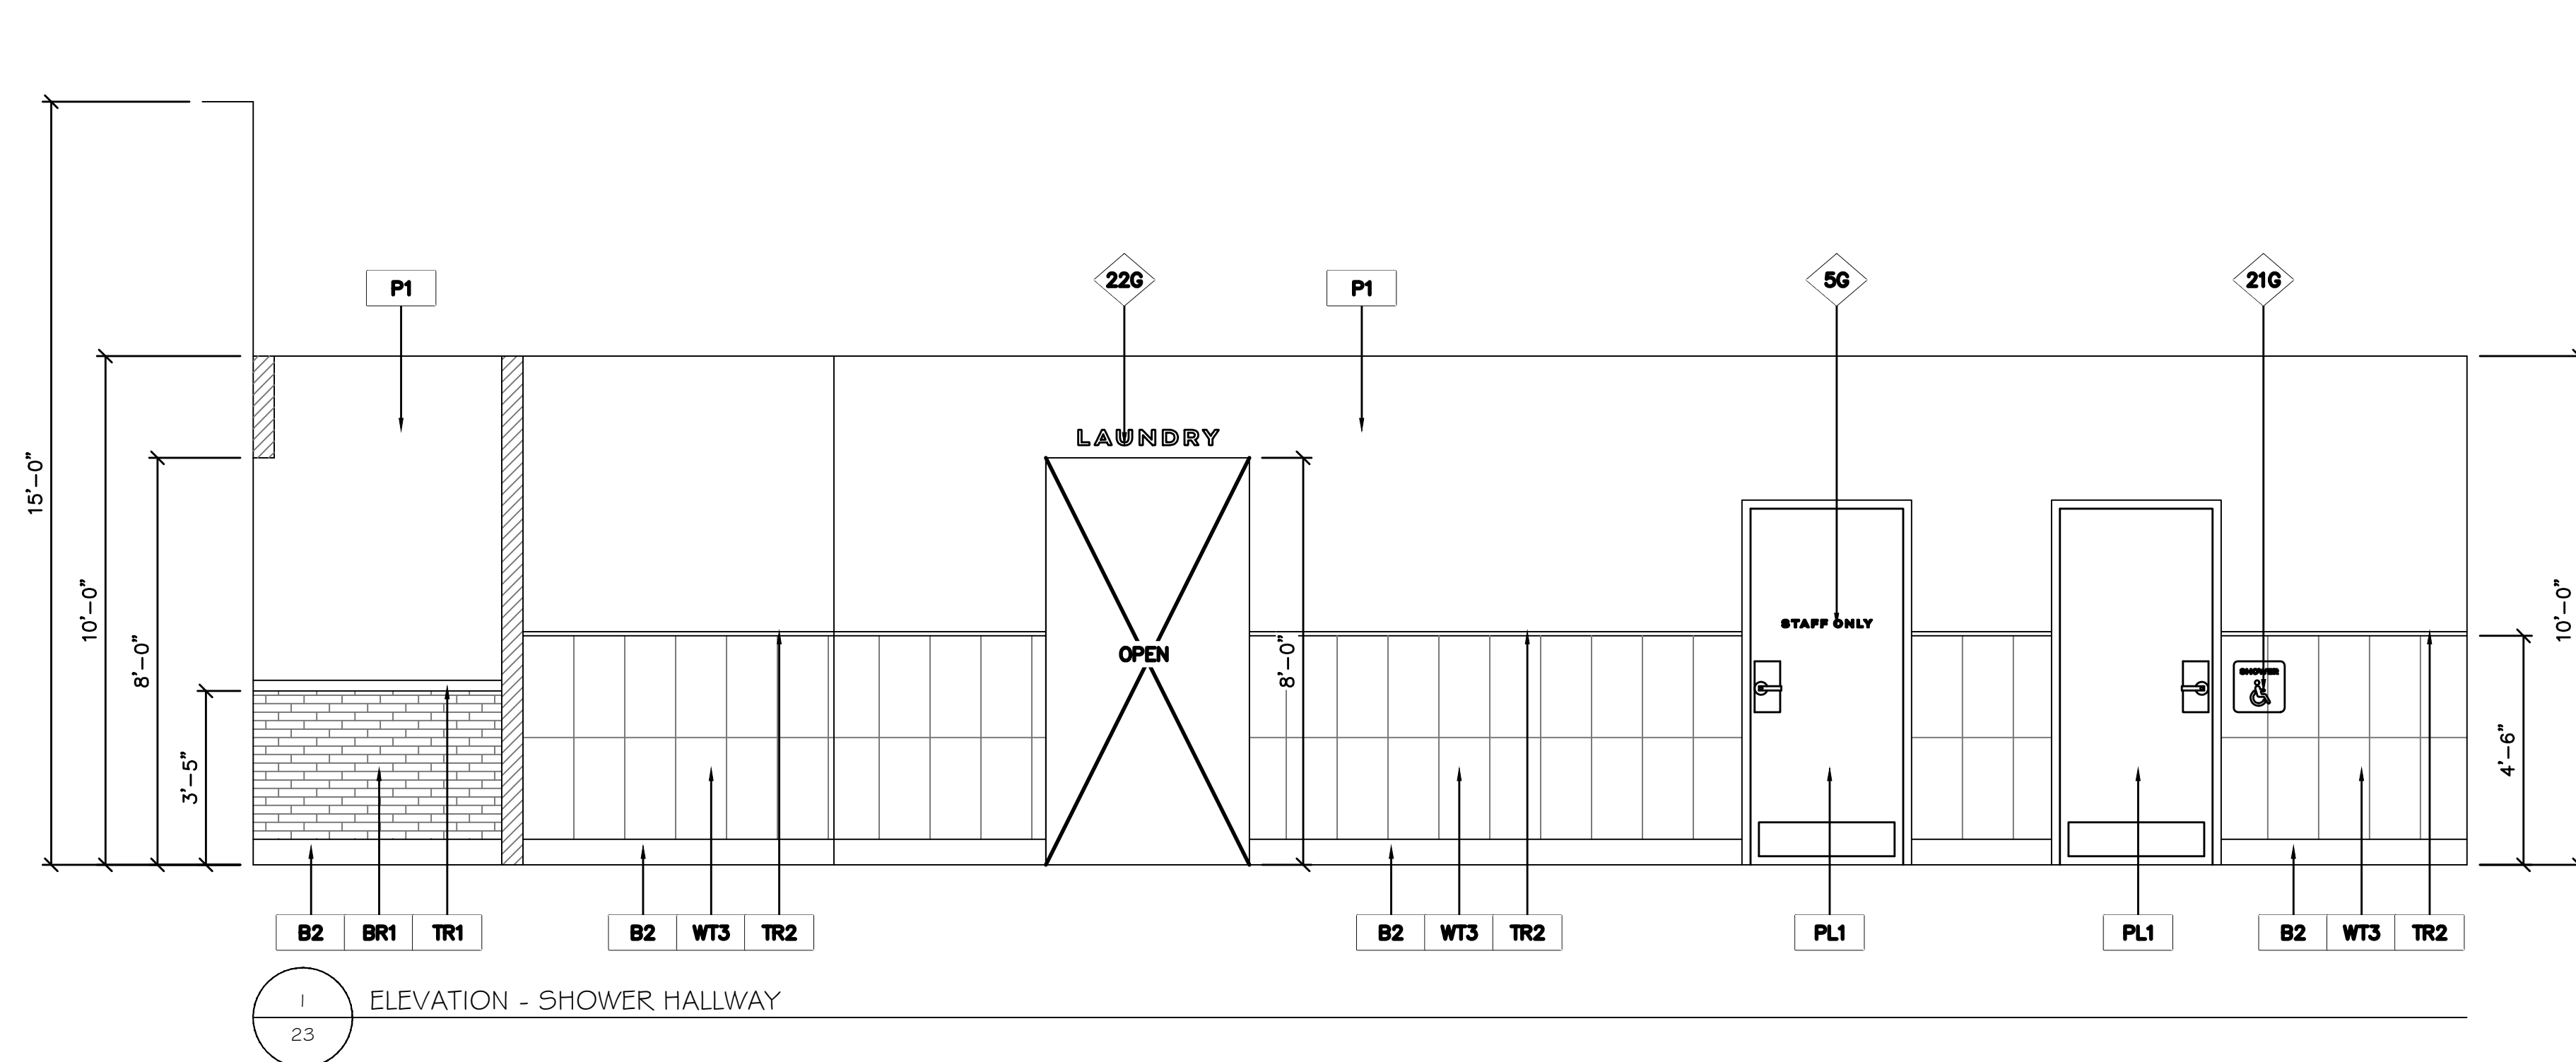










STROUD
AND COMPANY

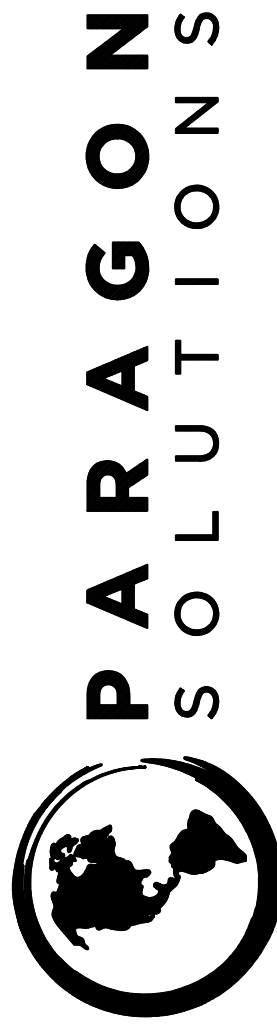

201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-827-7171

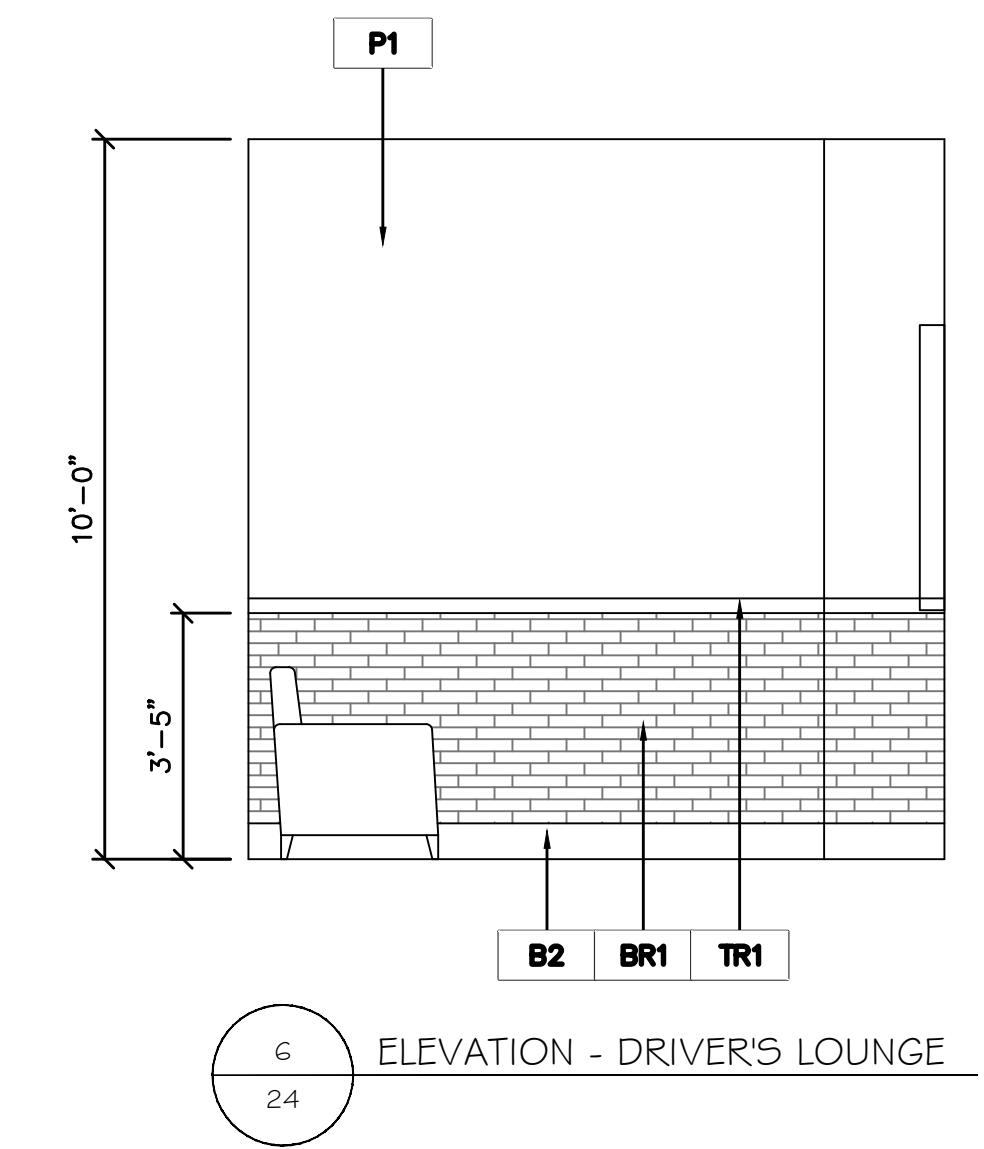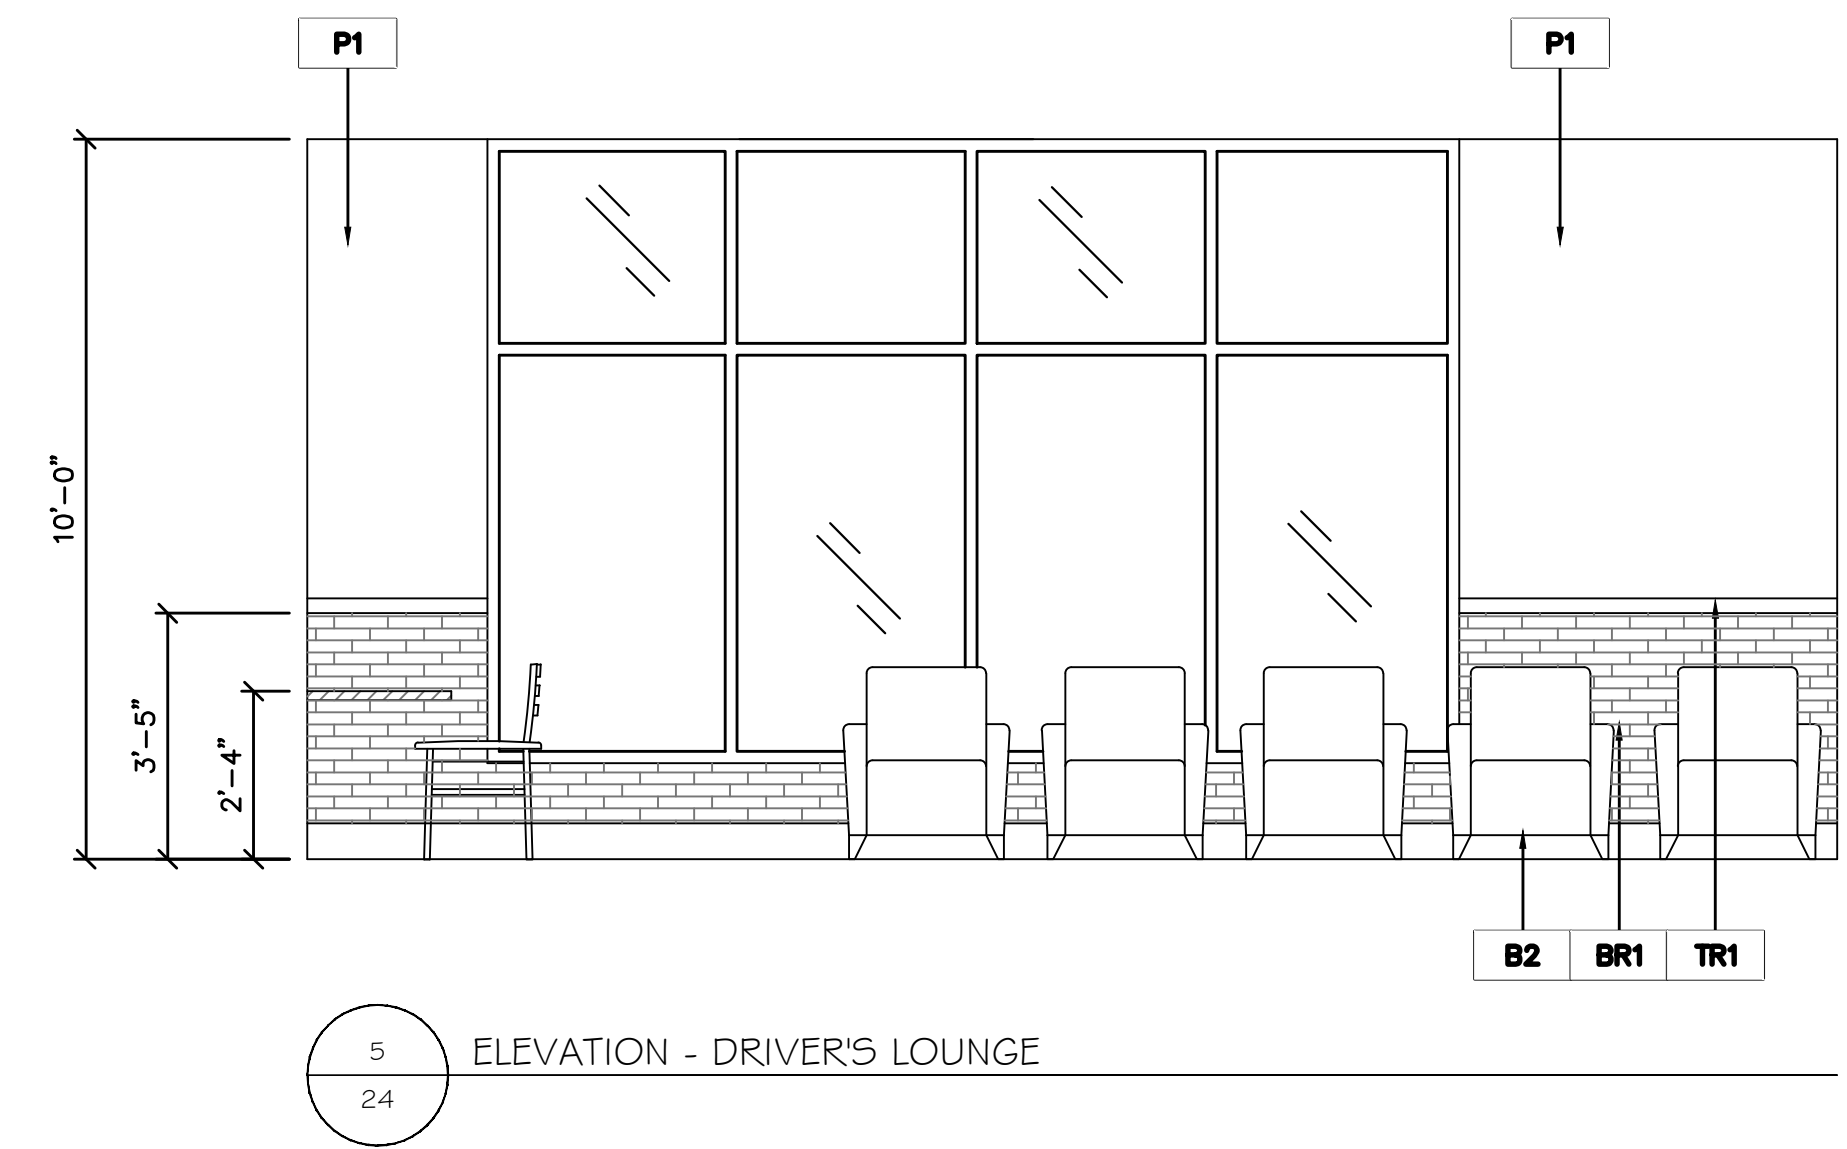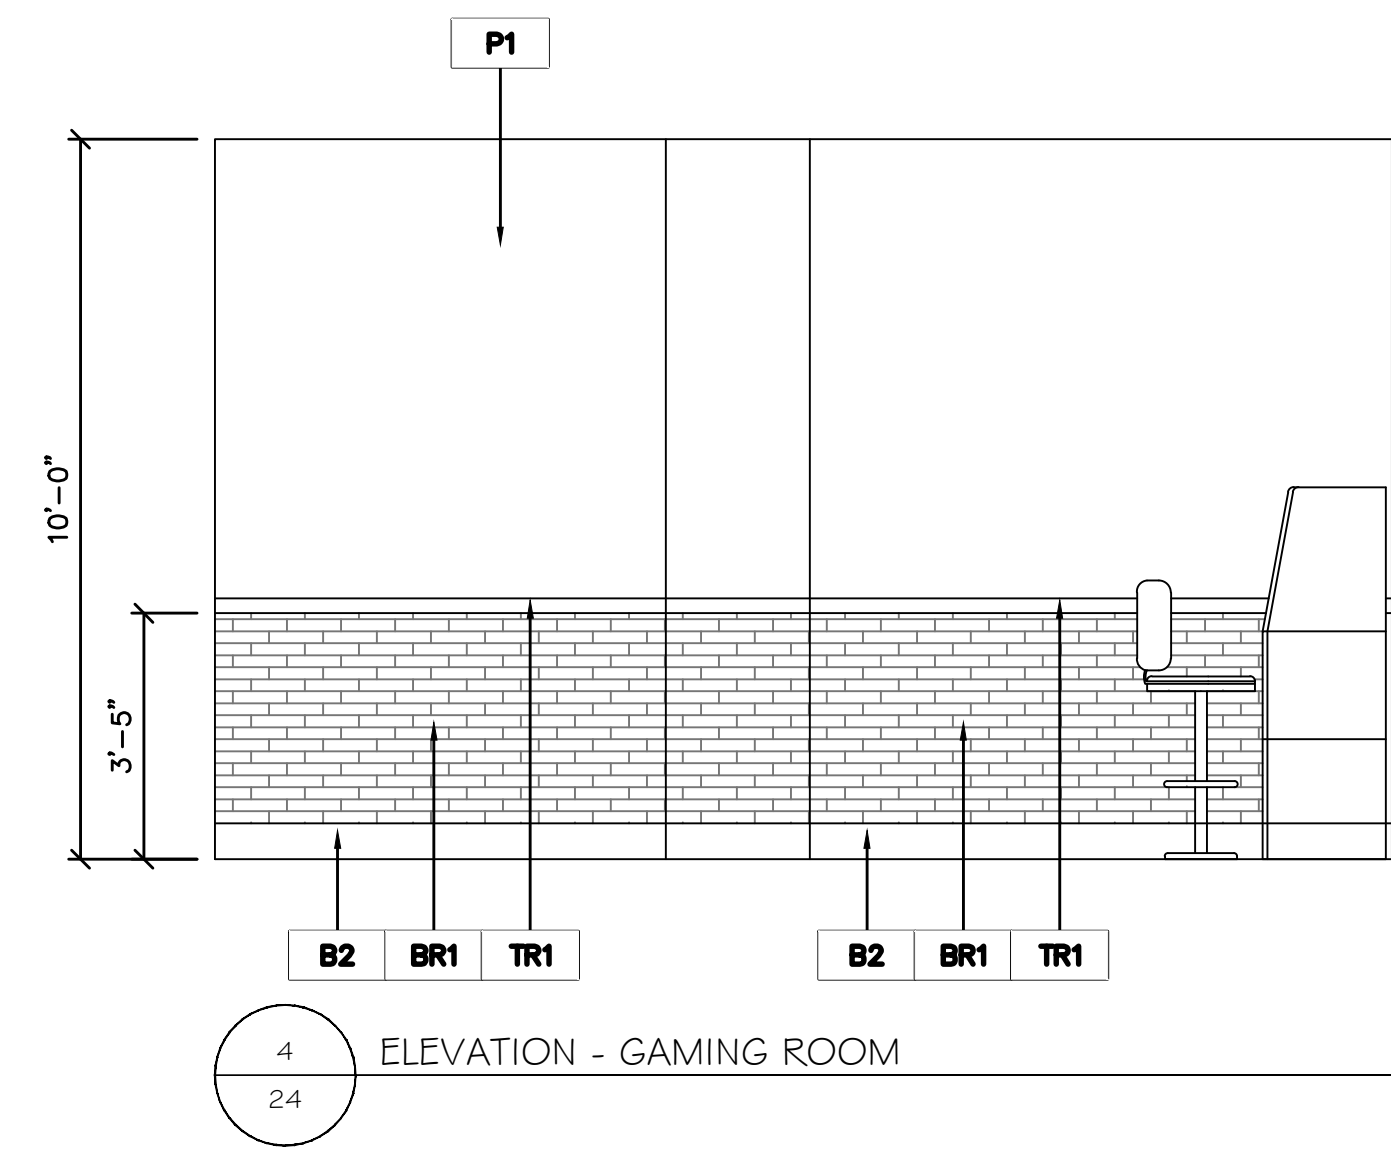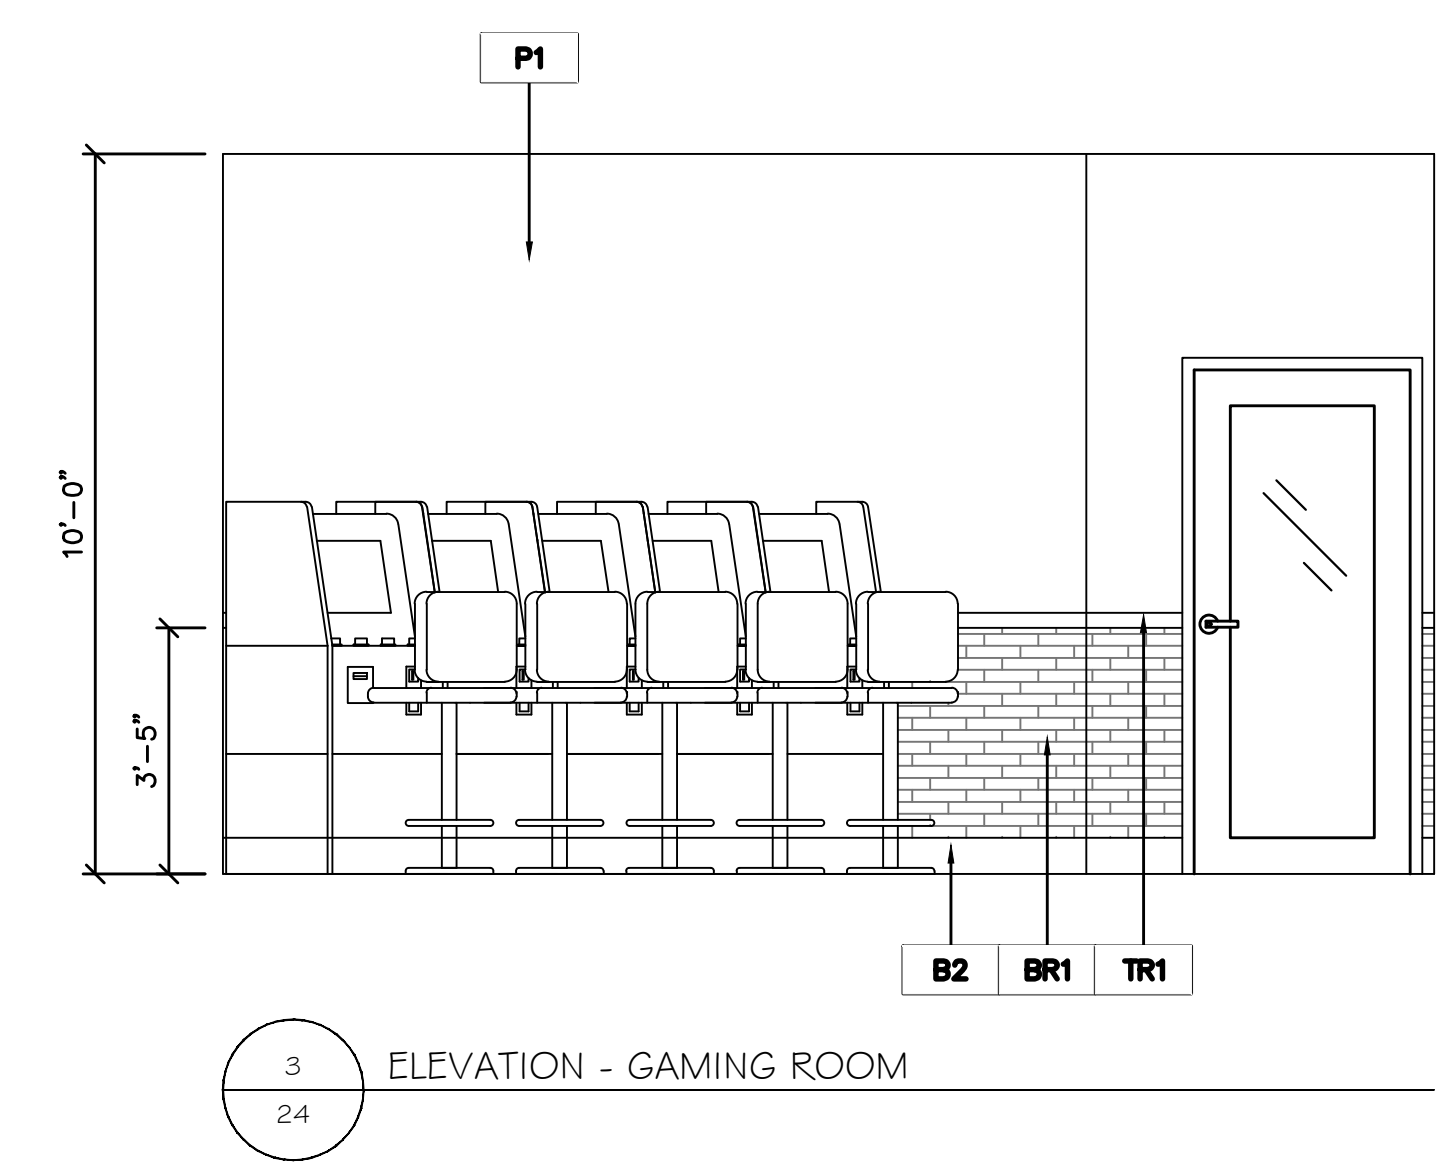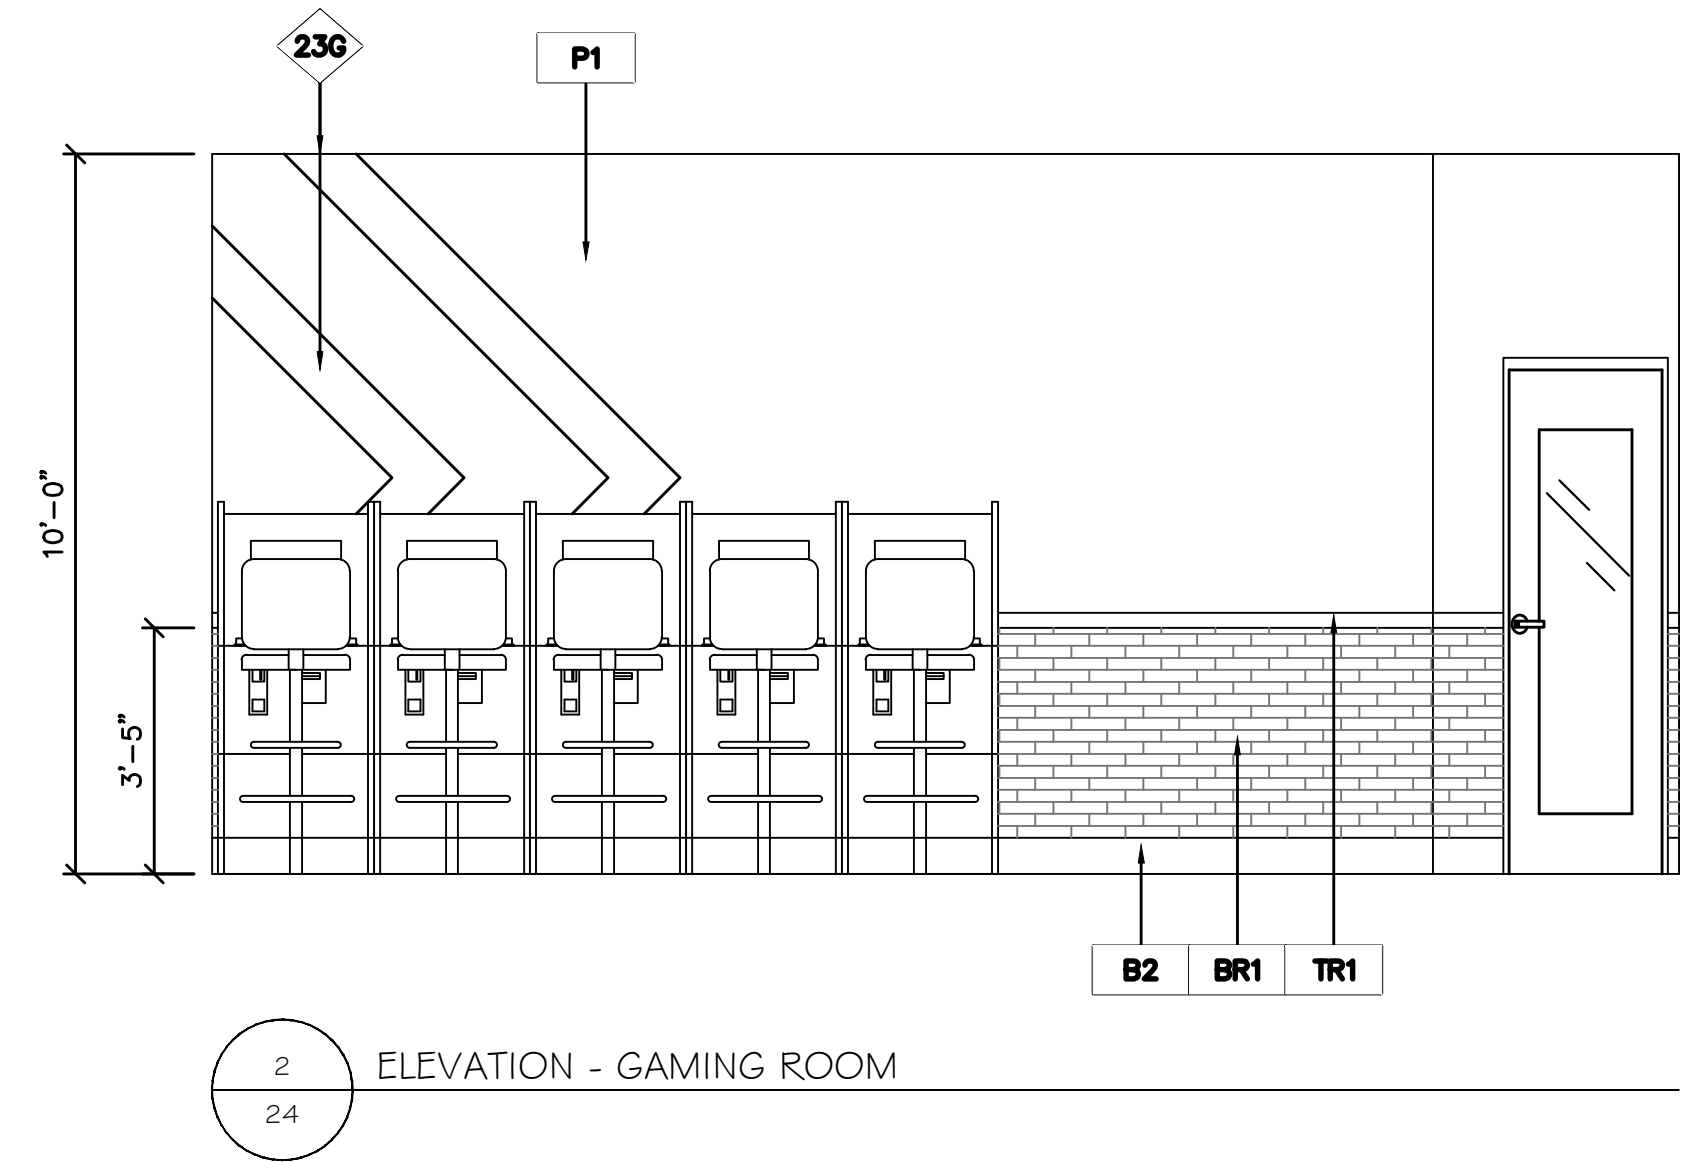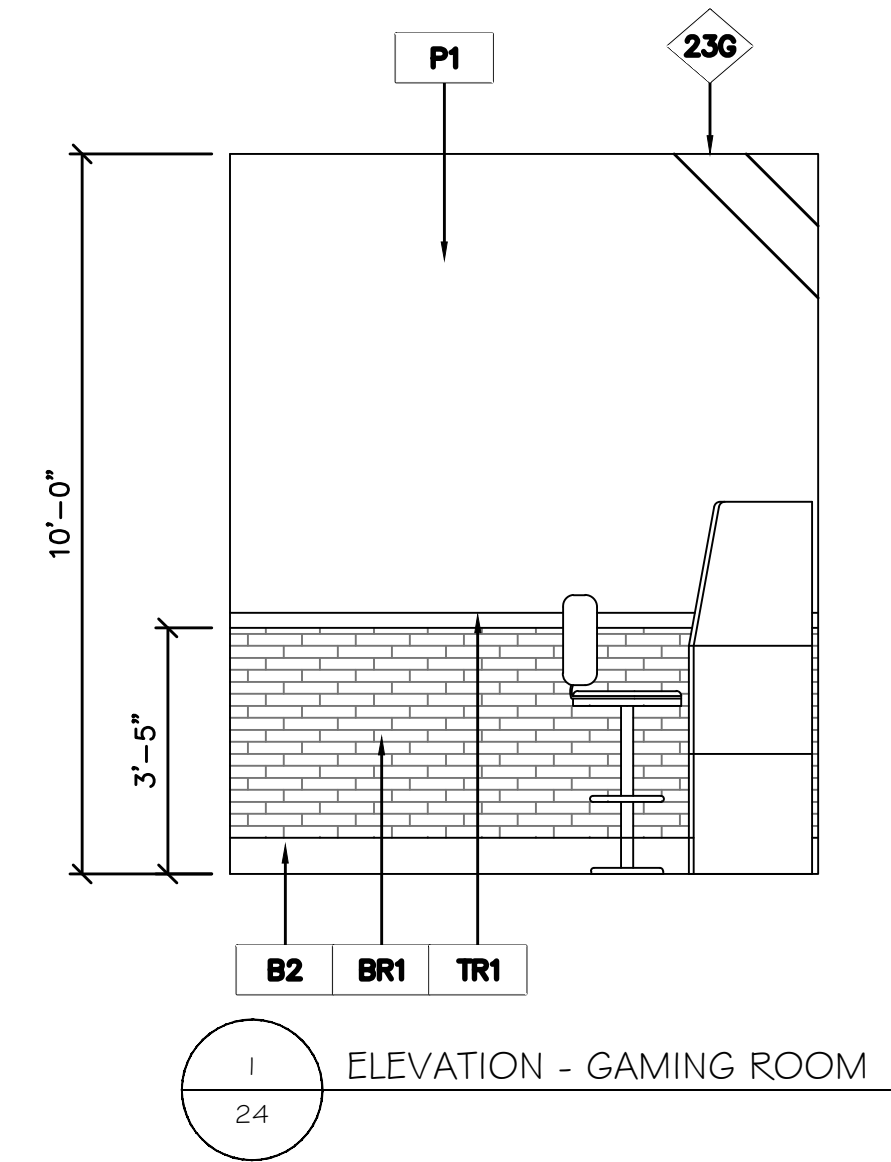

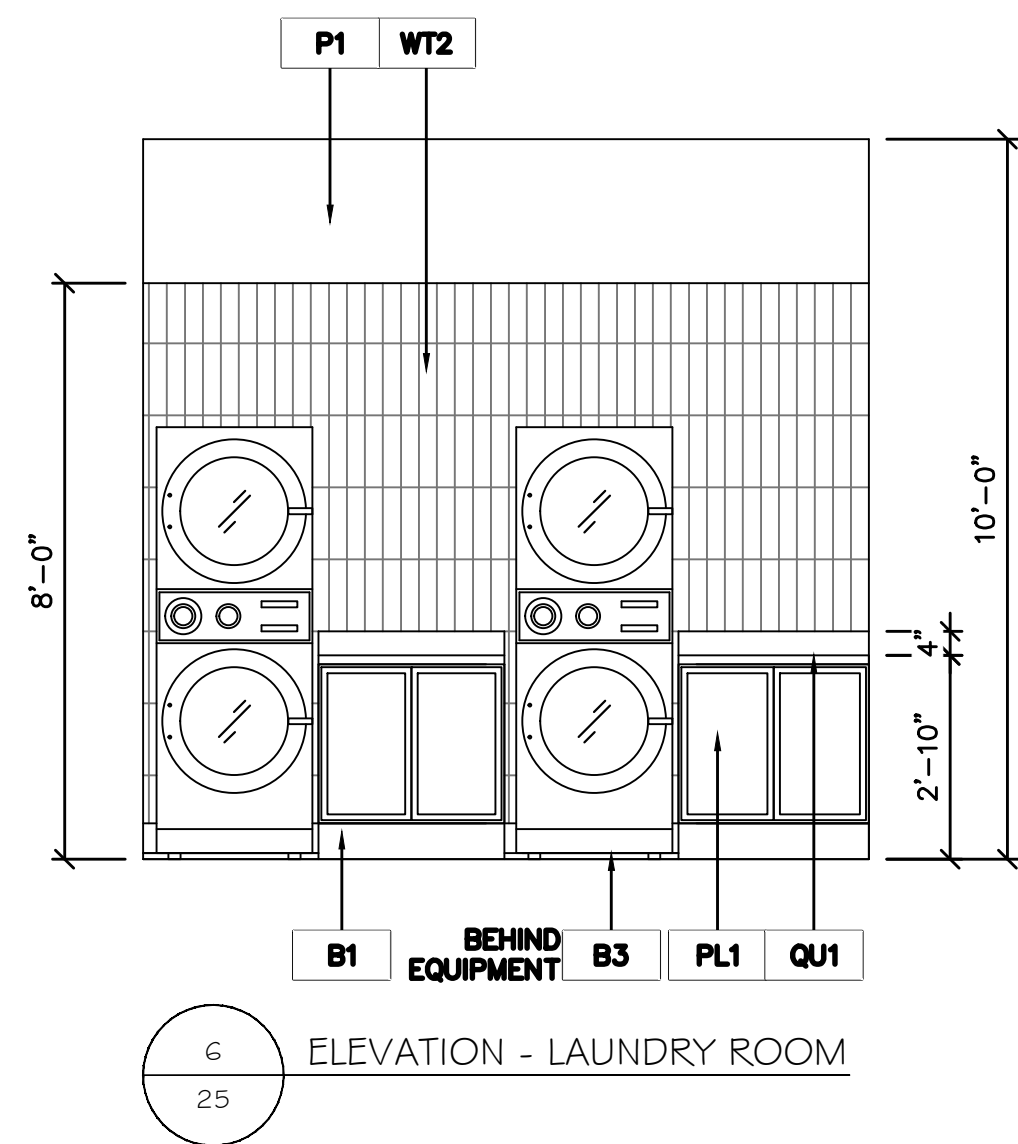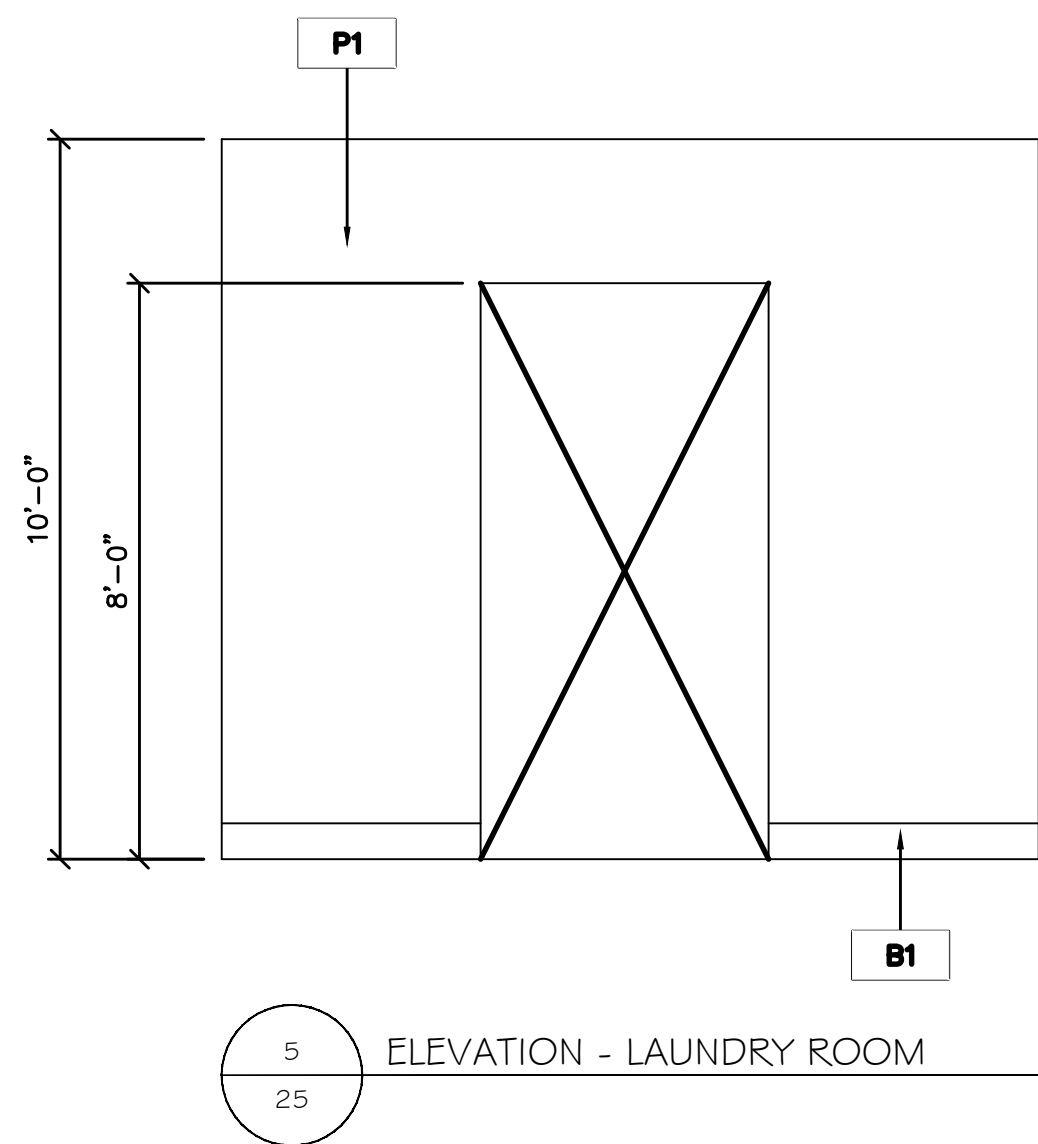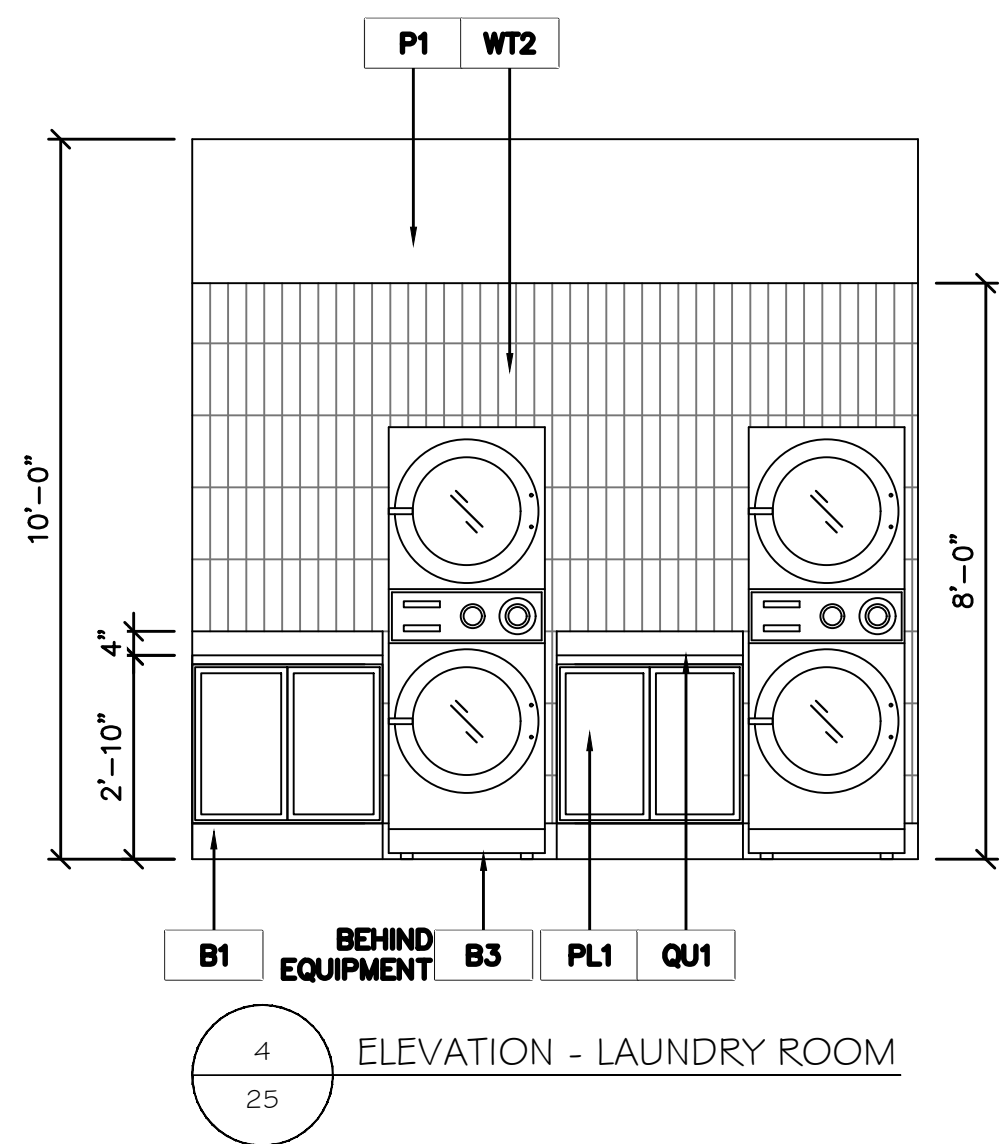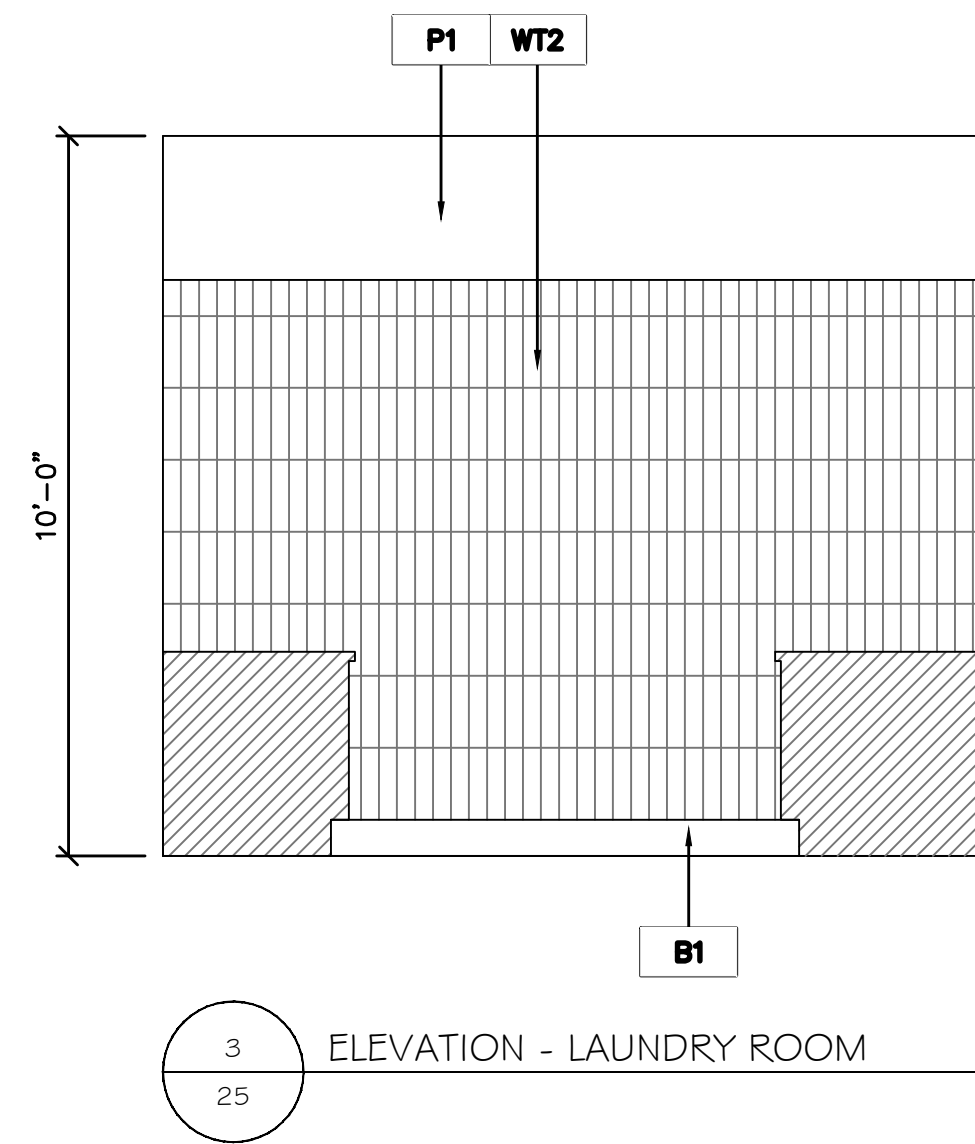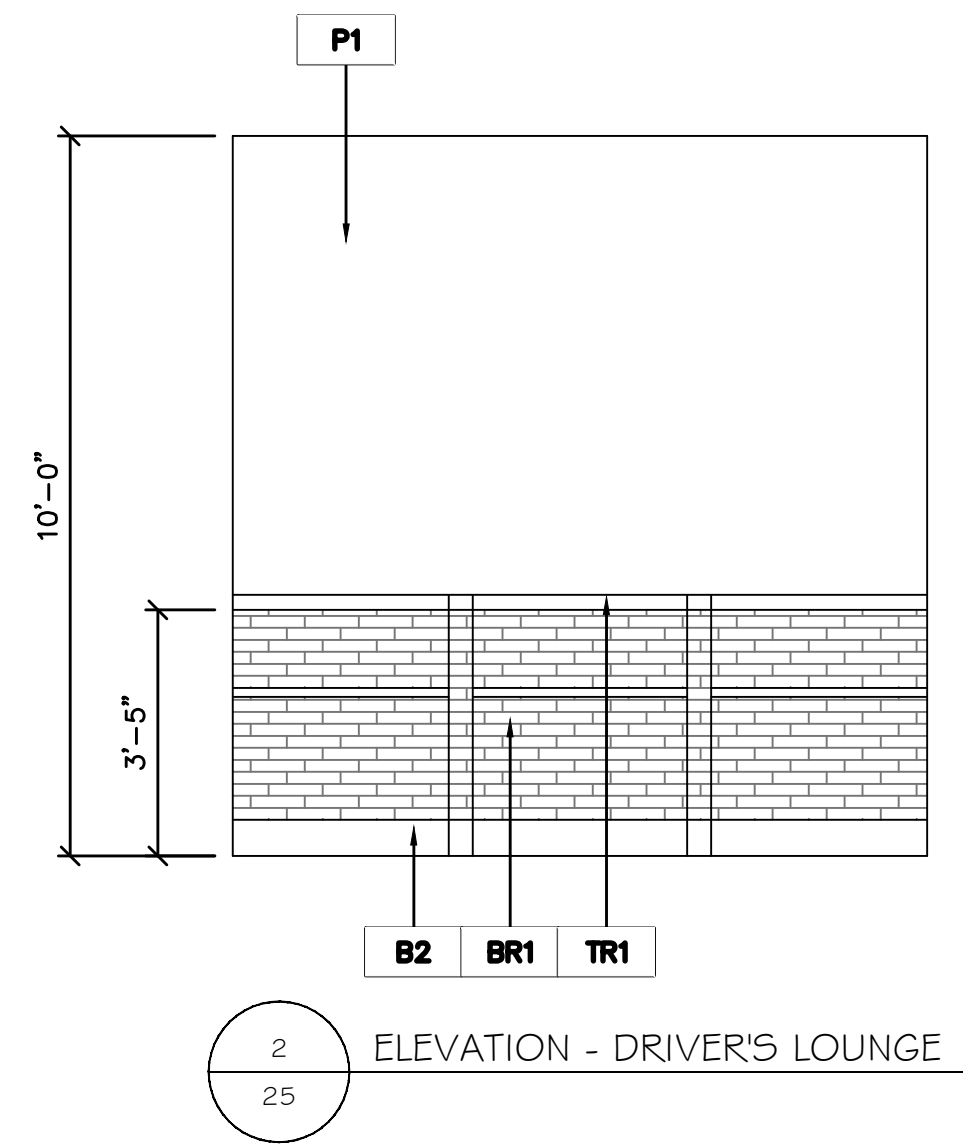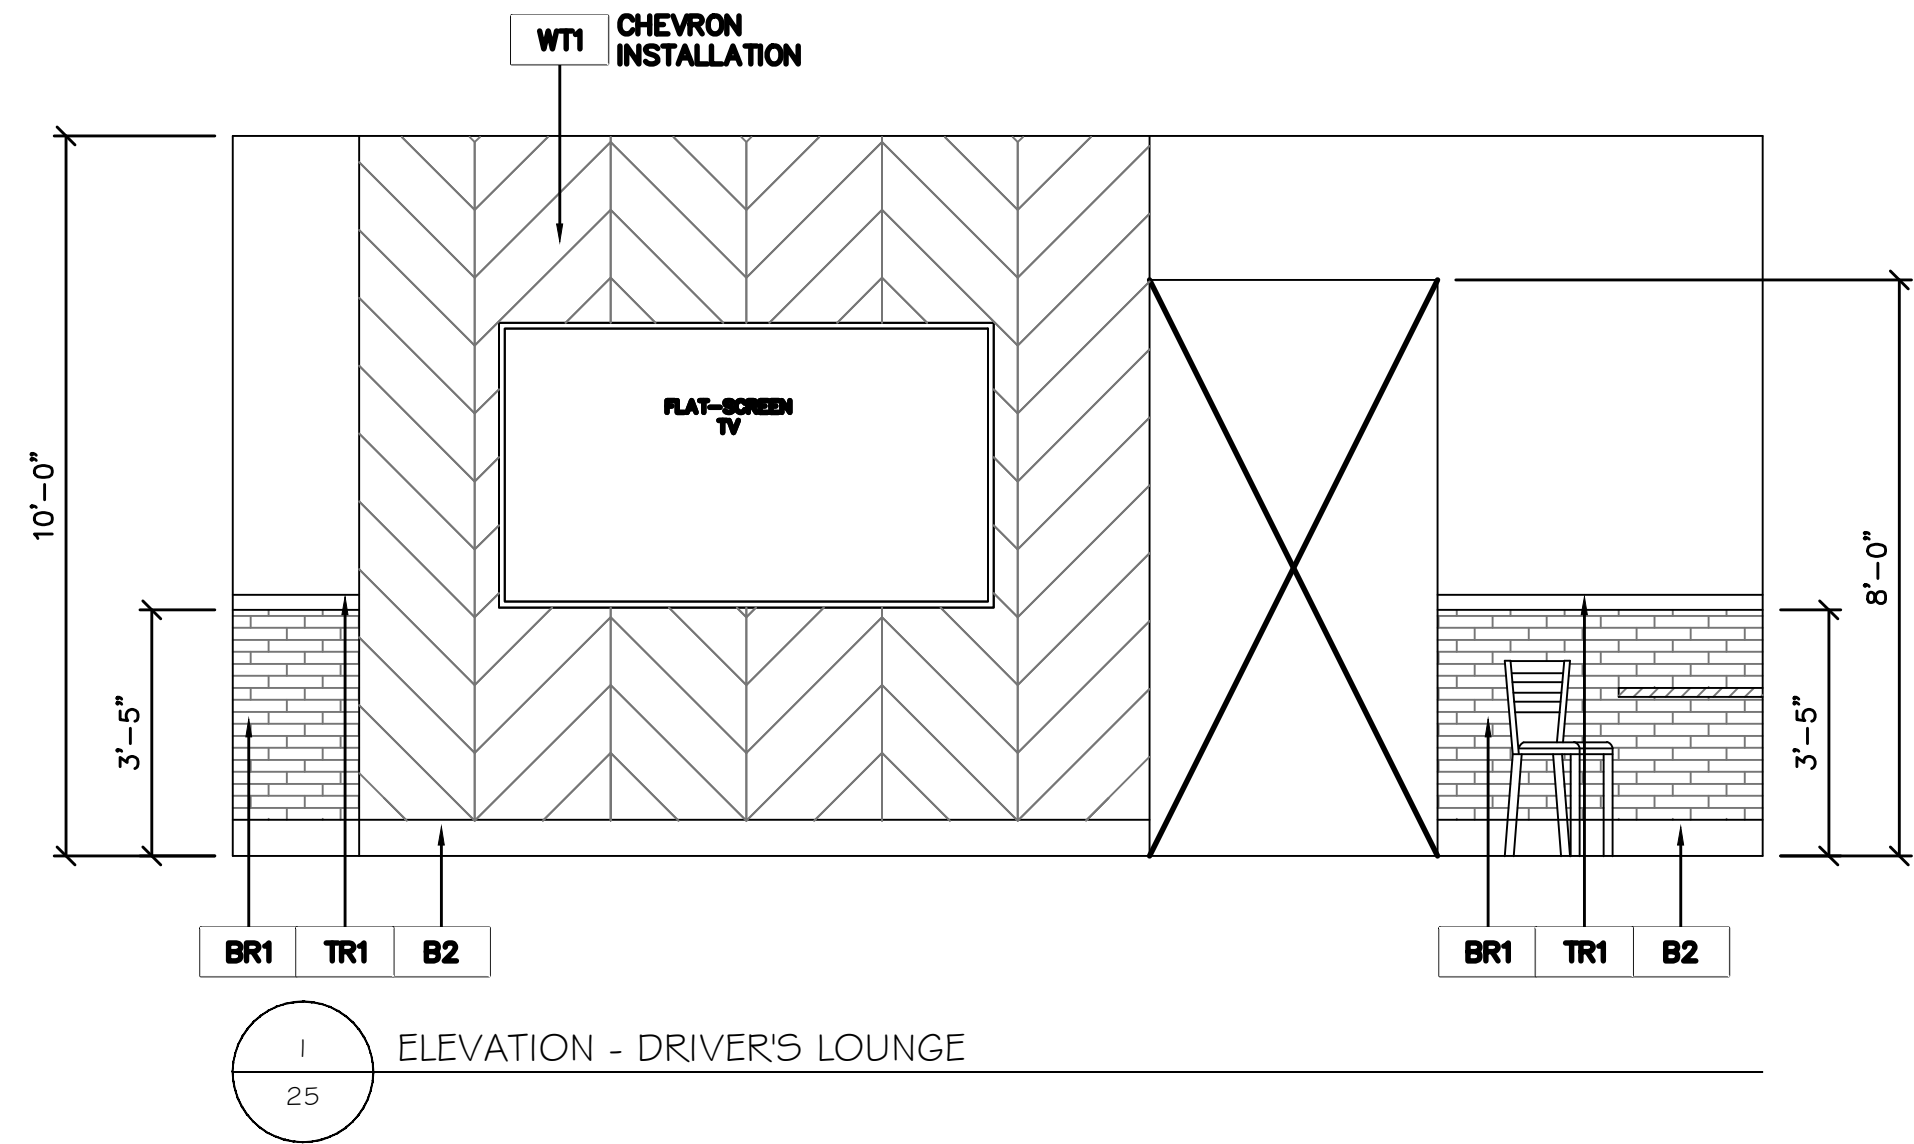




STROUD
AND COMPANY


P A R A G O N
S O L U T I O N S




201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-927-7171

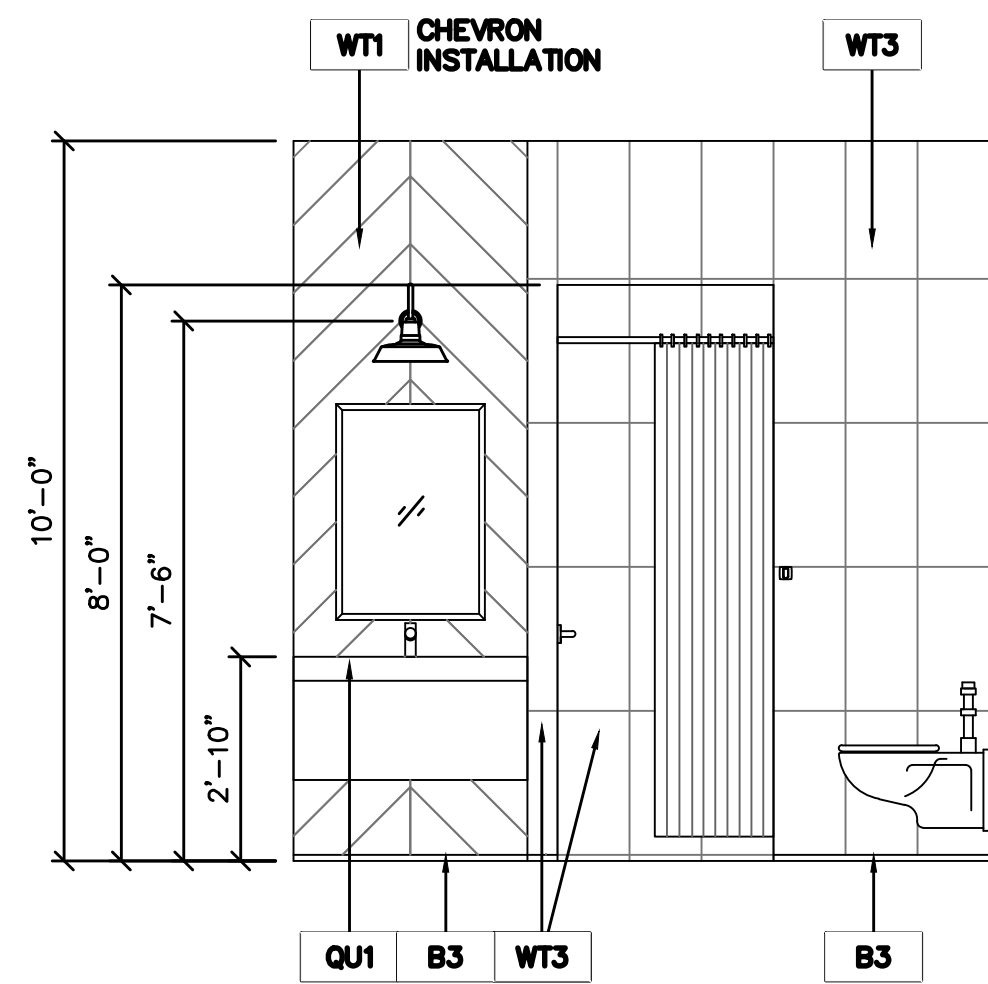


1
26 ELEVATION - TYPICAL SHOWER

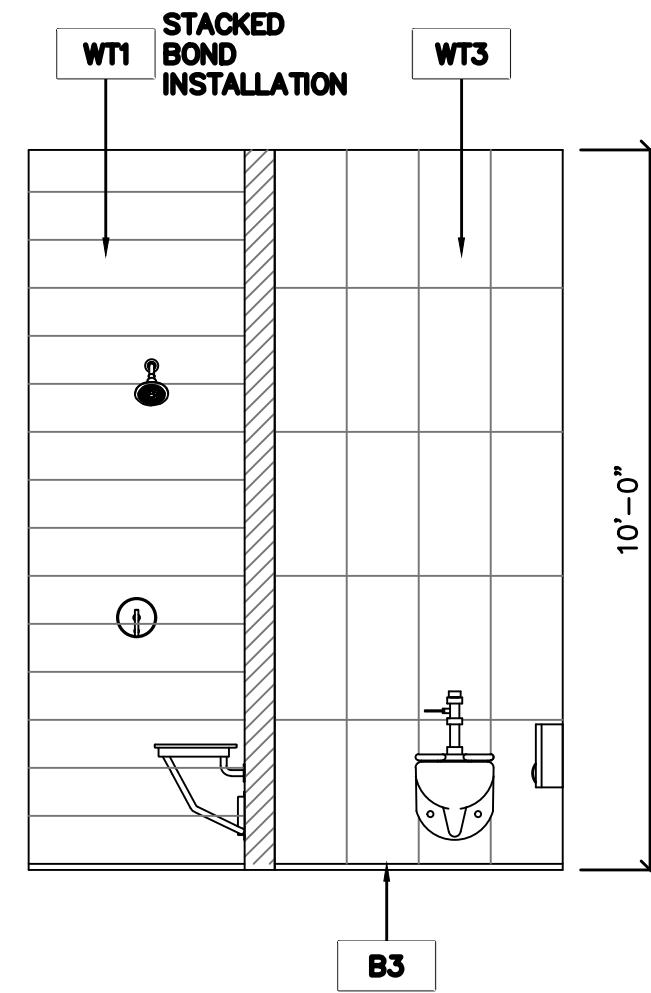


2
26 ELEVATION - TYPICAL SHOWER

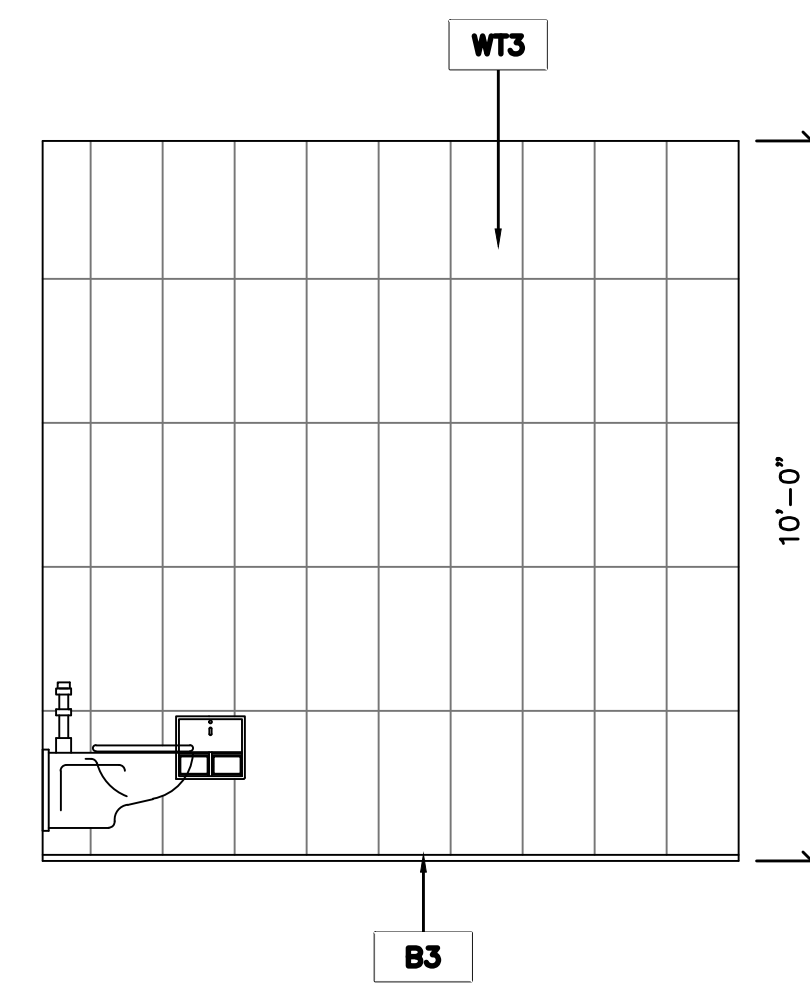


3
26 ELEVATION - TYPICAL SHOWER

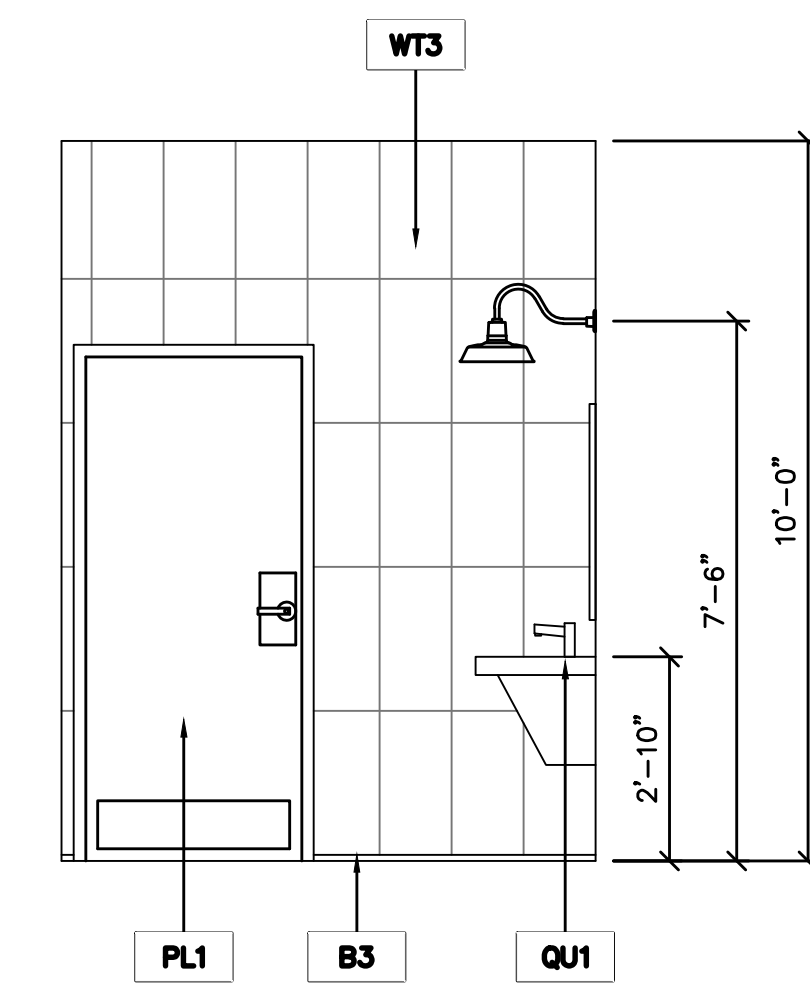


4
26 ELEVATION - TYPICAL SHOWER

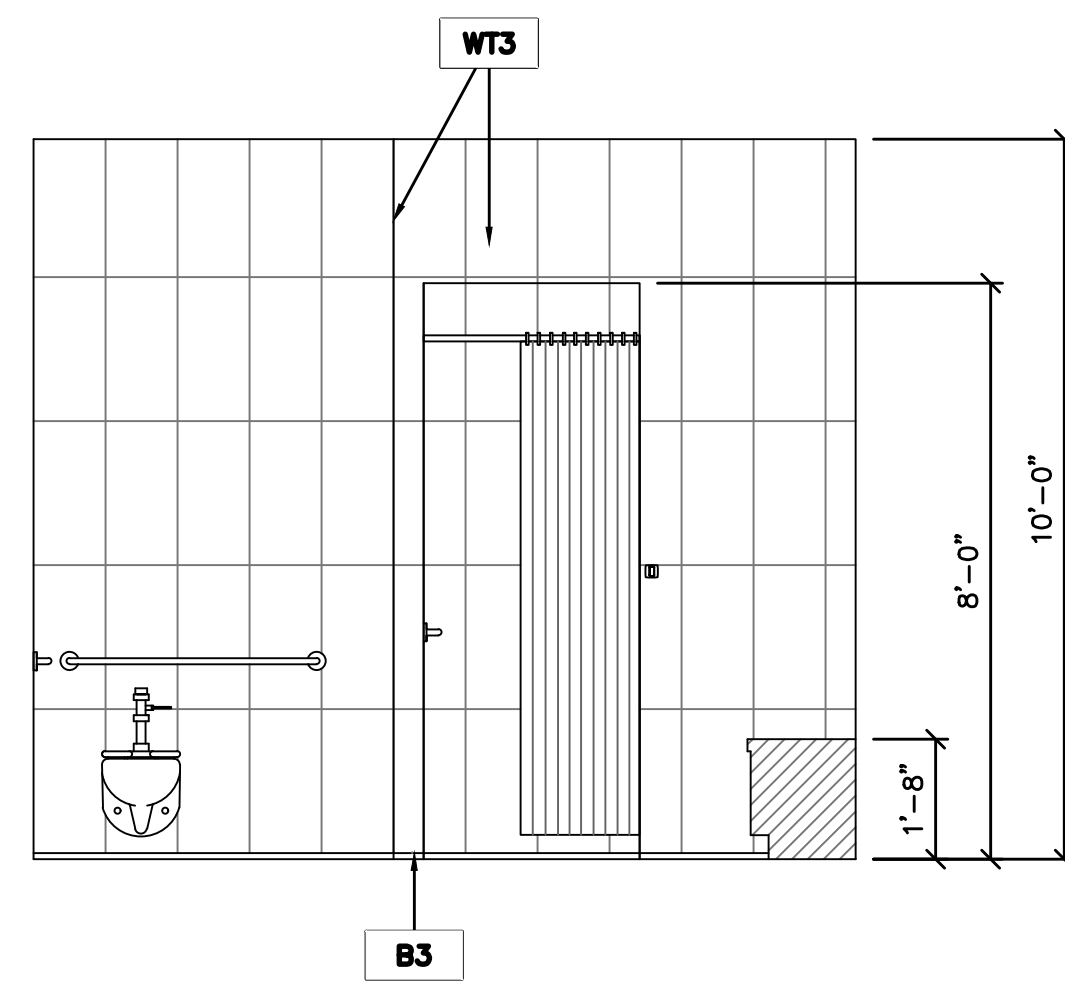


5
26 ELEVATION - ADA SHOWER

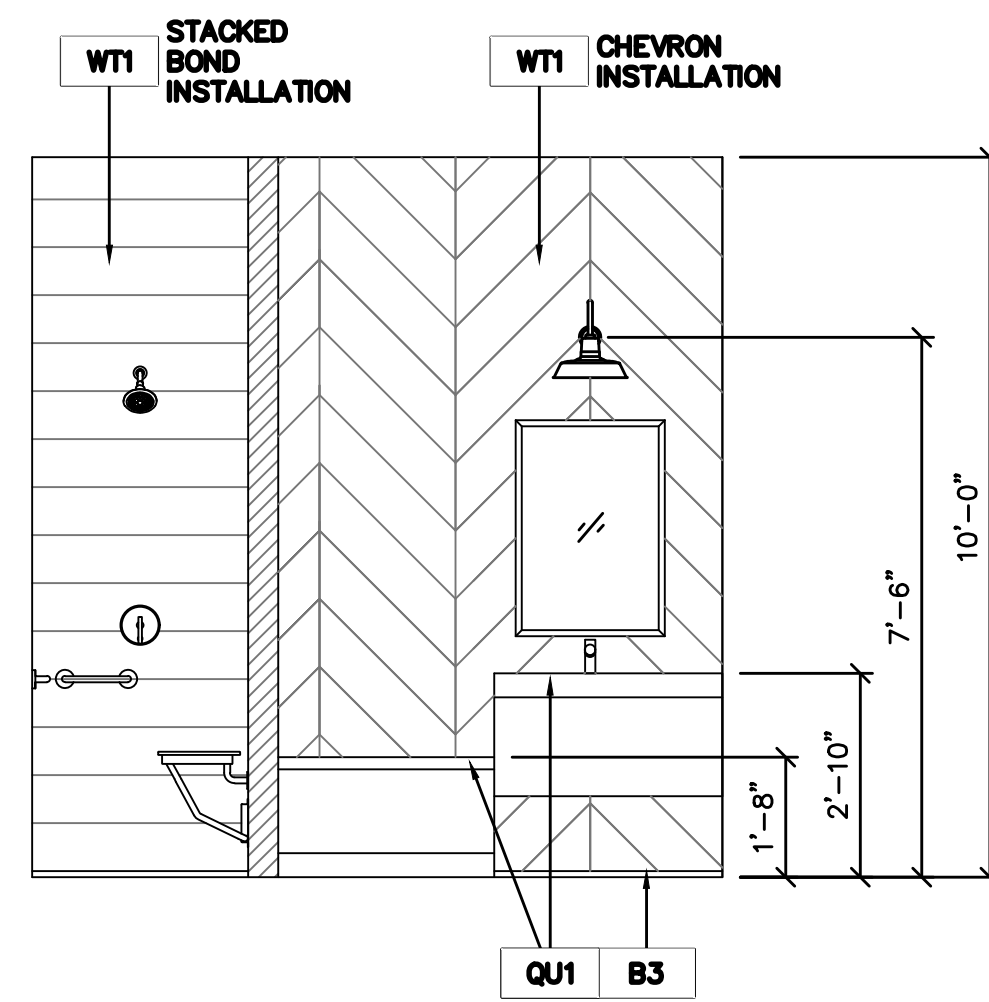


6
26 ELEVATION - ADA SHOWER

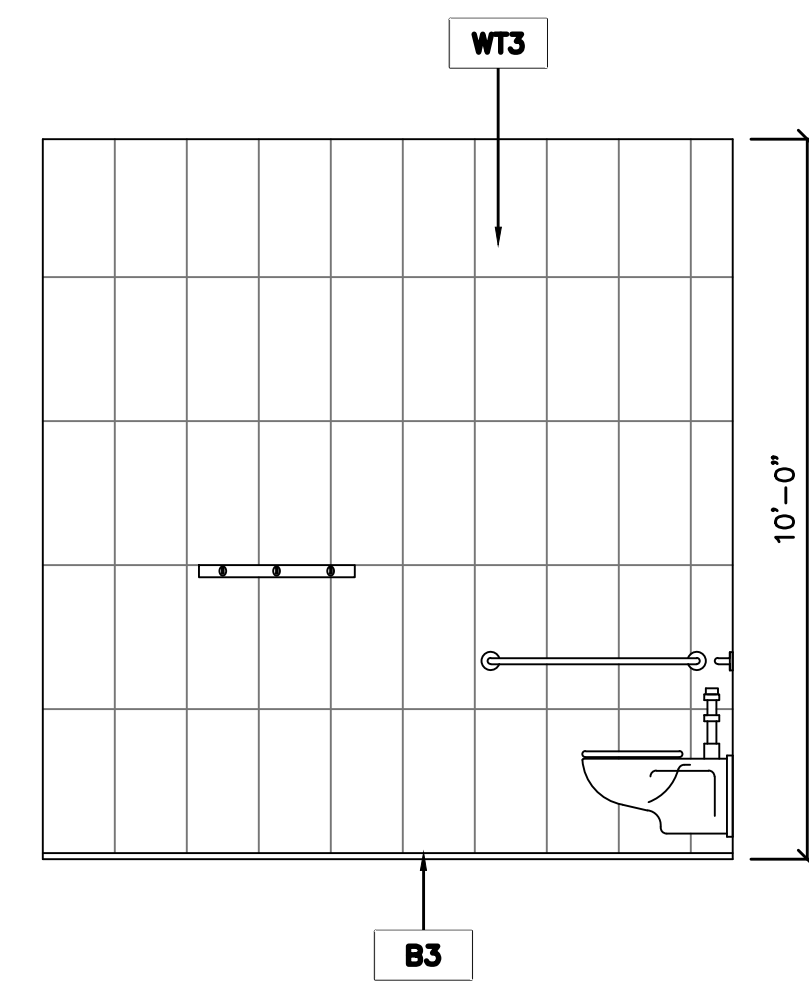

7
26 ELEVATION - ADA SHOWER

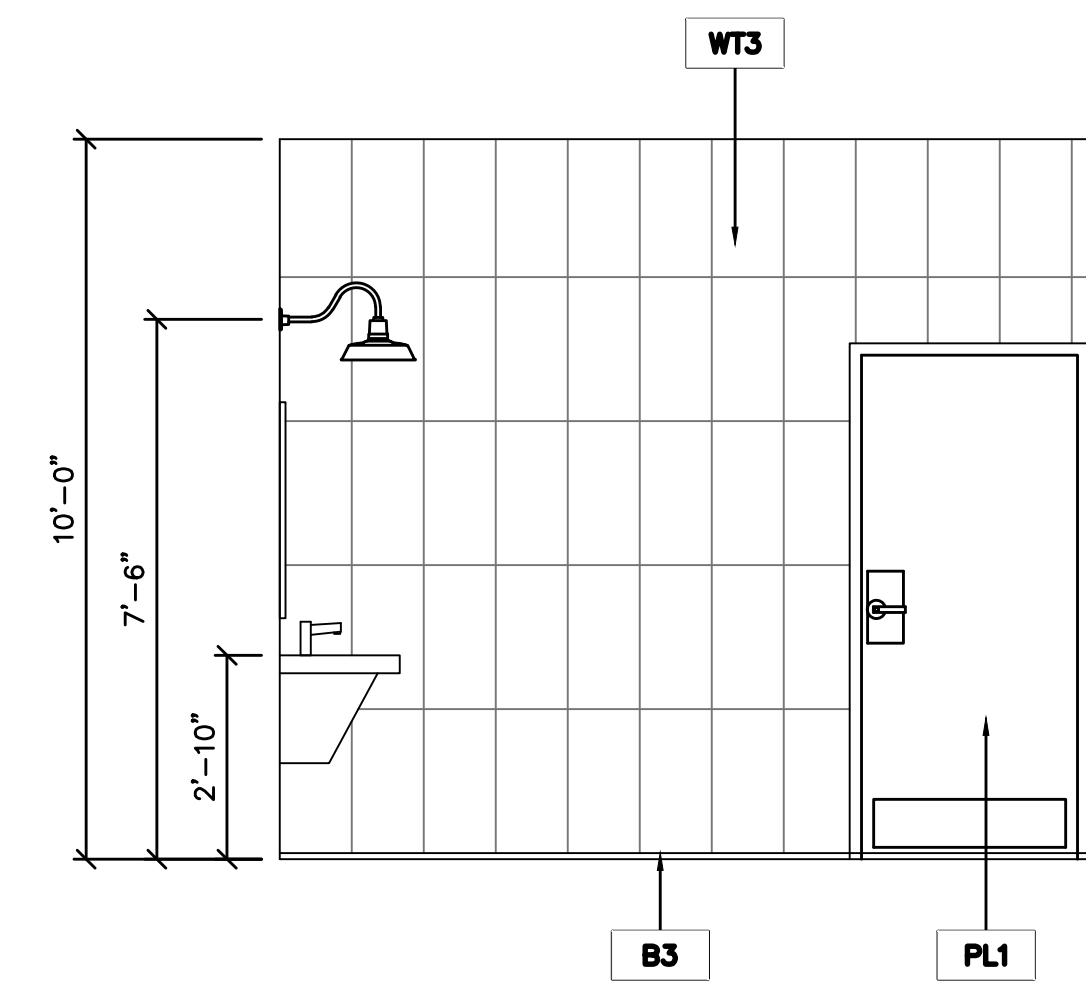


8
26 ELEVATION - ADA SHOWER

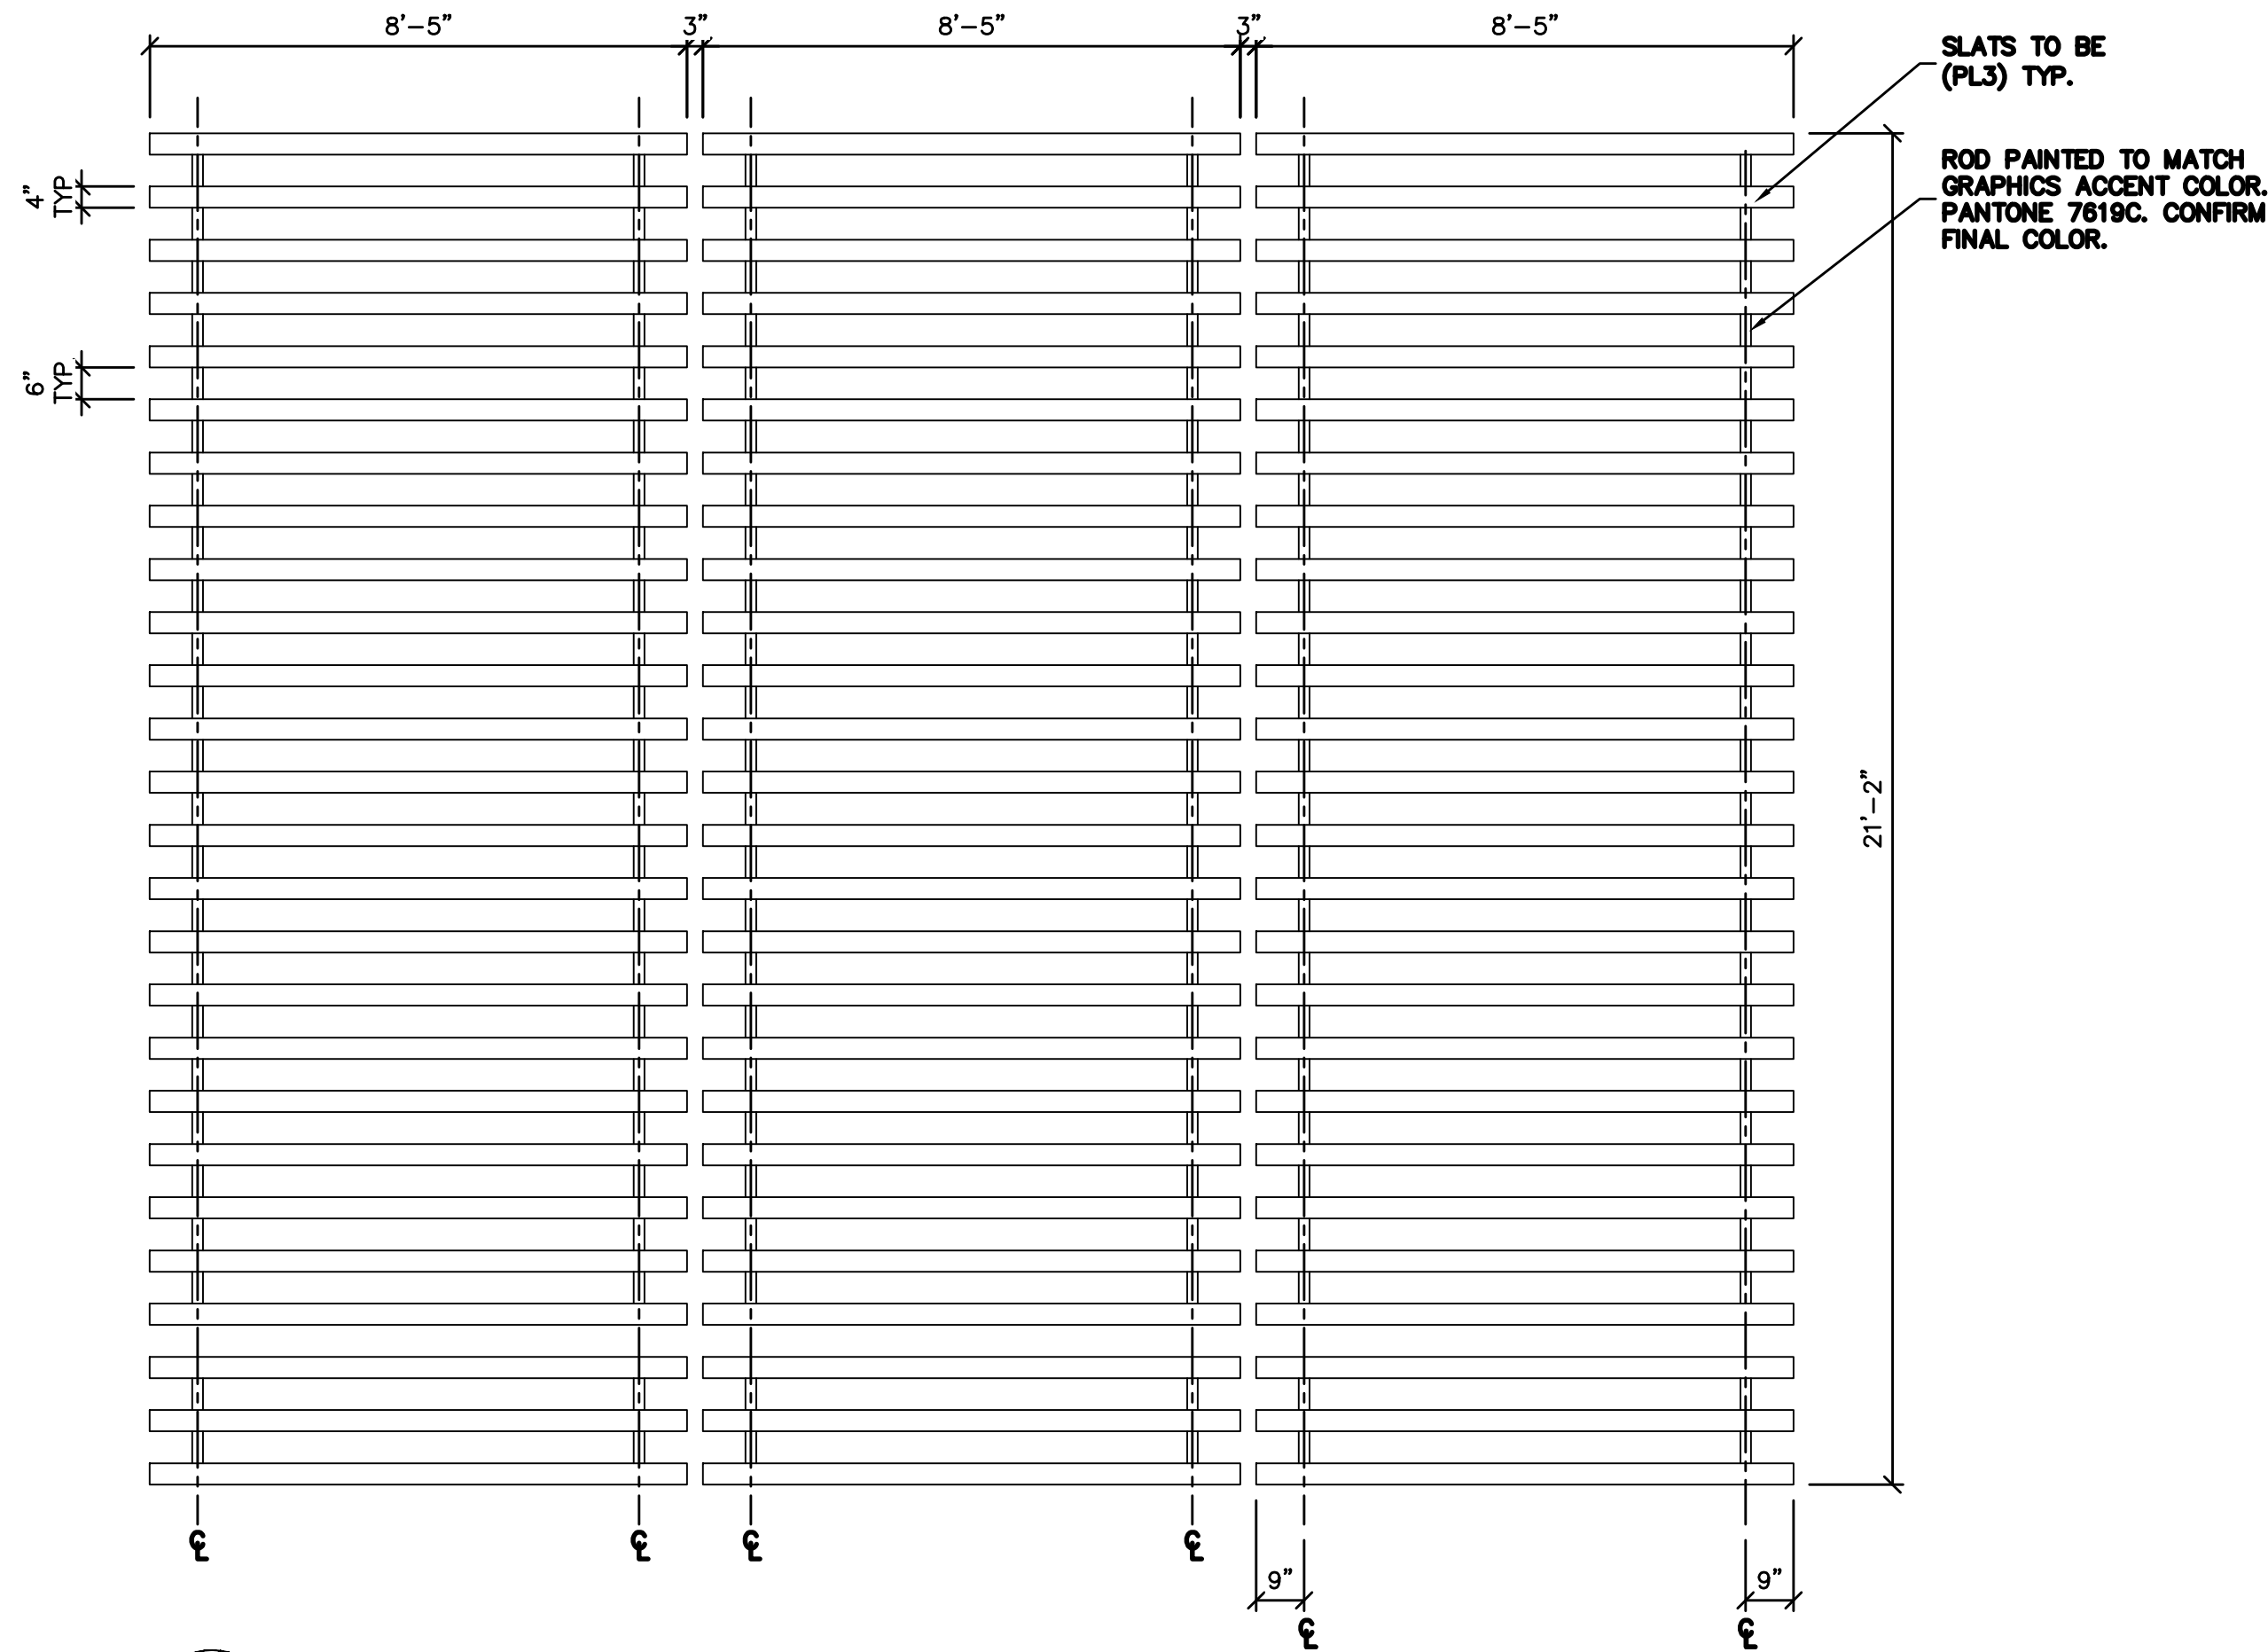


A1
27

DETAIL - CEILING CLOUD @ CASHIER (PLAN VIEW)

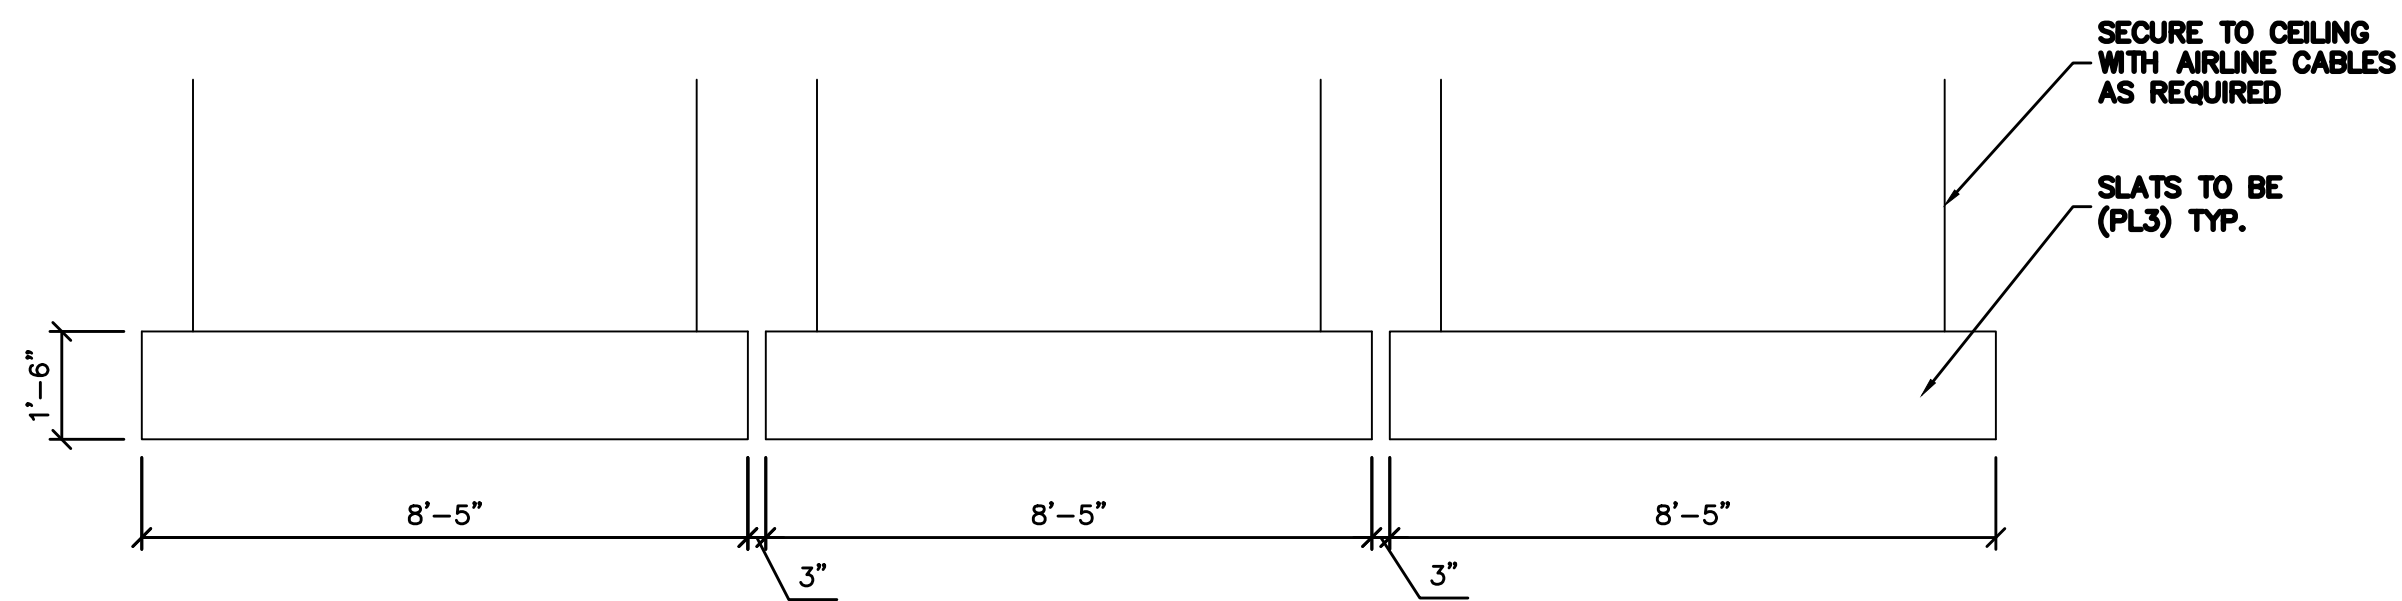


A2
27

DETAIL - CEILING CLOUD @ CASHIER (SIDE)

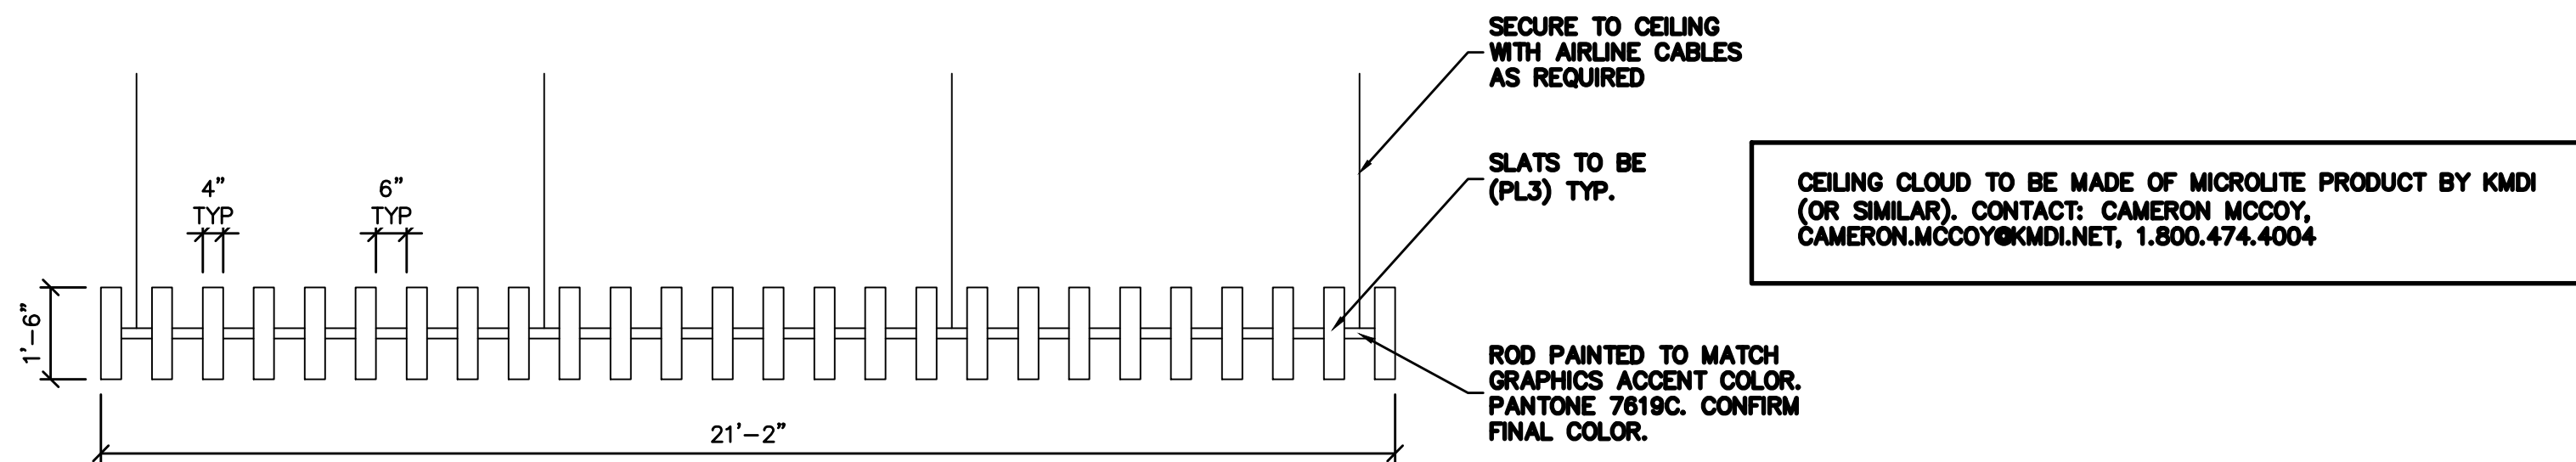


A3
27


DETAIL - CEILING CLOUD @ CASHIER (FRONT)

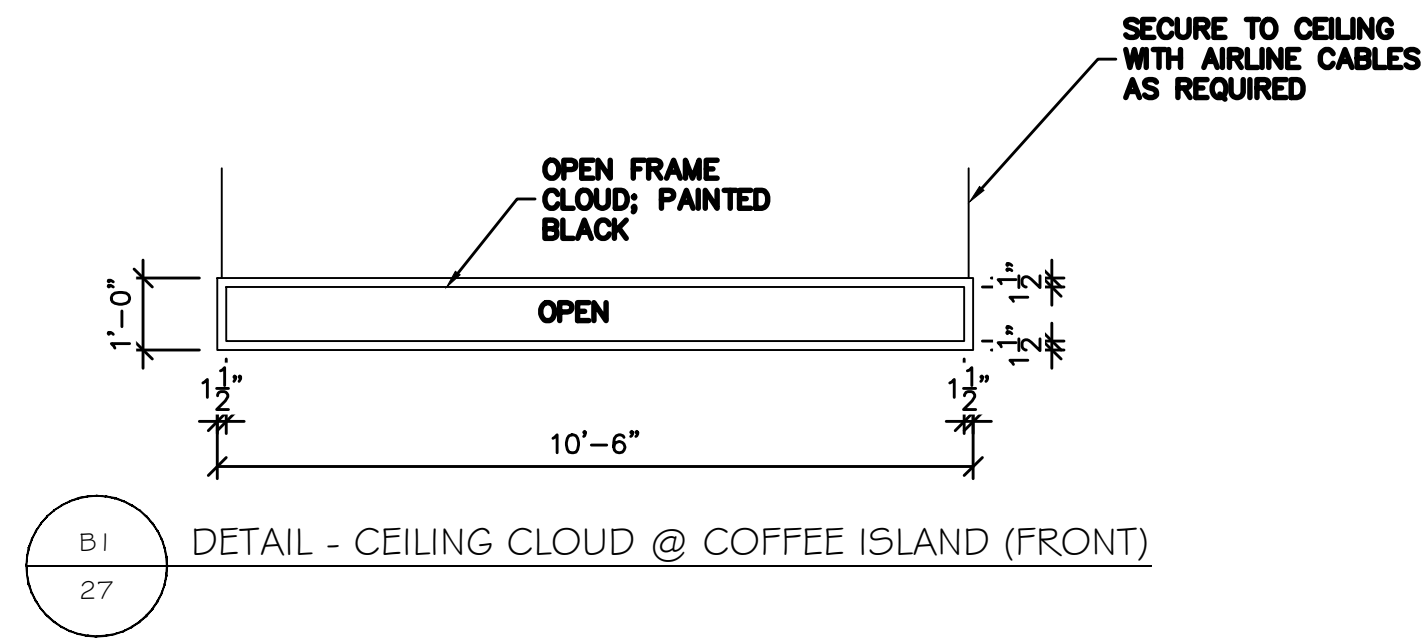

DETAIL - CEILING CLOUD @ COFFEE ISLAND (FRONT)

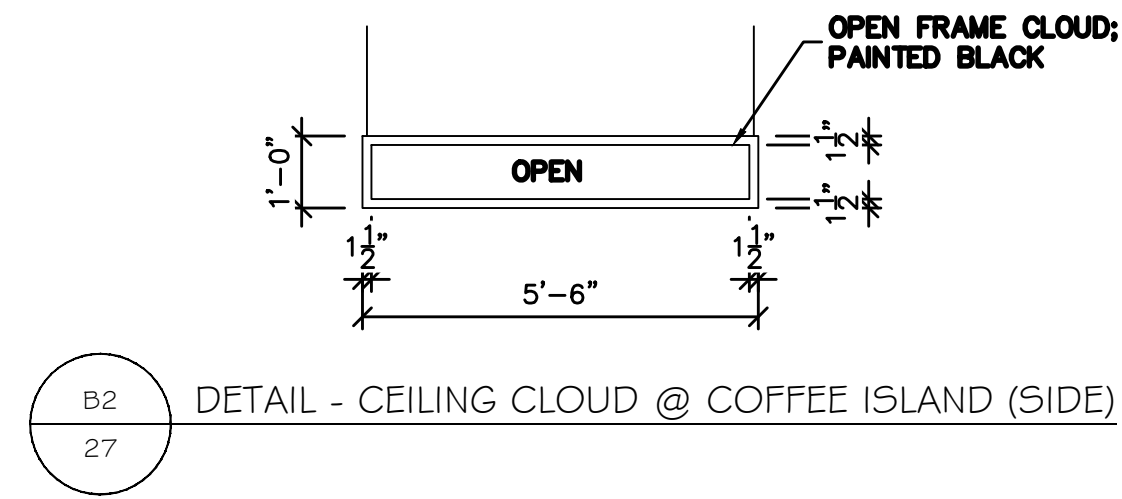





DETAIL - CEILING CLOUD @ COFFEE ISLAND (SIDE)










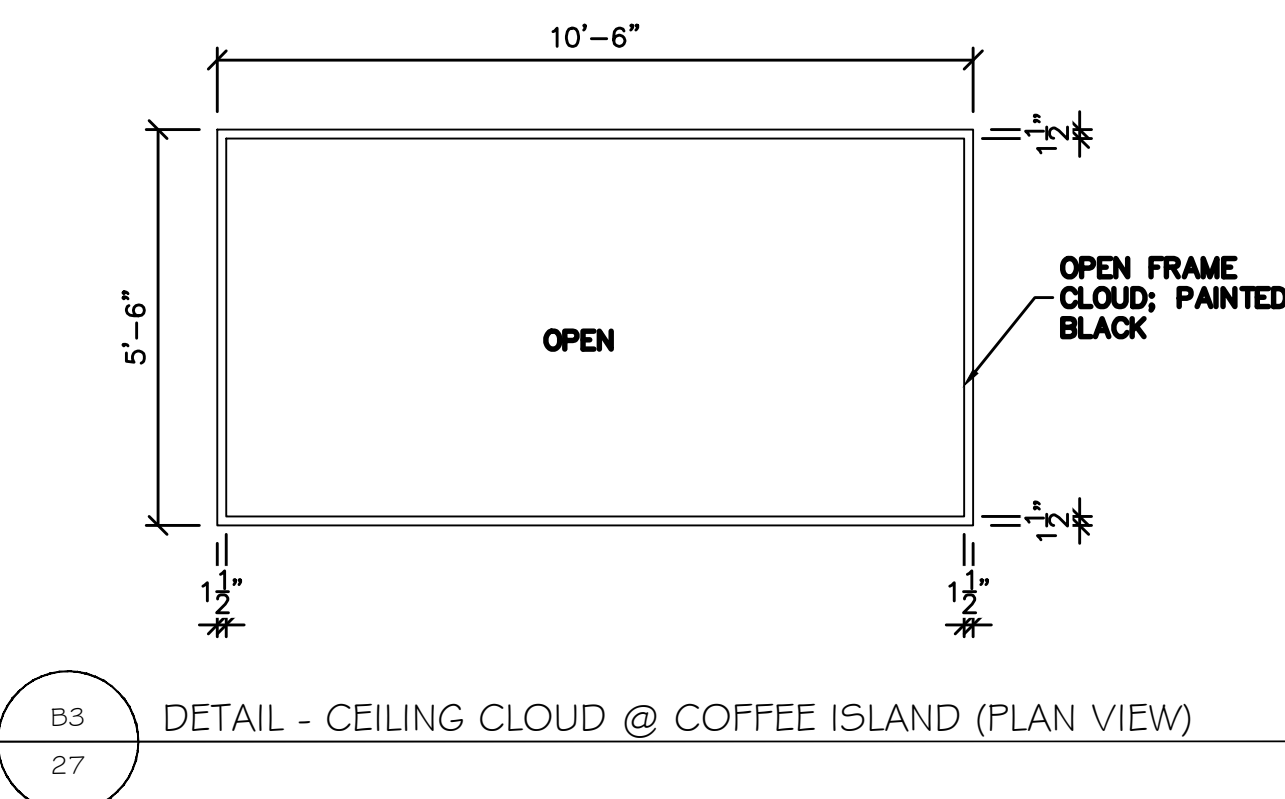


DETAIL - CEILING CLOUD @ COFFEE ISLAND (PLAN VIEW)



CEILING CLOUD TO BE MADE OF MICROLITE PRODUCT BY KMDI (OR SIMILAR). CONTACT: CAMERON MCCOY, CAMERON.MCCOY@KMDI.NET, 1.800.474.4004

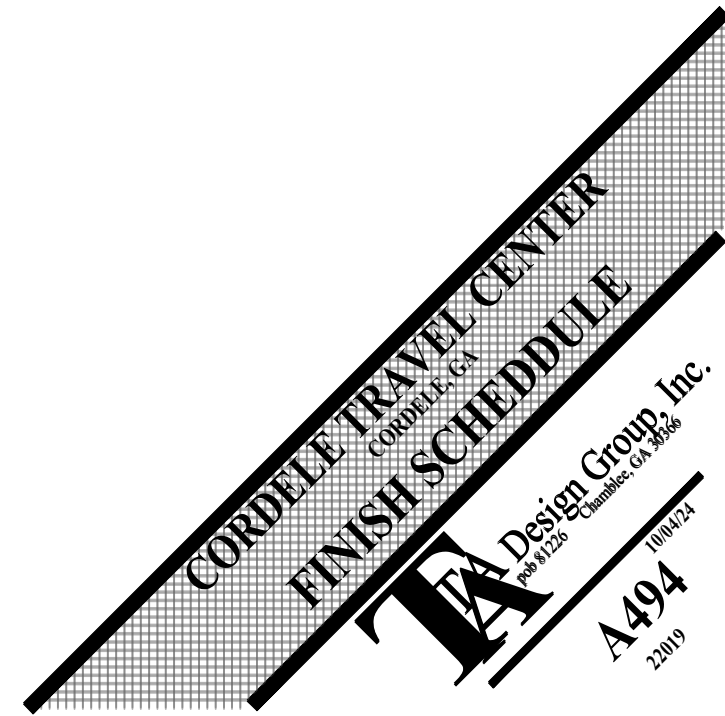

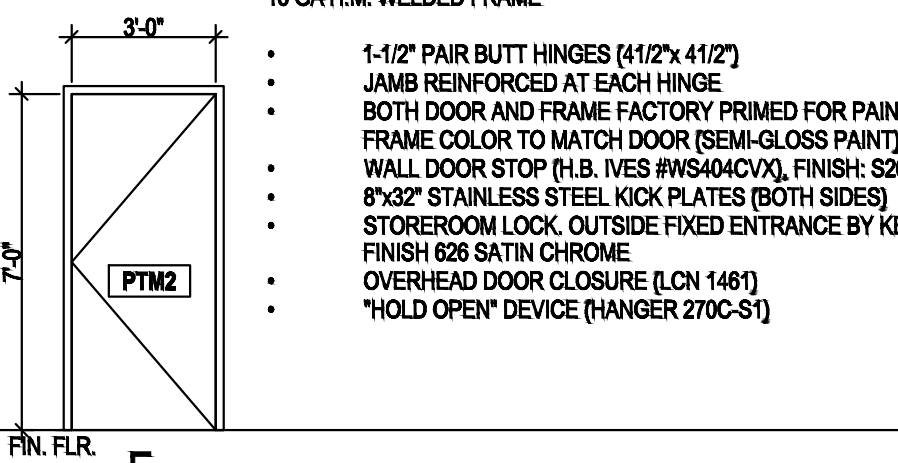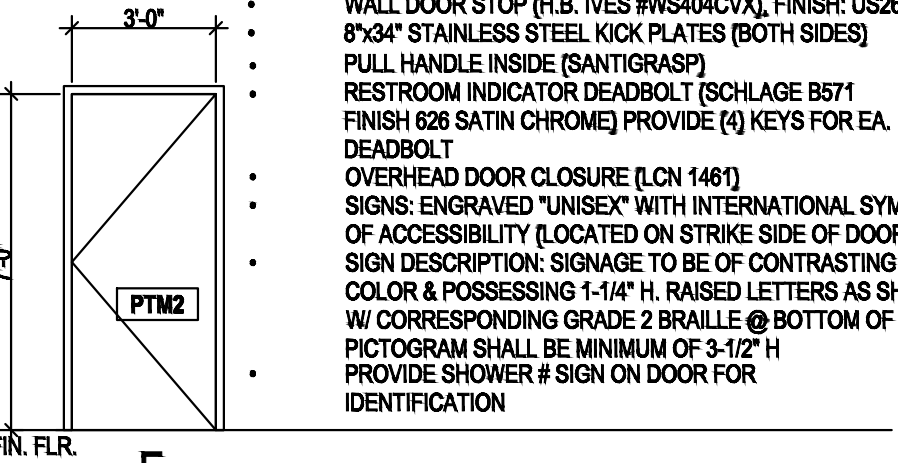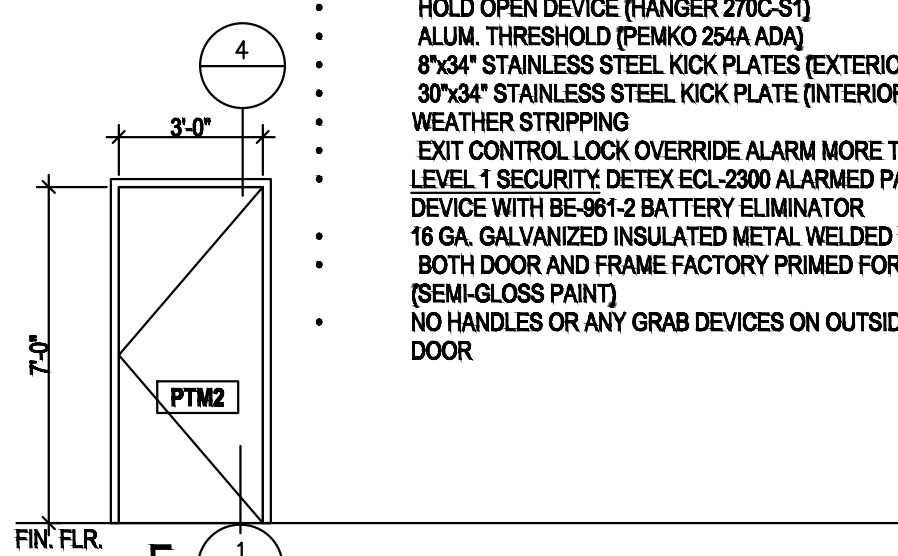MAINTENANCE CLOSET DOOR: 1-3/4" x 3'-0" x 7'-0" 18 GA H.M. DOOR 16 GA H.M. WELDED FRAME  1-1/2" PAIR BUTT HINGES (41/2"x 41/2") - JAMB REINFORCED AT EACH HINGE - BOTH DOOR AND FRAME FACTORY PRIMED FOR PAINTING, FRAME COLOR TO MATCH DOOR (SEMI-GLOSS PAINT) - WALL DOOR STOP (H.B. IVES #WS404CV), FINISH: S26D 8"x32" STAINLESS STEEL KICK PLATES (BOTH SIDES) - STOREROOM LOCK, OUTSIDE FIXED ENTRANCE BY KEY ONLY, FINISH 826 SATIN CHROME - OVERHEAD DOOR CLOSURE (LCN 1461) *HOLD OPEN* DEVICE (HANGER 270C-S1)	RESTROOM/SHOWER DOOR: 1-3/4" 18 GA H.M. DOOR WITH 16 GA H.M. WELDED FRAME  11/2" PAIR BUTT HINGES (41/2"x 41/2") - JAMB REINFORCED AT EACH HINGE - BOTH DOOR AND FRAME FACTORY PRIMED FOR PAINTING, FRAME COLOR TO MATCH DOOR (SEMI-GLOSS PAINT) - WALL DOOR STOP (H.B. IVES #WS404CV), FINISH: US26D 8"x34" STAINLESS STEEL KICK PLATES (BOTH SIDES) - PULL HANDLE INSIDE (SANTIGRASP) - RESTROOM INDICATOR DEADBOLT (SCHLAGE B571, FINISH 826 SATIN CHROME) PROVIDE (4) KEYS FOR EA. DEADBOLT - OVERHEAD DOOR CLOSURE (LCN 1461) - SIGNS: ENGRAVED "UNISEX" WITH INTERNATIONAL SYMBOL OF ACCESSIBILITY (LOCATED ON STRIKE SIDE OF DOOR) - SIGN DESCRIPTION: SIGNAGE TO BE OF CONTRASTING COLOR & POSSESSING 1-1/4" H. RAISED LETTERS AS SHOWN W/ CORRESPONDING GRADE 2 BRAILLE @ BOTTOM OF SIGN. PICTOGRAM SHALL BE MINIMUM OF 3-1/2" H. PROVIDE SHOWER # SIGN ON DOOR FOR IDENTIFICATION	EXTERIOR EXIT DOOR: 3'-0" X 7'-0" 18 GA. GALVANIZED INSULATED METAL DOOR  - MAX. U-VALUE: 0.37 PER IECC 2012 11/2 PAIR BUTT HINGES (4 1/2"x 4 1/2" NRP) - HEAVY DUTY OVERHEAD CLOSER (LCN4040) - HOLD OPEN DEVICE (HANGER 270C-S1) - ALUM. THRESHOLD (PEMKO 254A ADA) 8"x34" STAINLESS STEEL KICK PLATES (EXTERIOR) 30"x34" STAINLESS STEEL KICK PLATE (INTERIOR) - WEATHER STRIPPING - EXIT CONTROL LOCK OVERRIDE ALARM MORE THAN 93db - LEVEL 1 SECURITY DETEX EGL-2300 ALARMED PANIC EXIT DEVICE WITH BE-861-2 BATTERY ELIMINATOR 16 GA. GALVANIZED INSULATED METAL WELDED FRAME - BOTH DOOR AND FRAME FACTORY PRIMED FOR PAINTING (SEMI-GLOSS PAINT) - NO HANDLES OR ANY GRAB DEVICES ON OUTSIDE OF DOOR
--	---	---

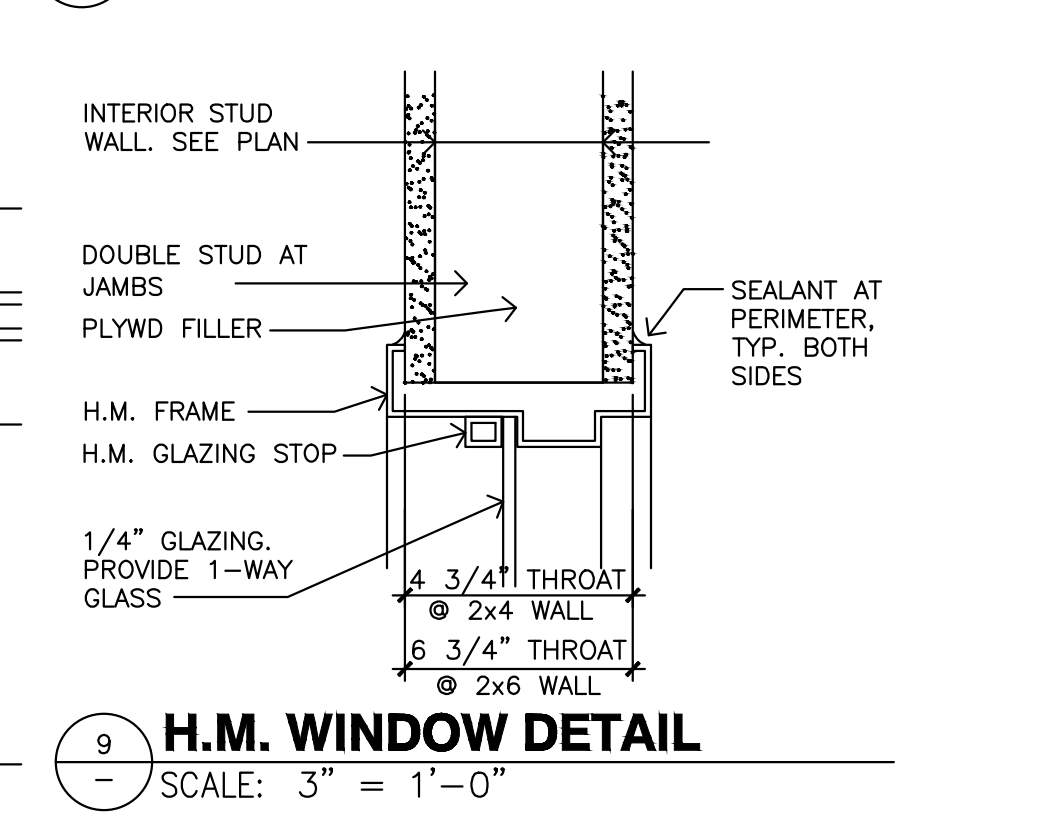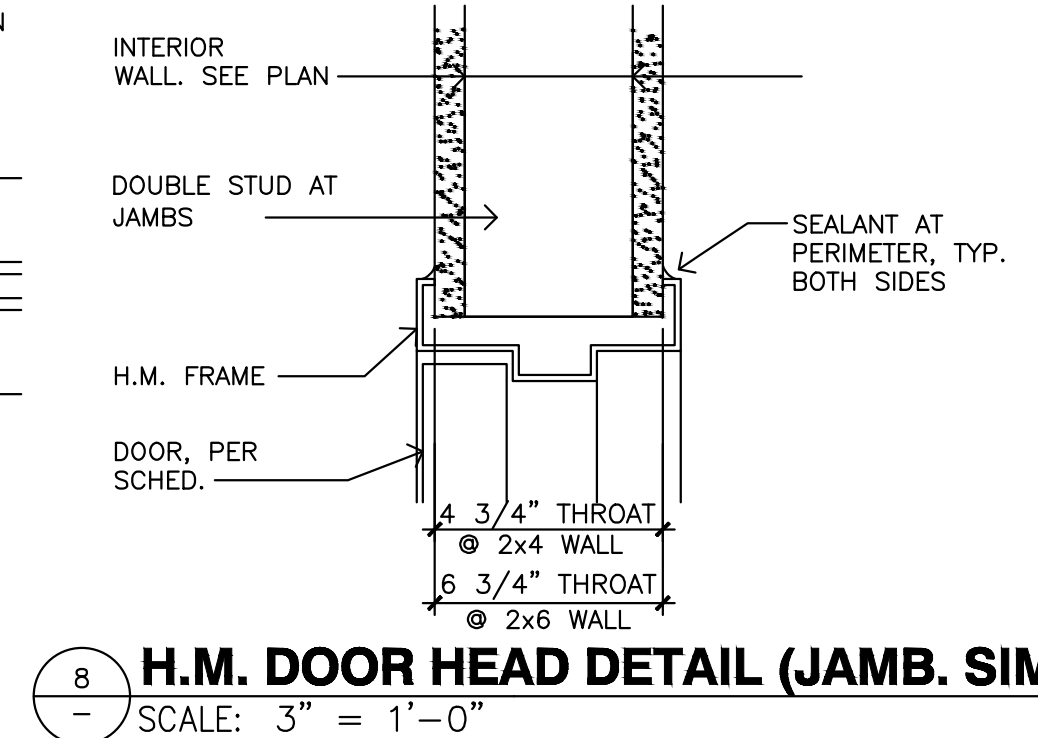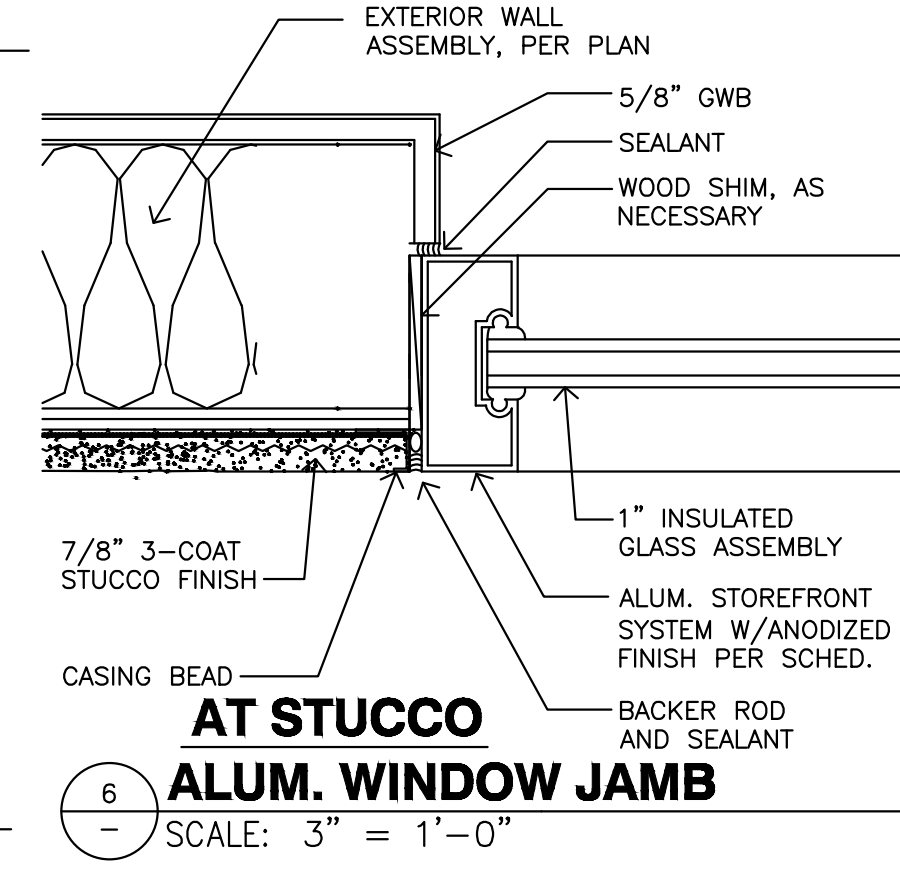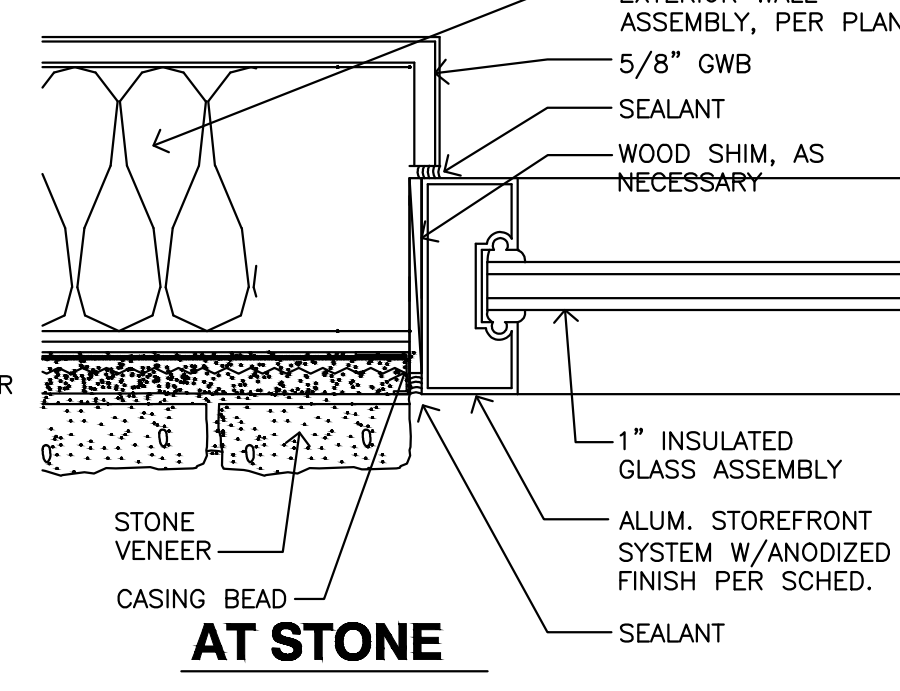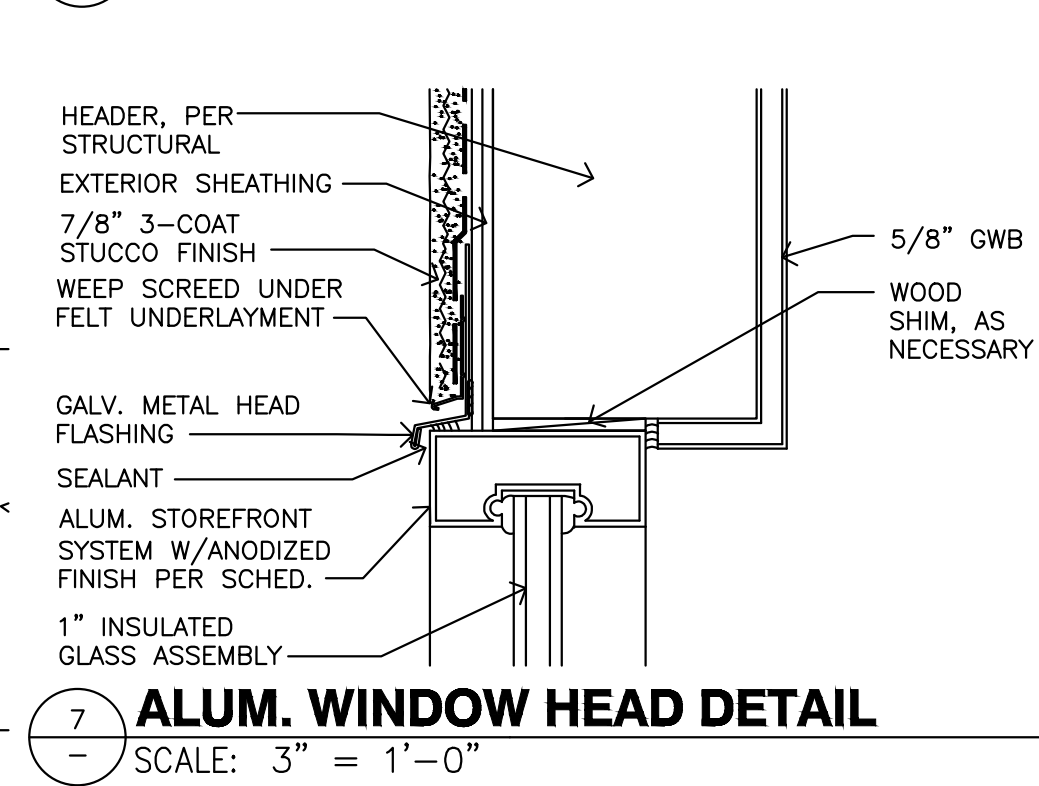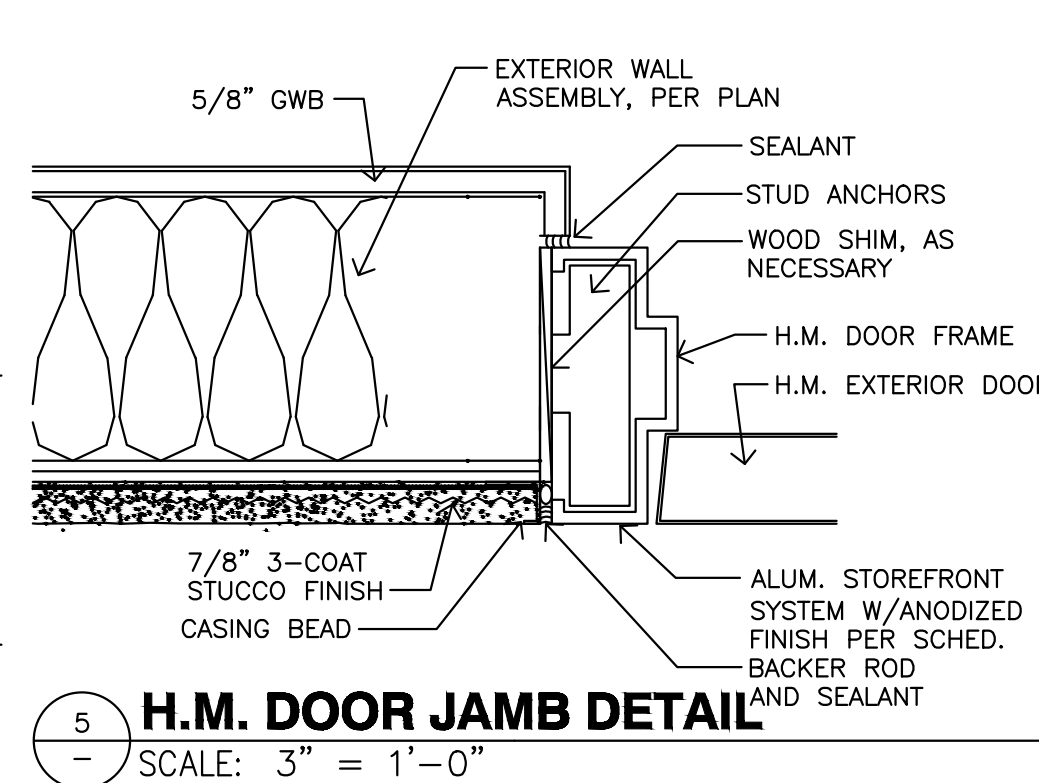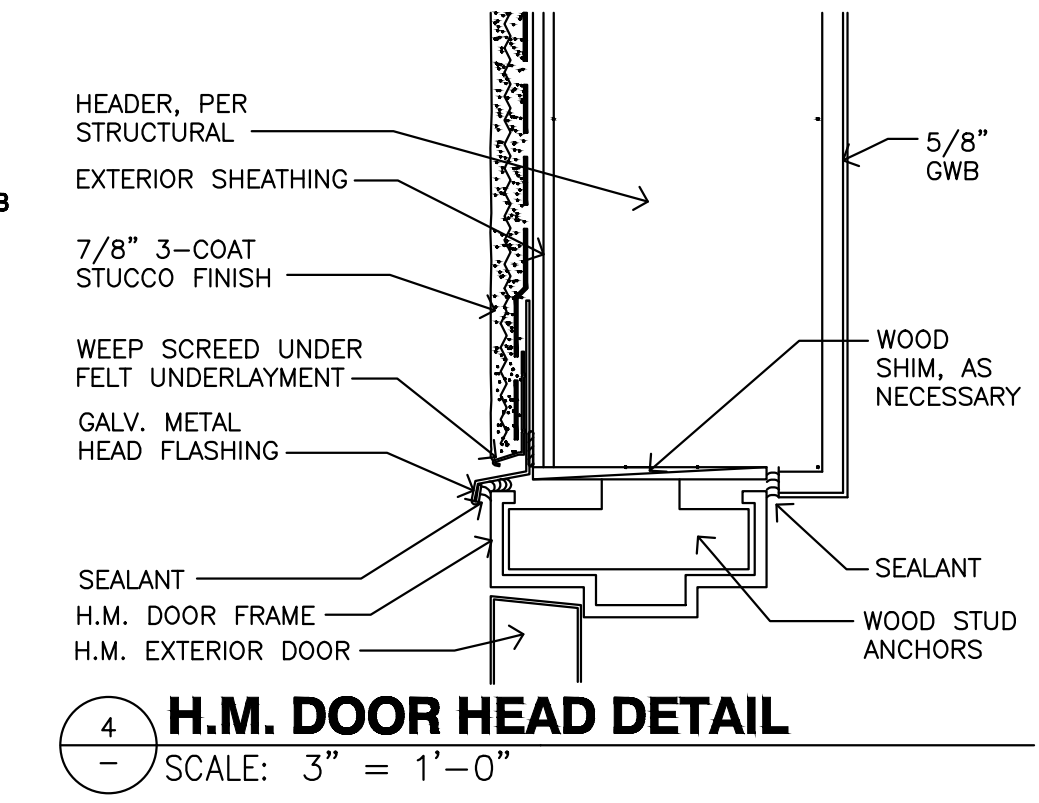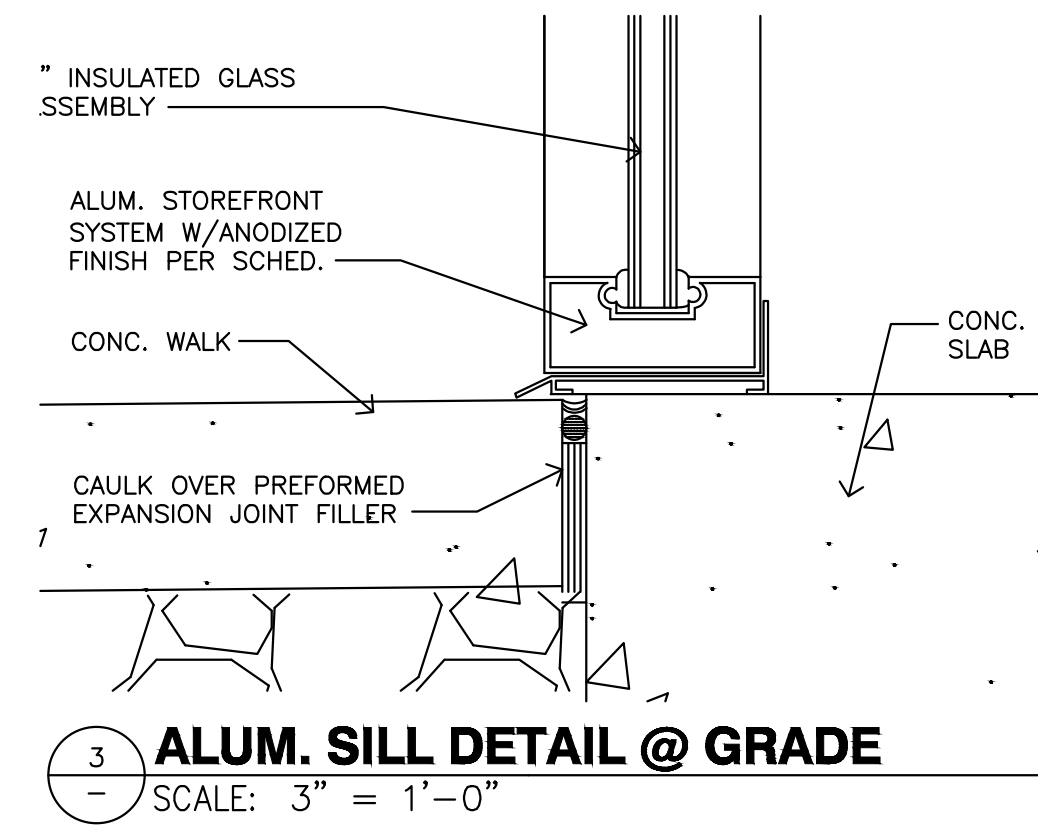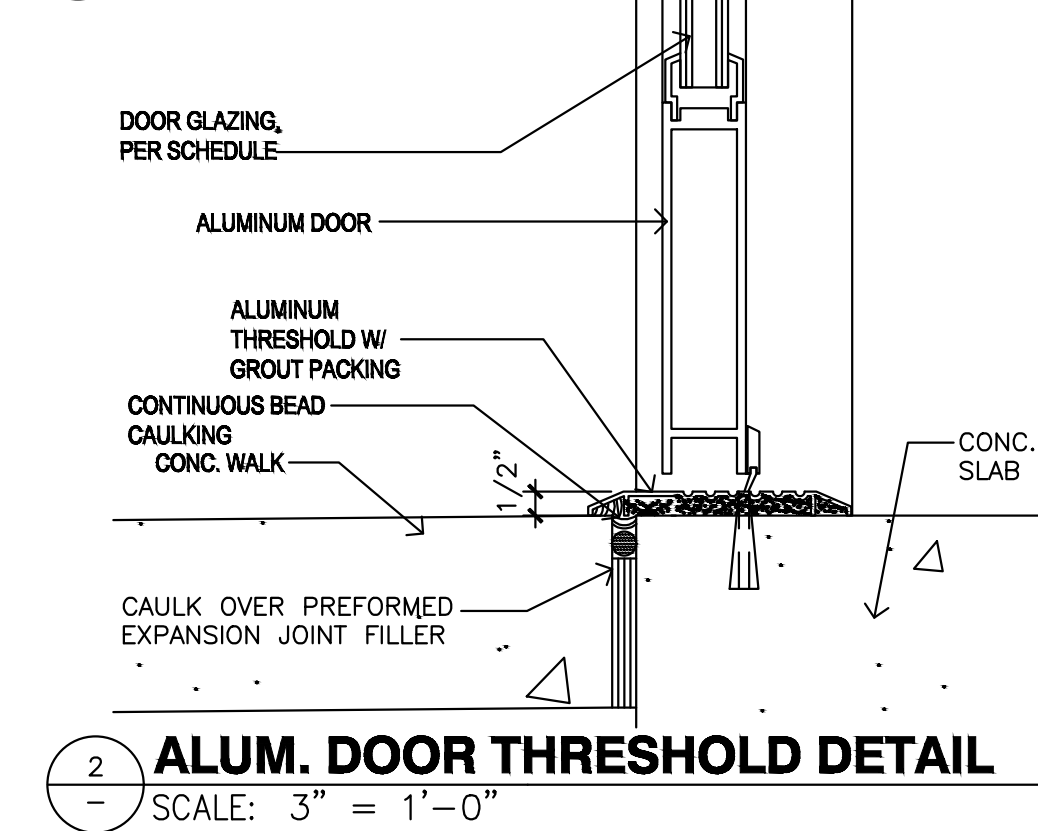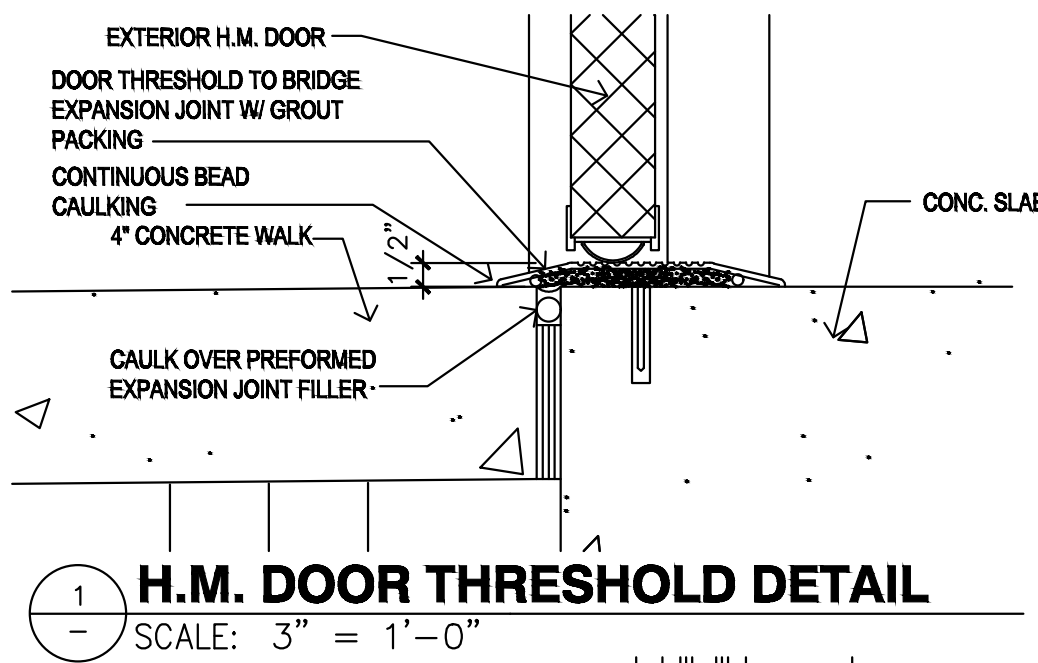


NOTES A. FOR GROUP M OCCUPANCY, KEY-OPERATED LOCKING DEVICES, FROM THE EGRESS SIDE MAY BE USED ON THE MAIN EXTERIOR DOORS PROVIDED 1. THE LOCKING DEVICE IS READILY DISTINGUISHABLE LOCKED; AND, THERE IS A READILY VISIBLE DURABLE SIGN ON OR ADJACENT TO THE DOOR STATING "THIS DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED"; THIS SIGN SHALL BE IN LETTERS NOT LESS THAN 1-INCH HIGH ON A CONTRASTING BACKGROUND AND; 2. THE USE OF KEY-OPERATED LOCKING DEVICE IS REVOKABLE BY THE BUILDING OFFICIAL FOR DUE CAUSE; AND; 3. WHERE EGRESS DOORS ARE USED IN PAIRS, APPROVED AUTOMATIC FLUSH BOLTS SHALL BE PERMITTED TO BE USED, PROVIDED THAT THE DOOR LEAF HAVING THE AUTOMATIC FLUSH BOLTS HAS NO DOOR KNOB OR SURFACE-MOUNTED HARDWARE. B. MANUALLY OPERATED EDGE OR SURFACE MOUNTED FLUSH BOLTS AND SURFACE BOLTS ARE PROHIBITED. EXCEPTION: WHERE A PAIR OF DOORS SERVES AS A STORAGE OR EQUIPMENT ROOM, MANUALLY OPERATED EDGE OR SURFACE MOUNTED BOLTS ARE PERMITTED ON THE INACTIVE LEAF. C. THE UNLATCHING OF ANY LEAF OR ANY EXIT DOOR SHALL NOT REQUIRE MORE THAN ONE OPERATION. EXCEPTION: WHERE MANUALLY OPERATED BOLT LOCKS ARE PERMITTED BY SECTION 1008.1.9.4; D. DOORS WITH AUTOMATIC FLUSH BOLTS AS PERMITTED BY SECTION 1008.1.9.3, EXCEPTION 3. D. HANDLES, PULLS, LATCHES, AND LOCKS SHALL HAVE A SHAPE THAT IS EASY TO GRASP WITH ONE HAND AND DOES NOT REQUIRE TIGHT GRASPING, PINCHING, OR TWISTING OF THE WRIST TO OPERATE. E. ALL GLAZING IN HAZARDOUS LOCATIONS IS REQUIRED TO BE OF SAFETY GLAZING MATERIAL. GLAZING IN INGRESS AND EGRESS DOORS AND GLAZING IN FIXED OR OPERABLE PANELS ADJACENT TO A DOOR WHERE THE NEAREST EXPOSED EDGE OF THE GLAZING IS WITHIN A 24 - INCH ARC OF EITHER VERTICAL EDGE OF THE DOOR IN A CLOSED POSITION PER 2012 IBC SECTION 2406.4. F. ALL METAL DOOR FRAMES TO BE PROVIDED WITH SILENCERS. G. ALL EXTERIOR HOLLOW CORE METAL DOORS ARE TO BE INSULATED. DOOR AND FRAME TO BE SHOP PRIMED AND PAINTED. H. ALL DOOR HARDWARE IS TO BE COMMERCIAL GRADE AND QUALITY. J. GLAZING SYSTEM FINISH TO BE REVIEWED AND APPROVED BY ARCHITECT PRIOR TO ORDERING. SUBMIT SAMPLES FOR SELECTION AND APPROVAL. L. FIELD VERIFY ALL WINDOW OPENING DIMENSIONS. M. MINIMUM GLASS (EA. PANE) THICKNESS TO BE 1/4". N. FURNISH AND INSTALL ALL HARDWARE OF EVERY SORT AND DESCRIPTION TO ADEQUATELY EQUIP THE ENTIRE PROJECT IN ACCORDANCE WITH THE DRAWINGS, SPECIFICATIONS AND ALL LOCAL AND STATE CODES. O. ALL DOORS SHALL COMPLY WITH 2012 IBC. P. THE PROVIDED HARDWARE SCHEDULE IS INTENDED TO COVER ALL DOORS AND REQUIRED HARDWARE AND ESTABLISH A TYPE AND STANDARD OF QUALITY. IT SHALL BE THE SPECIFIC DUTY OF THE HARDWARE SUPPLIER / CONTRACTOR TO EXAMINE THE PLANS AND SPECIFICATIONS AND FURNISH AND INSTALL PROPER FOR ALL OPENINGS LISTED OR NOT. Q. DOOR HANDLES, PULLS, LATCHES, LOCKS AND OTHER OPERATING DEVICES SHALL BE INSTALLED 34 INCHES MINIMUM AND 48 INCHES MAXIMUM ABOVE FINISHED FLOOR.	STROUD AND COMPANY
---	----------------------------------

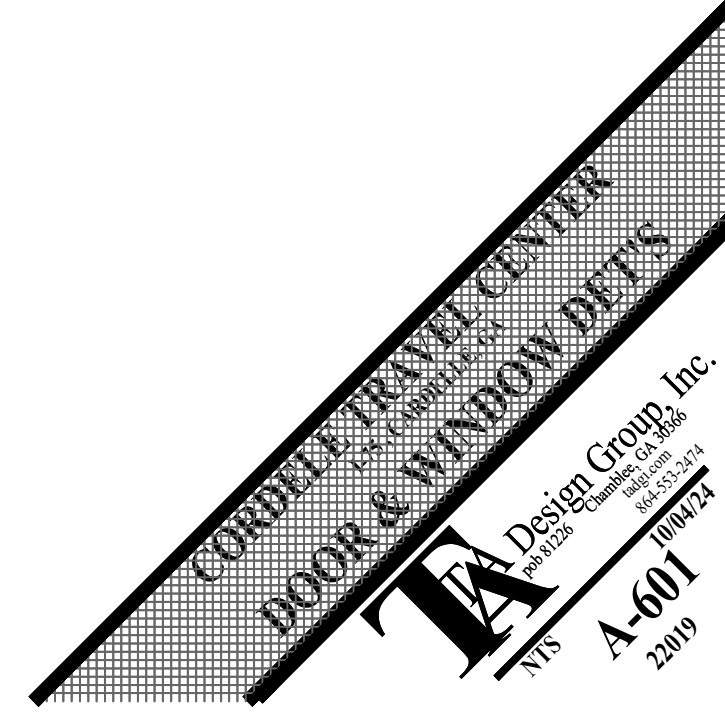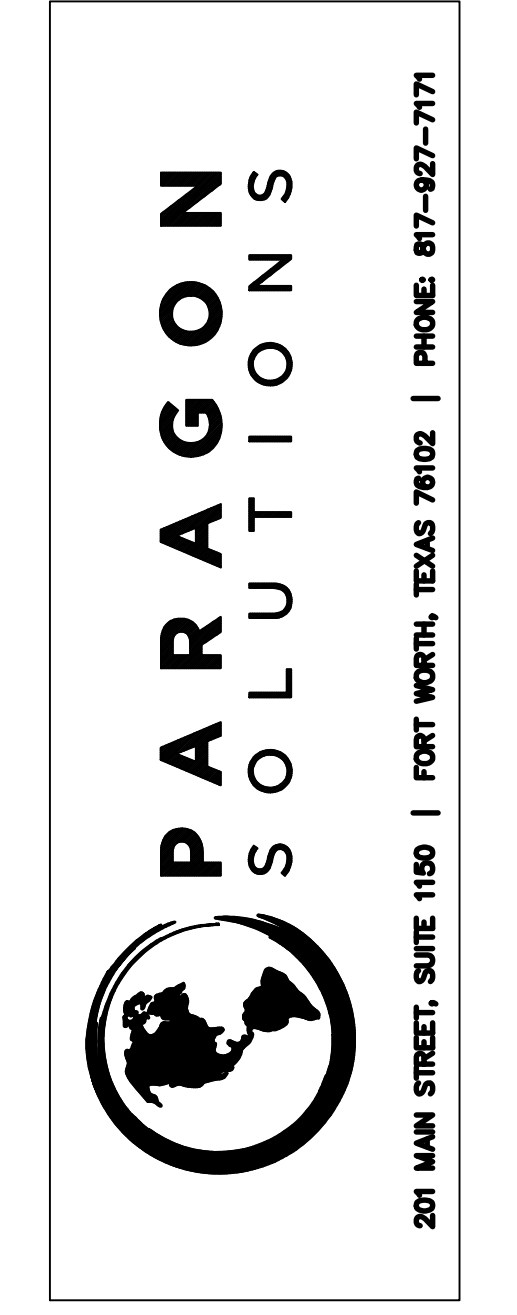


PLUMBING LEGEND:	
○	COLD WATER SUPPLY
●	HOT WATER SUPPLY
○	COLD WATER STUB-UP
●	1" HUB DRAIN
○	FLOOR DRAIN SIZED AS NOTED
○	FLOOR SINK
○	THROUGH DRAIN
○	FREEZE PROOF HOSE BIBB
○	SANITARY SEWER CONNECTION
○	GAS LINE CONNECTION

- PLUMBING NOTES:
- PLUMBING CONTRACTOR TO PROVIDE ALL PIPING, VALVES, AND FITTINGS FOR HOT AND COLD WATER SUPPLY LINES, DRAINS, RESTROOM FIXTURES, AND HOT WATER HEATER.
 - PROVIDE FINAL CONNECTIONS TO ALL FIXTURES AND EQUIPMENT, AND RUN ALL CONDENSATE DRAIN LINES TO FLOOR DRAIN.
 - RECESS FLOOR DRAINS AND SLOPE FLOOR TO DRAINS.
 - BEVERAGE LINES TO FOUNTAIN DRINK DISPENSER TO BE RUN UNDER FINISHED FLOOR AND CHASE. BEVERAGE LINES MAY BE RUN ABOVE CEILING OR THROUGH WALLS (OPTIONAL).
 - ALL PLUMBING MATERIALS AND INSTALLATIONS TO COMPLY WITH LOCAL, STATE, AND NATIONAL PLUMBING CODES, HEALTH DEPARTMENT REGULATIONS AND ETHICAL CONSTRUCTION PROCEDURES.
 - PROVIDE GREASE TRAPS FOR SINKS WHERE REQUIRED BY CITY OR STATE CODE.
 - SUPPLY WATER FILTRATION SYSTEM FOR ALL BEVERAGE EQUIPMENT THROUGHOUT STORE.
 - PROVIDE AUTOMATIC FLUSH DEVICES AND HAND DRYERS IN ALL RESTROOMS.
 - DIMENSIONS SHOWN FOR REFERENCE ONLY. PARAGON SOLUTIONS IS NOT RESPONSIBLE FOR FINAL LOCATIONS OF PLUMBING FIXTURES. FIELD VERIFY ALL DIMENSIONS PRIOR TO STARTING CONSTRUCTION.

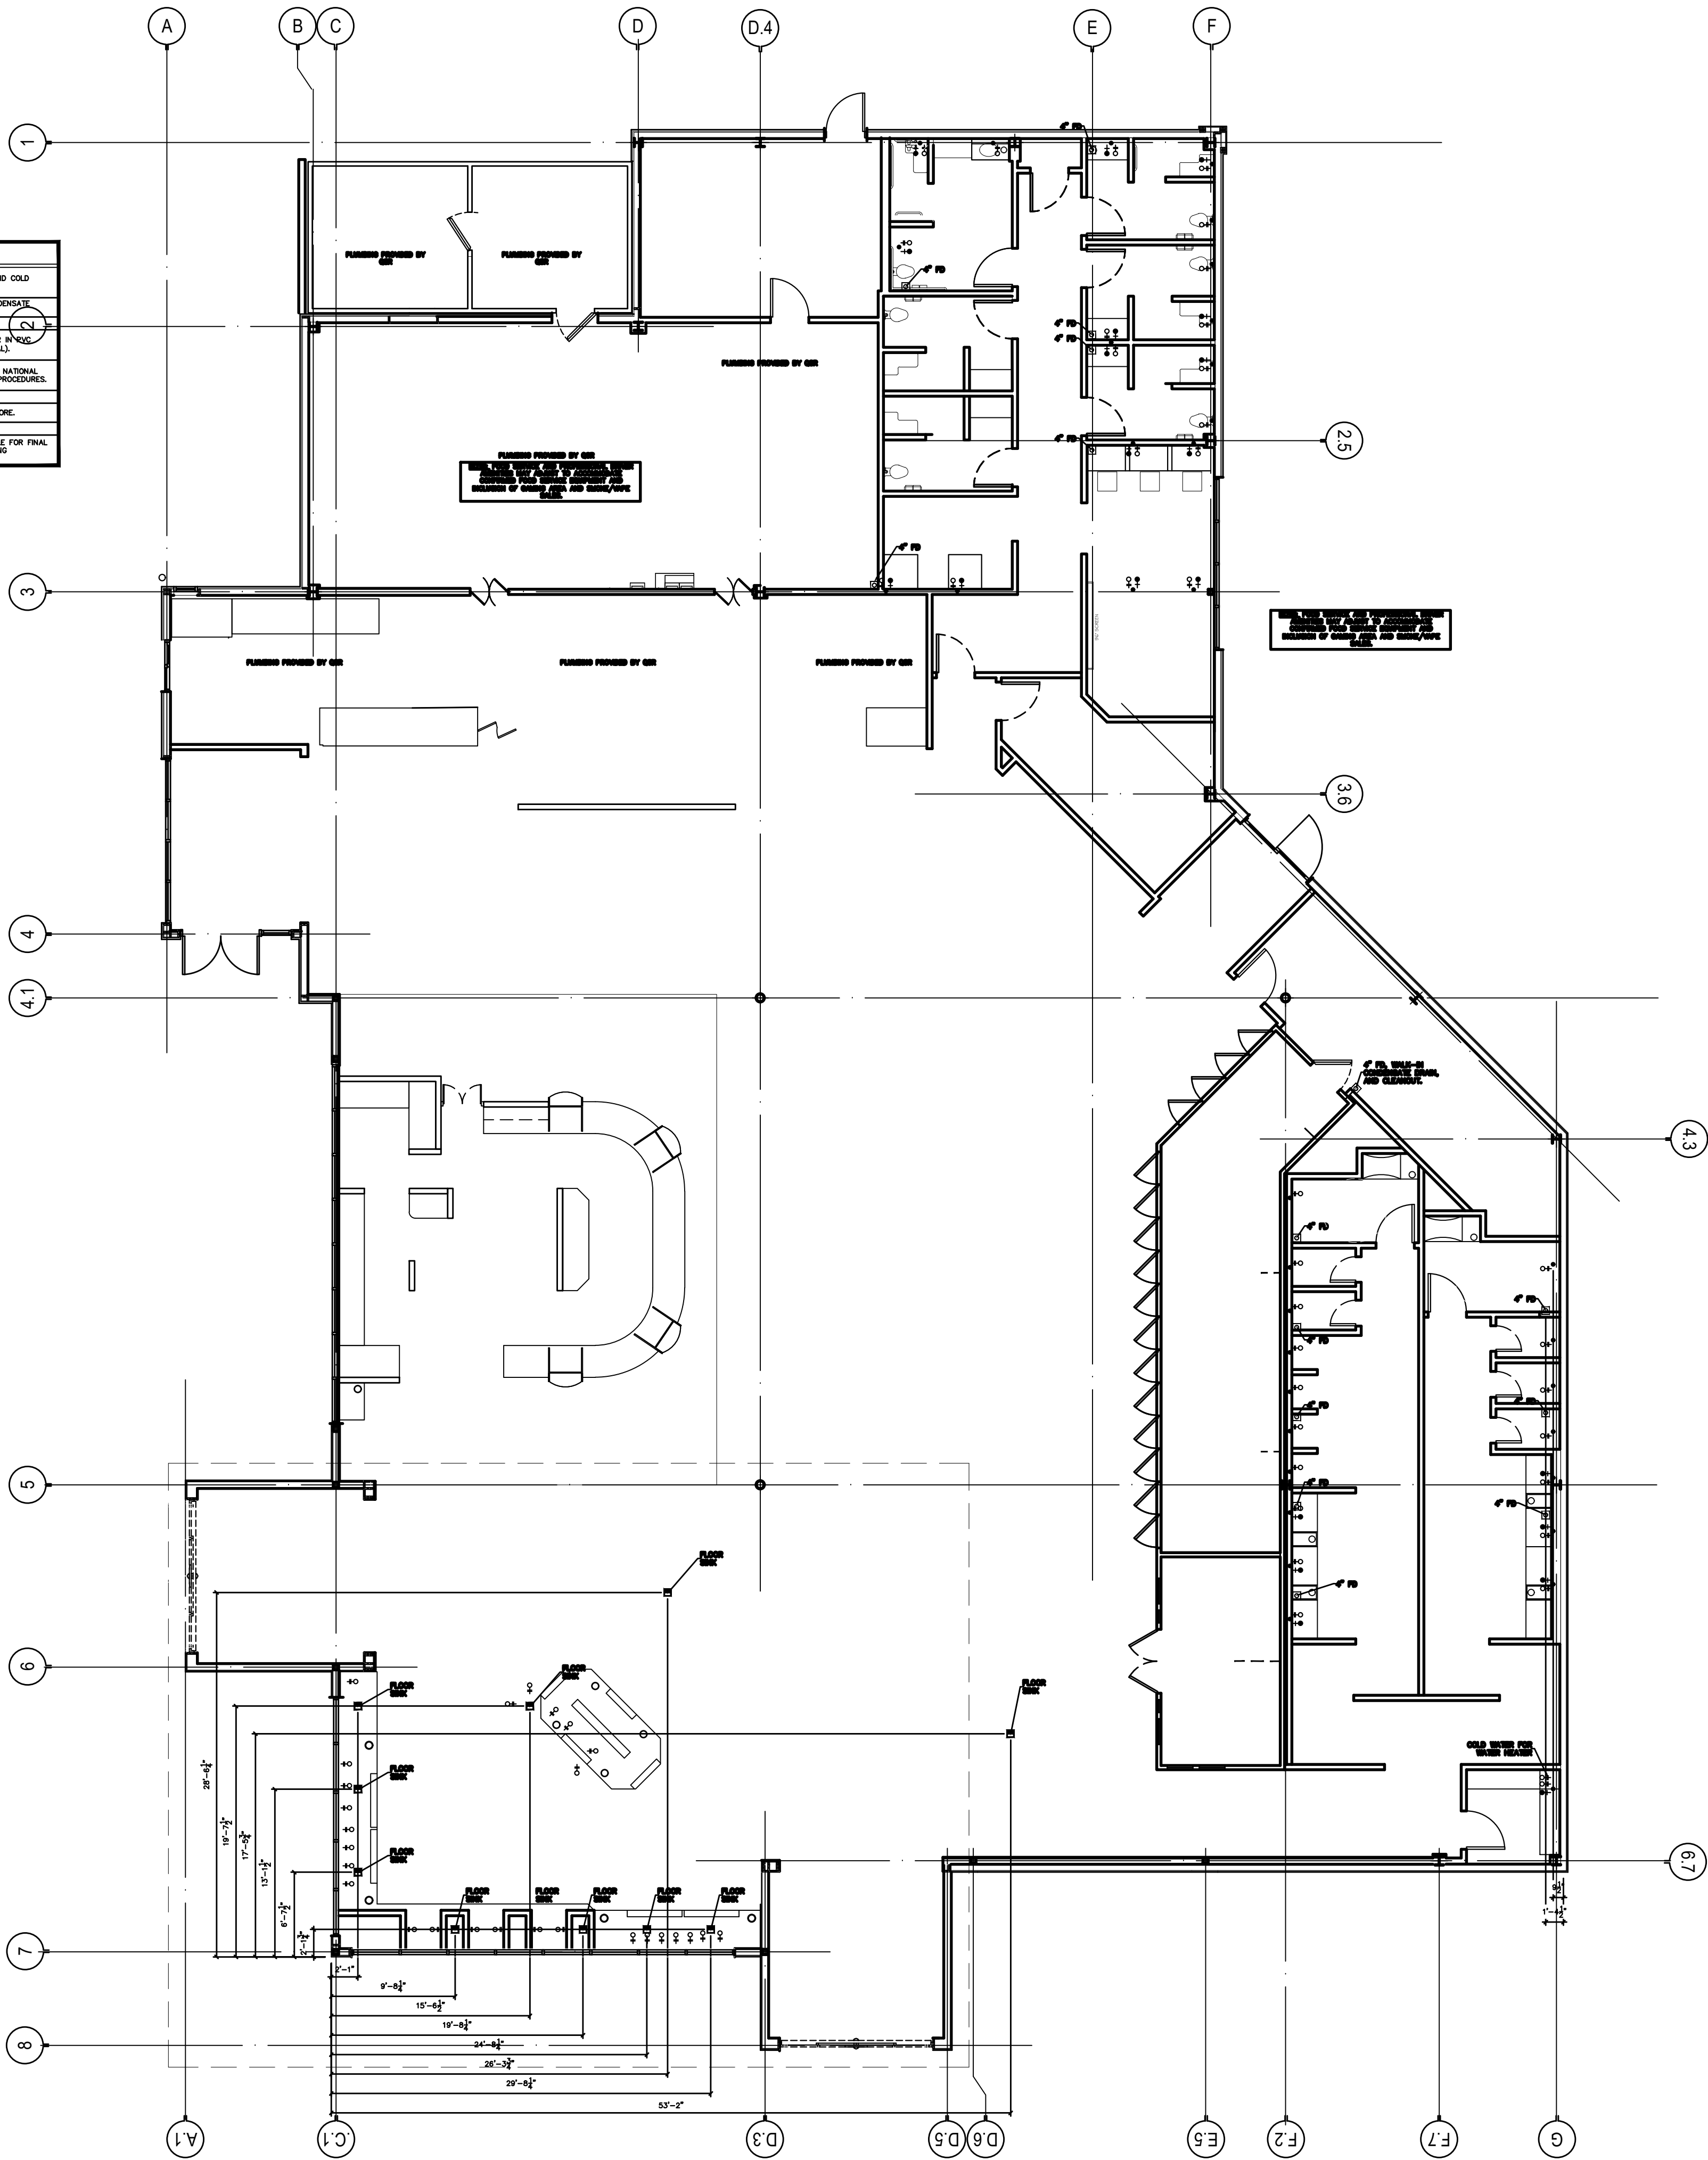

STROUD
AND COMPANY

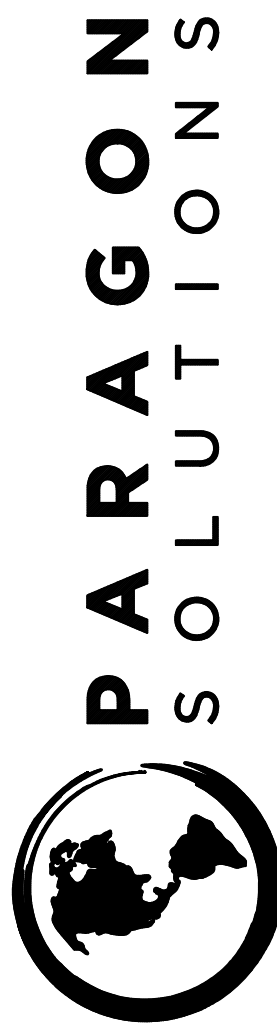

201 MAIN STREET, SUITE 1150 | FORT WORTH, TEXAS 76102 | PHONE: 817-827-7171

